



Da oltre quarant'anni  
viviamo nel mondo dell'illuminazione.  
La nostra storia è la migliore garanzia  
dell'elevata qualità dei prodotti PLG.





We live in the lighting world from over forty years. Our history is the best guarantee of the high quality of PLG products.









# PLG s.r.l.

## Professional Lighting Genius

Nel 1980, abbiamo mosso i primi passi nella produzione di illuminazione ed effetti scenici per lo spettacolo emergendo fra i migliori produttori in Europa e nel mondo e distinguendoci per professionalità e competenza. Forti della nostra esperienza e dotati di naturale propensione verso l'innovazione e la ricerca, siamo stati una delle prime aziende a confrontarci con una tecnologia innovativa ed in continua evoluzione come il LED, affermandoci anche in ambito architettuale, residenziale, industriale e paesaggistico.

Negli ultimi anni abbiamo fornito la giusta luce anche a settori meno coperti dal mercato, illuminando e valorizzando, oltre ad uffici e abitazioni, arte sacra, gioiellerie, musei, negozi di alta moda, piscine e fontane. Dal nostro lavoro nasce una gamma sempre più completa di soluzioni illuminotecniche che si integrano perfettamente nei contesti più differenti della nostra quotidianità.

Usiamo i materiali migliori e le tecnologie più avanzate per ridisegnare gli spazi con la luce, dare nuove forme e sfumature agli edifici creando ambienti suggestivi e scenografici.

In 1980, we moved our first steps producing lighting and scenic effects for show business, emerging among the best producers in Europe and in the world, distinguishing us for professionalism and competence. Thanks to our experience and our natural inclination towards innovation and research, we were among the first companies to use an innovative and evolving technology as the LED, establishing ourselves in the architectural, residential, industrial and landscape field.

In the last years we gave light even to those branches less covered by the market, lighting and giving value to sacred art, to jewelleries and museums' showcases and displays, to haute couture shops and to fountains and pools. From our passionate care an extended and always more complete range of extraordinary lighting solutions, both from functional and aesthetic point of view, was born; they integrate seamlessly in the most different contexts of our daily lives.

We use the best materials and the most advanced technologies to restyle spaces with light, we give new shape and shades to buildings creating suggestive and scenographic spaces.





Un valore importante a cui non vogliamo rinunciare è quello del MADE IN ITALY.

La nostra azienda non prescinde dal nostro territorio, costante ispirazione per la creazione di apparecchi dal design innovativo.

La progettazione e l'intero ciclo produttivo avvengono interamente in Italia nella nostra sede di Toritto.

Siamo attenti ai particolari: selezioniamo con cura i migliori materiali sul mercato. Non solo LED ad altissima potenza e resa cromatica ma anche alluminio e acciaio inox di comprovata qualità, rigorosamente AISI 316L.

Riserviamo grande attenzione alla qualità della materia prima dei componenti e alle loro caratteristiche tecniche per avere la certezza che, nel tempo, i nostri prodotti mantengano inalterati l'aspetto e le loro proprietà illuminotecniche.

L'estrema cura nella realizzazione degli apparecchi PLG garantisce sicurezza, efficacia e resistenza, anche nelle situazioni più estreme.

An important value we do not want to give up: MADE IN ITALY.

Our company is part of a more complex and larger reality to which we are strongly linked: our territory, constant inspiration in creating products with an attractive and innovative design.

The design and the entire production cycle take place in ITALY in our company in Toritto.

We pay attention to details: we carefully select the best materials on the market. Not only the best high power and colour rendering LEDs but also the best aluminium and stainless steel, strictly AISI 316L.


We pay great attention to the quality of raw material, to components and their technical characteristics to be sure that our products maintain their appearance and their lighting properties over time.

The extreme care in the construction of PLG devices makes us synonym of security, efficacy and resistance, even in the most extreme situations.



## La giusta luce per ogni esigenza

Siamo in grado di rispondere positivamente ad ogni esigenza del cliente, di trovare soluzioni ottimali realizzando prodotti anche su misura, che rispondano al meglio alle diverse esigenze di illuminazione. Il nostro team di esperti è sempre a disposizione ed è in grado di fornire un supporto attento e continuo, dalla progettazione all'assistenza post-vendita.

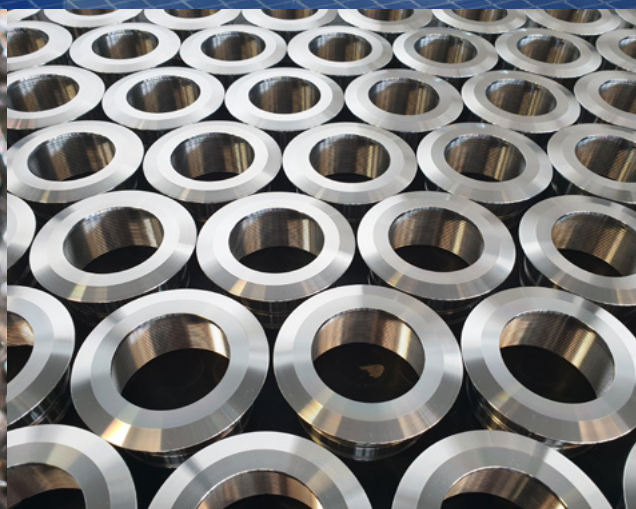








The design and the entire production cycle take place in ITALY in our company.

### The right light for every need

In PLG every project counts. Our company gives the right value to every type of request, on-site production allows us to be flexible and to find optimal solutions also creating specific and unique products that best meet different lighting needs. Our team of experts is always available and able to provide attentive and continuous support from design to after sales assistance.

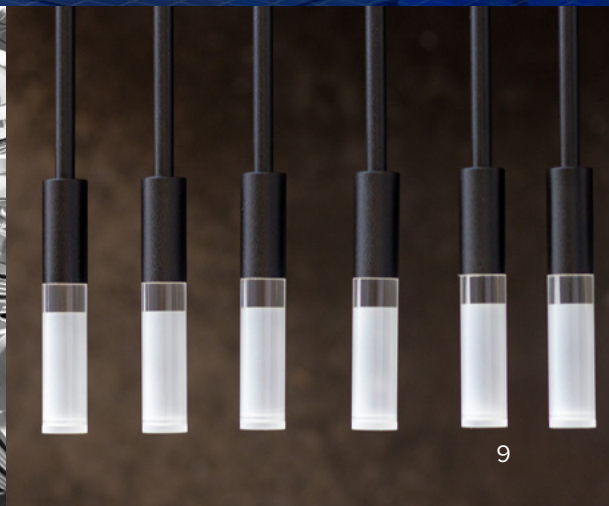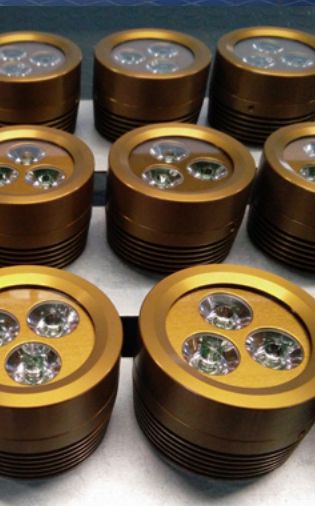



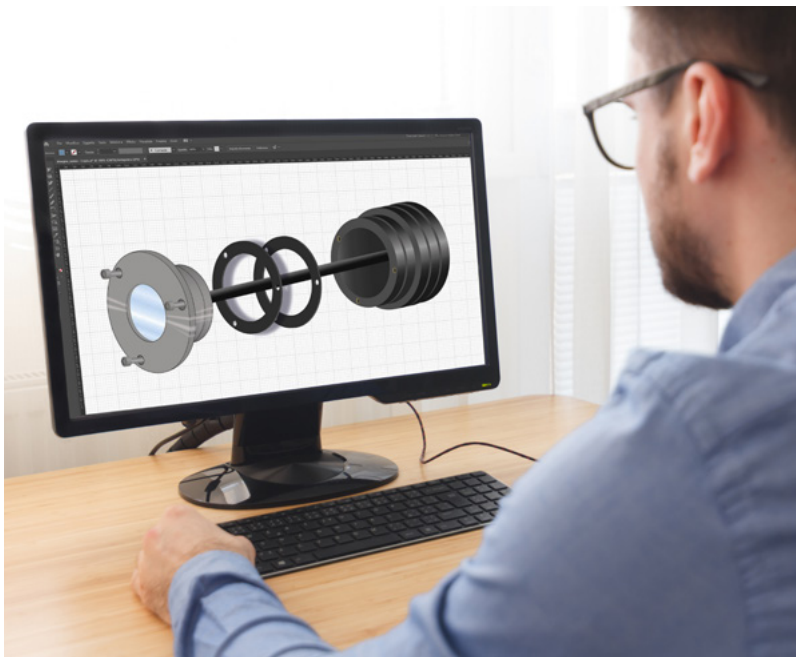

## Dalla progettazione

Una componente fondamentale alla base del nostro lavoro è un'attenta ricerca elettronica, ottica e meccanica. La progettazione di ogni prodotto parte da un preciso studio della luce e del suo scopo. Ottimizziamo così al meglio le performance e l'efficienza.

Progettiamo per soddisfare al meglio le esigenze dell'utente seguendo parametri di alta professionalità, design e tecnologia.

In accordo alla normativa EN 13032, nel nostro laboratorio illuminotecnico misuriamo e registriamo, attraverso un goniometro di alta precisione e affidabilità, la distribuzione dell'intensità luminosa di qualsiasi tipologia di apparecchio di illuminazione e di qualsiasi sorgente luminosa.



## Alla realizzazione

La lavorazione della materia prima, la progettazione tecnica, la produzione meccanica ed elettronica e l'intero processo di verniciatura (in polvere o liquida), dal lavaggio fino all'asciugatura in forno, sono interamente realizzate nella nostra sede con meticolosità e precisione.

Solo così possiamo gestire al meglio tempi e metodi di produzione e mantenere il controllo qualitativo di tutte le fasi della lavorazione garantendo standard elevati di qualità.

Prima di essere messo sul mercato, ogni prodotto a marchio PLG viene testato e sottoposto a rigorose valutazioni affinché la sorgente luminosa possa lavorare nelle migliori condizioni possibili e raggiungere l'eccellenza in termini di affidabilità, funzionalità e sicurezza.





## From design

In PLG we have only one goal: to create products of the highest quality levels, for this reason a careful research of electronic, optical and mechanic components is fundamental and is at the base of our work. The design of each product starts from a precise study of light and its purpose.

In this way we optimize performance and efficiency. We design our units to best meet the needs of our clients but also to work following high technological and design standards.

In accordance with EN 13032, in our lighting laboratory we measure and record, through a high precision and reliable goniophotometer, the distribution of light intensity of any type of lighting fixture and any light source.



## To realization

Processing of raw materials, technical design, mechanical and electronic production and the entire painting process (powder or liquid) from washing to drying in the oven, are entirely carried out in our premises with meticulousness and precision.

Only in this way we can better manage production times and methods and maintain quality control of all the production phases ensuring high standards of quality.


Before being put on the market, every PLG brand product is tested and submitted to rigorous assessments so that the light source can work in the best possible conditions and achieve excellence in terms of reliability, functionality and safety.









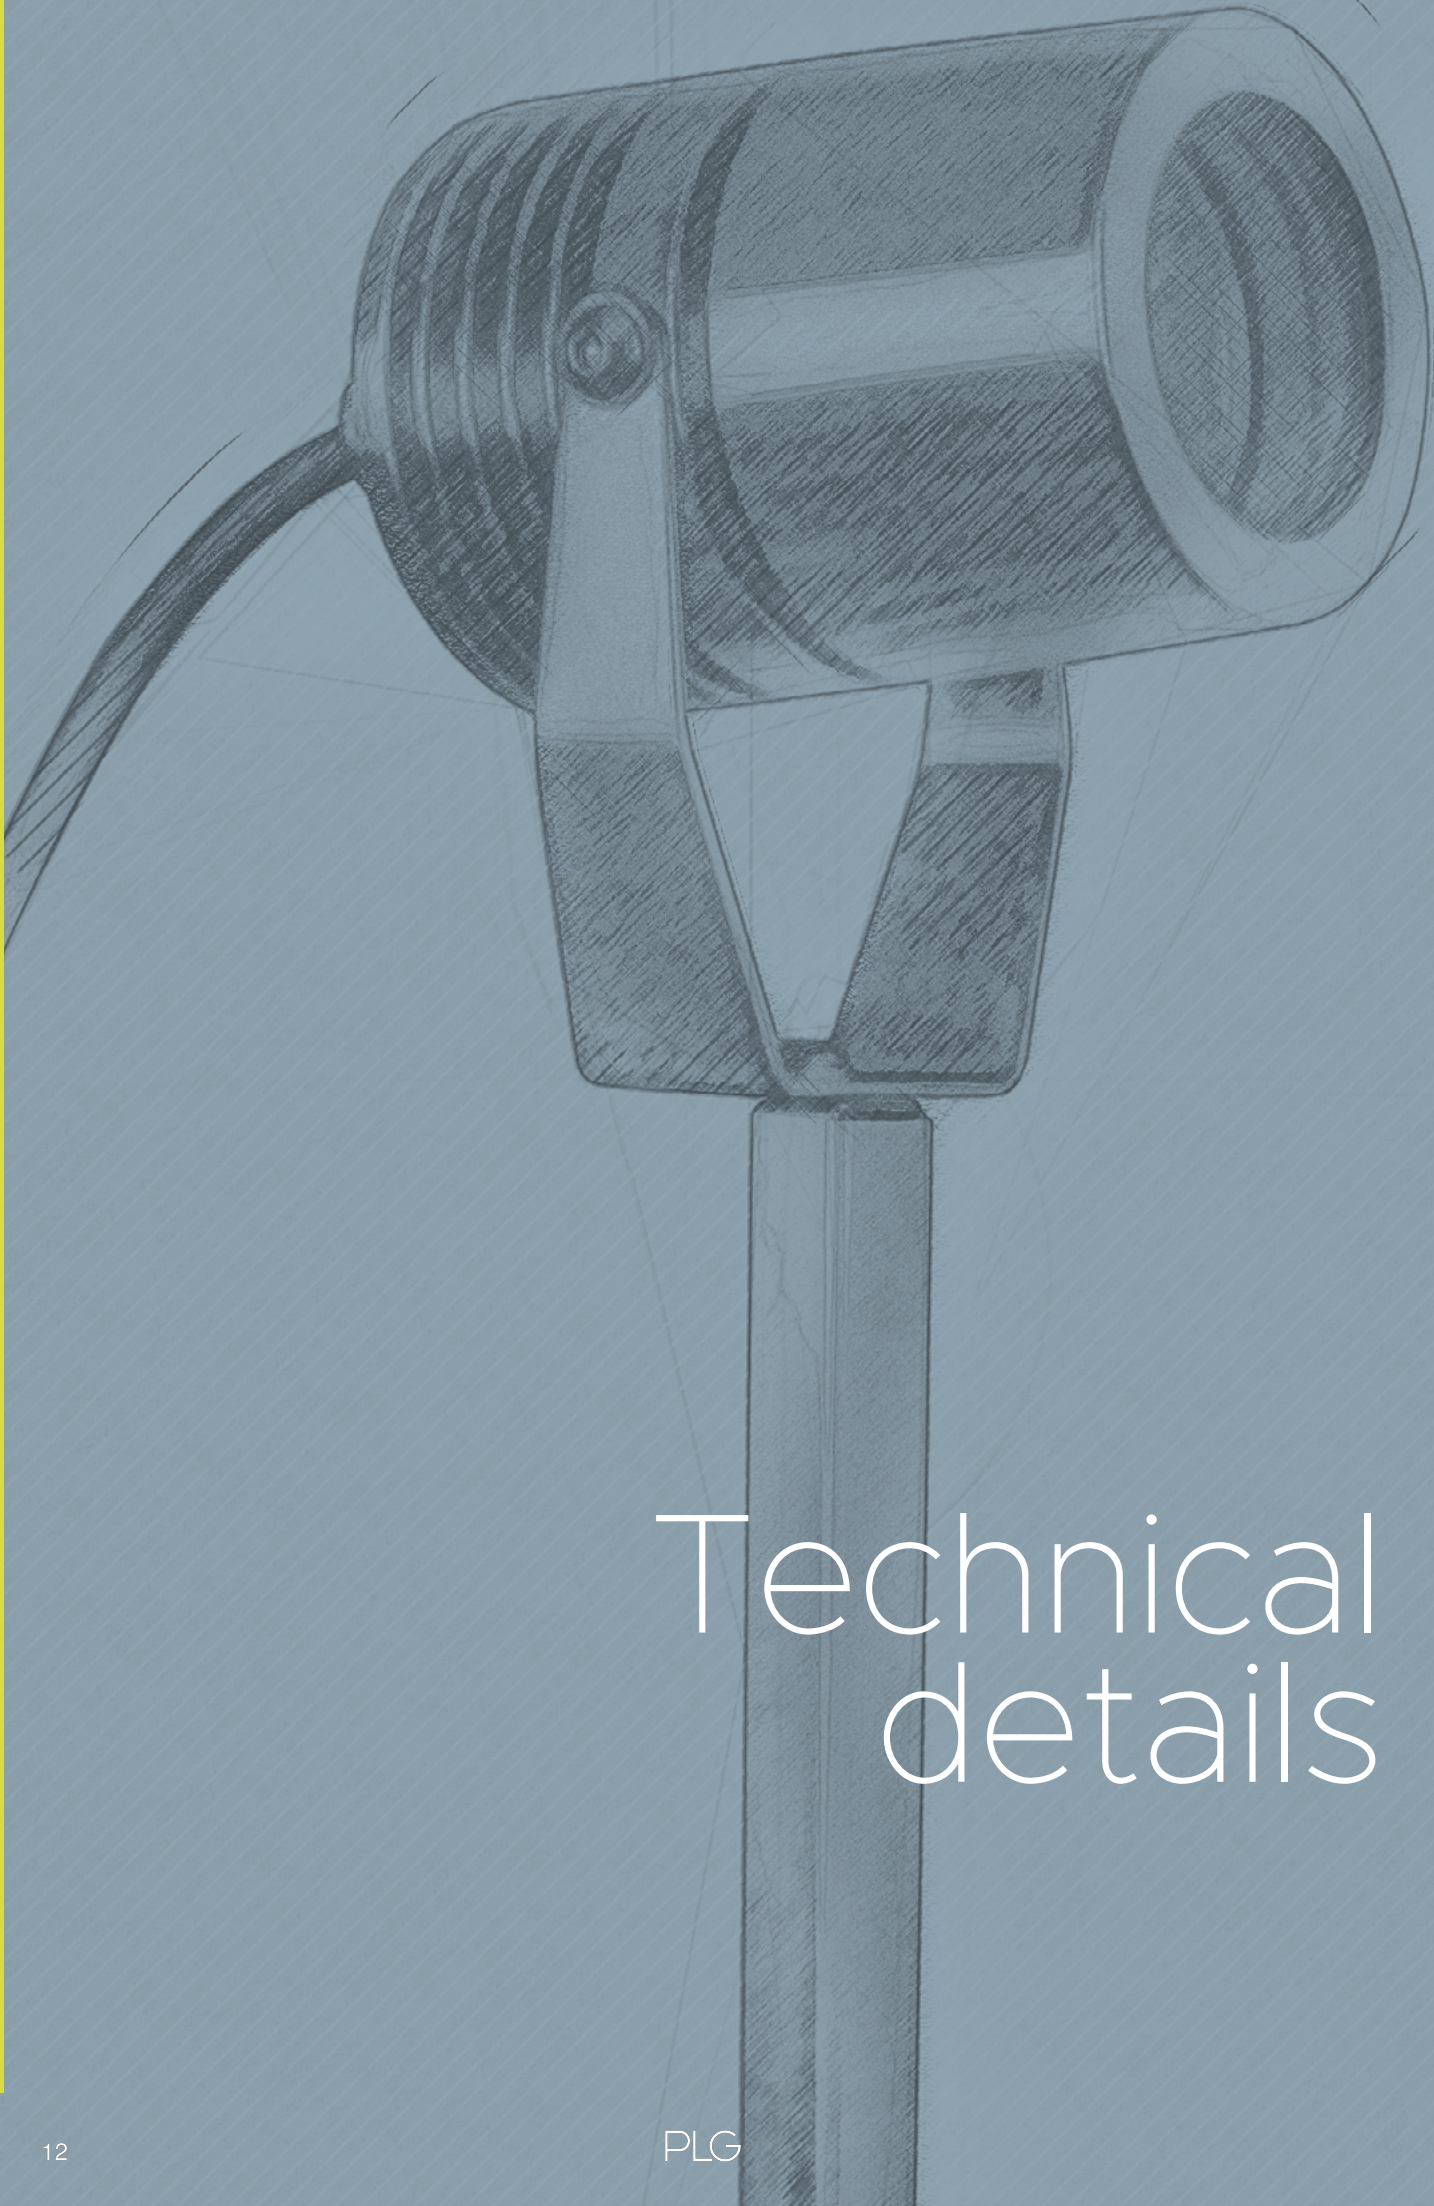












































La progettazione e l'intero ciclo produttivo avvengono interamente in sede e in Italia







# Technical details

	S= Very Narrow Beam		Ceiling, Wall, Bottom Up Track		Conform To European Union Norms
	N= Narrow Beam		Ceiling Recessed		Energy Label
	M= Medium Beam		Ceiling, Wall Recessed		Weight
	W= Wide Beam		Ceiling, Wall, Floor Recessed		gr.
	X= Very Wide Beam		Surface Floor Fixing		Flame Resistant
	T= Transparent Glass No optics		Zoom		Water Resistant
	D= Diffused Glass No optics		Different Optics Available		UV Resistant
	E= Elliptic Beam		Adjustable Beam		Solvent Resistant
	R= Diffused 360°		Antiglare System		Walk - Over
	A2= Wall Washer Beam - Ceiling		Dimmer		Drive - Over
	A2= Wall Washer Beam - Floor		Round Hole Dimension		RAL on Request
	L= Linear Beam	$\varnothing$ XX mm			Maximum Depth of Immersion - 3mt.
	A= Asymmetric Beam		Square Hole Dimension		Protection Against Solid Bodies with diameter larger than 12 mm No Protection Against Water
	Ceiling Surface		Magnetic Application		Protection Against Solid Bodies with diameter larger than 1 mm No Protection Against Water
	Ceiling, Wall Surface		Tear Resistant System		Total Protection Against Dust and Water Jet
	Ceiling, Wall, Bottom Up Surface		Class 1 Fitted With Earth Protection		Total Protection Against Dust and Temporary Immersion
	Ceiling, Wall Track		Class 2 No Connection To Electrical Earth		Total Protection Against Dust and Permanent Immersion
			Class 3 Low Voltage System		





PLG  s.r.l.

Professional Lighting Genius

16

- Recessed
- Appliques
- Paletti
- Linear lights
- Rotating lamps

- Pag. 20
- Pag. 34
- Pag. 40
- Pag. 54
- Pag. 60



JEWELLERY & MUSEUM

64

- Static recessed
- Backward optic recessed
- Trimless recessed
- Adjustable recessed
- Wall recessed
- Ceiling and wall surface
- Track lights
- Linear lights
- Projectors

- Pag. 70
- Pag. 78
- Pag. 82
- Pag. 92
- Pag. 100
- Pag. 104
- Pag. 114
- Pag. 128
- Pag. 134



INDOOR

136

- Spotlights
- Inox spotlights
- Architectural lights
- Floor recessed
- Grazing lights
- Ceiling recessed
- Wall recessed
- Wall surface
- Linear lights

- Pag. 144
- Pag. 172
- Pag. 182
- Pag. 186
- Pag. 212
- Pag. 218
- Pag. 232
- Pag. 248
- Pag. 250




OUTDOOR

256

- Garden lights

- Pag. 260



GARDEN

304

- Adjustable spotlights
- Static spotlights
- Recessed spotlights

- Pag. 308
- Pag. 312
- Pag. 316




UNDERWATER

320

- Drivers 250/350/500/700/1050/1200/1400 mA
- Drivers Multicurrent/Dimmable/24V
- Powerbox 1W/3W

- Pag. 320
- Pag. 326
- Pag. 328



CONTROLLERS





PLG presents an entire line of specific LED luminaires for the illumination of shop windows and showcases of jewellers, museums and shops. Spotlights with reduced dimensions but which still ensure the maximum luminous and energy efficiency. Luminaires designed for those seeking PLG light quality to give value to their products without sacrificing visual comfort and without the obstruction of an invasive light source.

# Jewellery & Museum

PLG presenta un'intera linea di apparecchi a LED specifici per l'illuminazione di vetrine e teche di gioiellerie, musei e negozi. Faretti dalle dimensioni ridotte ma che assicurano comunque la massima efficienza luminosa ed energetica.

Apparecchi studiati per chi cerca la qualità della luce PLG per valorizzare al meglio i propri prodotti senza rinunciare al comfort visivo e senza l'ingombro di una sorgente luminosa invadente.





Recessed  
Nike  
pag. 21



Recessed  
Pivot  
pag. 22



Recessed  
Pivot square  
pag. 22



Recessed  
Micro Fix  
pag. 23



Recessed  
Micro Fix square  
pag. 23



Recessed  
Twist  
pag. 24



Recessed  
Twist square  
pag. 24



Recessed  
Micro Fix 3  
pag. 25



Recessed  
Micro Fix 3 square  
pag. 25



Recessed  
Twist 3  
pag. 26



Recessed  
Twist 3 square  
pag. 26



Recessed  
Zenith  
pag. 27



Recessed  
Zenith 3  
pag. 27



Recessed  
Nano Comet  
pag. 28



Recessed  
Micro Comet  
pag. 29



Recessed  
Micro Comet 3  
pag. 30



Recessed  
Sirio r  
pag. 31



Recessed  
Pixye  
pag. 32



Recessed  
Pixye antiglare  
pag. 32



Recessed  
Pixye 16  
pag. 33



Appliques  
Lily  
pag. 35



Appliques  
Trixye  
pag. 36



Appliques  
Sirio  
pag. 37



Appliques  
Swivel  
pag. 38





Paletti  
Corner  
pag. 41



Paletti  
Glee  
pag. 42



Paletti  
Thin  
pag. 43



Paletti  
Sun  
pag. 44



Paletti  
Sun a  
pag. 45



Paletti  
Mini Joy  
pag. 46



Paletti  
Joy  
pag. 47



Paletti  
Joy 3  
pag. 48



Paletti  
Joy Zoom  
pag. 49



Paletti  
Sun c  
pag. 50



Paletti  
Bridge  
pag. 52 - 53



Linear Lights  
Delta 4  
pag. 55



Linear Lights  
Delta 9  
pag. 55




Linear Lights  
Linea 3 - Linea 6  
pag. 56



Linear Lights  
Linea 9 - Linea 15  
pag. 57



Linear Lights  
Linea a 3 - Linea a 6  
pag. 58



Linear Lights  
Linea a 9 - Linea a 15  
pag. 59



Rotating lamps  
Rotor Lamp 6  
pag. 61




Rotating lamps  
Rotor Lamp 12  
pag. 62





Rotating lamps  
Rotor Lamp 12 DW  
pag. 63

# Recessed

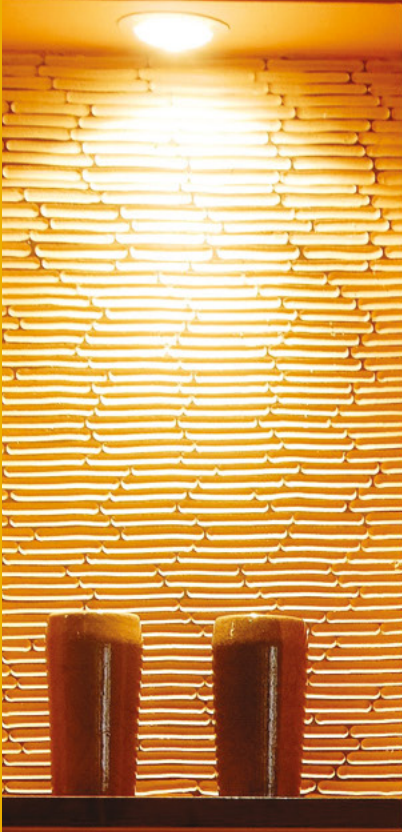



# Nike




 Ø 17mm



<b>POWER SUPPLY</b>	max 1W - max 350mA
<b>CODE</b>	NKM01 
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber
<b>OPTICS</b>	 M 20° W 35° X 50° E 20°x45° D Diff.
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 50°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium, flange in anodized or painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)
<b>NOTES</b>	other RAL on request

## Pivot




Ø 32mm

CE III 30gr IP40

A A+ A++

## Pivot square



Ø 32mm

CE III 30gr IP40



A A+ A++

<b>POWER SUPPLY</b>	max 3W - max 700mA												
<b>CODE</b>	PIV01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> </tr> </table>	M	W	X	E					20°	35°	50°	20°x45°
M	W	X	E										
20°	35°	50°	20°x45°										
<b>FINISHES</b>	G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)												
<b>DELIVERED LUMEN OUTPUT</b>	150lm (3000°K, 700mA, 50°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 324 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												

<b>POWER SUPPLY</b>	max 3W - max 700mA												
<b>CODE</b>	PIVS1 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> </tr> </table>	M	W	X	E					20°	35°	50°	20°x45°
M	W	X	E										
20°	35°	50°	20°x45°										
<b>FINISHES</b>	G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)												
<b>DELIVERED LUMEN OUTPUT</b>	150lm (3000°K, 700mA, 50°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 324 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												




## Micro Fix

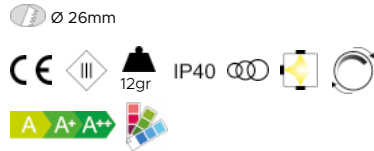


<b>POWER SUPPLY</b>	max 1W - max 350mA															
<b>CODE</b>	MFX01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>FINISHES</b>	W - White G - Grey B - Black															
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	110lm (3000°K, 350mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body in anodized aluminium, flange in anodized or painted aluminium															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)															
<b>NOTES</b>	other RAL on request															

## Micro Fix square



<b>POWER SUPPLY</b>	max 1W - max 350mA															
<b>CODE</b>	MFXS1 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>FINISHES</b>	W - White G - Grey B - Black															
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	110lm (3000°K, 350mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body in anodized aluminium, flange in anodized or painted aluminium															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)															
<b>NOTES</b>	other RAL on request															

# Twist




Ø 40mm

CE, III, 50gr, IP40, [LED], [RECESSED], [RECYCLED]

A A+ A++

<b>POWER SUPPLY</b>	max 3W - max 700mA															
<b>CODE</b>	TWT01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>FINISHES</b>	G - Grey B - Black															
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	175lm (3000°K, 700mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body and flange in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 324 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)															
<b>NOTES</b>	other finishes on request															

# Twist square





Ø 40mm

CE, III, 50gr, IP40, [LED], [RECESSED], [RECYCLED]

A A+ A++



<b>POWER SUPPLY</b>	max 3W - max 700mA															
<b>CODE</b>	TWS01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>FINISHES</b>	G - Grey B - Black															
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	175lm (3000°K, 700mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body and flange in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 324 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)															
<b>NOTES</b>	other finishes on request															

## Micro Fix 3

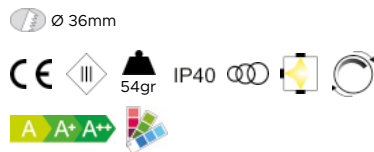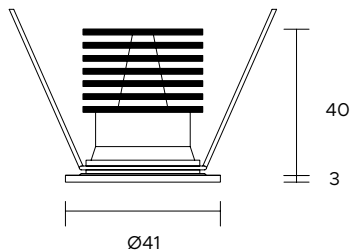


<b>POWER SUPPLY</b>	max 3W - max 350mA												
<b>CODE</b>	MFX03 ■■■ □												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table>	N	M	W	E					15°	25°	30°	40°x17°
N	M	W	E										
15°	25°	30°	40°x17°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in anodized or painted aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)												
<b>NOTES</b>	other RAL on request												

## Micro Fix 3 square

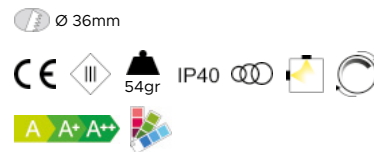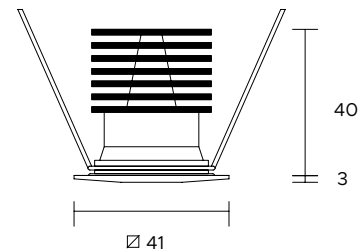

<b>POWER SUPPLY</b>	max 3W - max 350mA												
<b>CODE</b>	MFXS3 ■■■ □												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table>	N	M	W	E					15°	25°	30°	40°x17°
N	M	W	E										
15°	25°	30°	40°x17°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in anodized or painted aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)												
<b>NOTES</b>	other RAL on request												

# Twist 3




Ø 40mm

CE, III, 50gr, IP40, [LED], [RECESSED], [RECYCLED]

A+ A+ A+

<b>POWER SUPPLY</b>	max 3W - max 350mA												
<b>CODE</b>	TWT03 ■■■□												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40° x17°</td> </tr> </table>	N	M	W	E					15°	25°	30°	40° x17°
N	M	W	E										
15°	25°	30°	40° x17°										
<b>FINISHES</b>	G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												

# Twist 3 square



Ø 40mm



CE, III, 50gr, IP40, [LED], [RECESSED], [RECYCLED]

A+ A+ A+

<b>POWER SUPPLY</b>	max 3W - max 350mA												
<b>CODE</b>	TWS03 ■■■□												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40° x17°</td> </tr> </table>	N	M	W	E					15°	25°	30°	40° x17°
N	M	W	E										
15°	25°	30°	40° x17°										
<b>FINISHES</b>	G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												




# Zenith

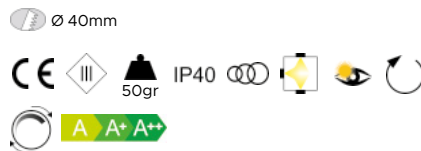


<b>POWER SUPPLY</b>	max 3W - max 700mA															
<b>CODE</b>	ZNT01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>FINISHES</b>	G - Grey B - Black															
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	175lm (3000°K, 700mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body and flange in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 324 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)															
<b>NOTES</b>	other finishes on request															

# Zenith 3



<b>POWER SUPPLY</b>	max 3W - max 350mA												
<b>CODE</b>	ZNT03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table>	N	M	W	E					10°	25°	30°	40°x17°
N	M	W	E										
10°	25°	30°	40°x17°										
<b>FINISHES</b>	G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												

# Nano Comet




Ø 17mm



<b>POWER SUPPLY</b>	max 1W - max 350mA												
<b>CODE</b>	NCT01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: grey;">■</span> <span style="color: black;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> </tr> </table>	M	W	X	E					20°	35°	50°	20°x45°
M	W	X	E										
20°	35°	50°	20°x45°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 50°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall)												
<b>NOTES</b>	other RAL on request												

# Micro Comet




Ø 37mm



<b>POWER SUPPLY</b>	max 3W - max 700mA															
<b>CODE</b>	MCT01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>FINISHES</b>	W - White G - Grey B - Black															
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	175lm (3000°K, 700mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium															
<b>DRIVER</b>	not included, see pag. 324 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall)															
<b>NOTES</b>	other RAL on request															

# Micro Comet 3

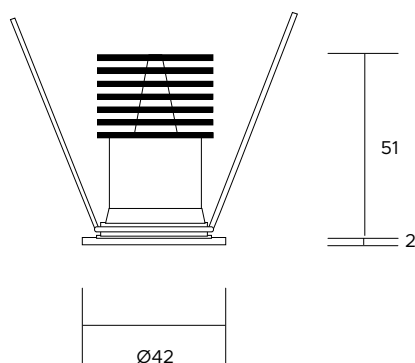


Ø 37mm



<b>POWER SUPPLY</b>	max 3W - max 350mA												
<b>CODE</b>	MCT03 ■■■												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table>	N	M	W	E					15°	25°	30°	40°x17°
N	M	W	E										
15°	25°	30°	40°x17°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall)												
<b>NOTES</b>	other RAL on request												

# Sirio r





<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	SRR01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	S 3°
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 3°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Liyy 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling)
<b>NOTES</b>	other RAL on request

<b>POWER SUPPLY</b>	max 6W - max 700mA
<b>CODE</b>	SRR02 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N M W 15° 25° 40°
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten
<b>LUMEN OUTPUT SOURCE</b>	800lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	430lm (3000°K, 700mA, 25°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Liyy 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling)
<b>NOTES</b>	other RAL on request

# Pixye

# Pixye antiglare

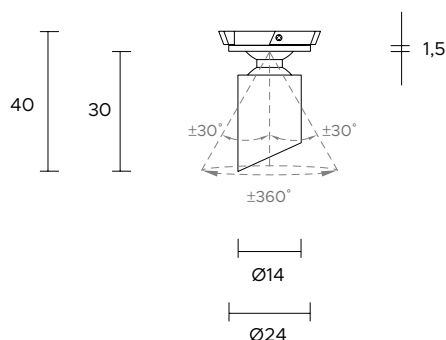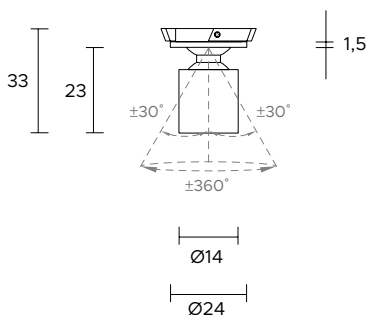


Ø 20mm  
 IP40

Ø 20mm  
 IP40

<b>POWER SUPPLY</b>	max 1W - max 350mA												
<b>CODE</b>	PXY01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> </tr> </table>	M	W	X	E					20°	35°	50°	20°x45°
M	W	X	E										
20°	35°	50°	20°x45°										
<b>FINISHES</b>	G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 50°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												

<b>POWER SUPPLY</b>	max 1W - max 350mA												
<b>CODE</b>	PXA01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> </tr> </table>	M	W	X	E					20°	35°	50°	20°x45°
M	W	X	E										
20°	35°	50°	20°x45°										
<b>FINISHES</b>	G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 50°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												

# Pixye 16



Ø 20mm




<b>POWER SUPPLY</b>	max 1W - max 350mA															
<b>CODE</b>	PXY16 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>25°x45°</td> </tr> </table>	N	M	W	X	E						15°	25°	40°	60°	25°x45°
N	M	W	X	E												
15°	25°	40°	60°	25°x45°												
<b>FINISHES</b>	G - Grey B - Black															
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	110lm (3000°K, 350mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body and flange in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall, bottom up)															
<b>NOTES</b>	other finishes on request															

# Appliques






# Lily

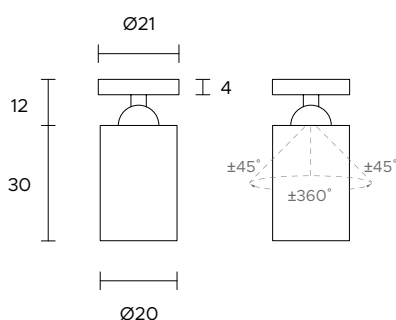

<b>POWER SUPPLY</b>	max 2W - max 500mA															
<b>CODE</b>	LYL01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: blue;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>25°x45°</td> </tr> </table>	N	M	W	X	E						15°	25°	40°	60°	25°x45°
N	M	W	X	E												
15°	25°	40°	60°	25°x45°												
<b>FINISHES</b>	G - Grey B - Black															
<b>FIXING OPTIONS</b>	1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic															
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	145lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body and flange in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed or surface (ceiling, wall, bottom up)															
<b>NOTES</b>	other finishes on request															

# Trixye

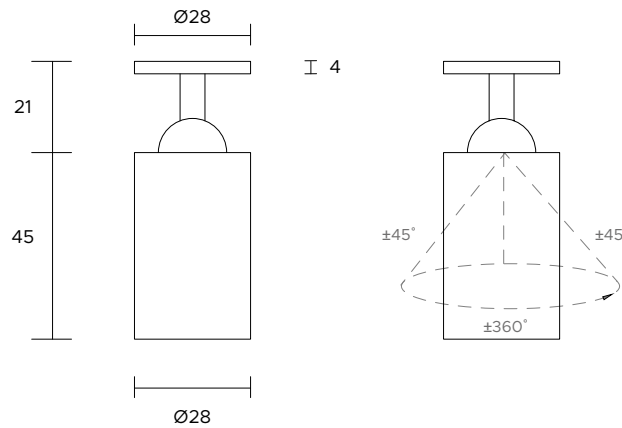

1 - Applique



2 - Springs



3 - Ring Nut





4 - Magnetic



<b>POWER SUPPLY CODE</b>	max 3W - max 350mA TXY03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: blue;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table>	N	M	W	E					15°	25°	30°	40°x17°
N	M	W	E										
15°	25°	30°	40°x17°										
<b>FINISHES</b>	G - Grey B - Black												
<b>FIXING OPTIONS</b>	1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP cable 2 x 0,35												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed or surface (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												


# Sirio

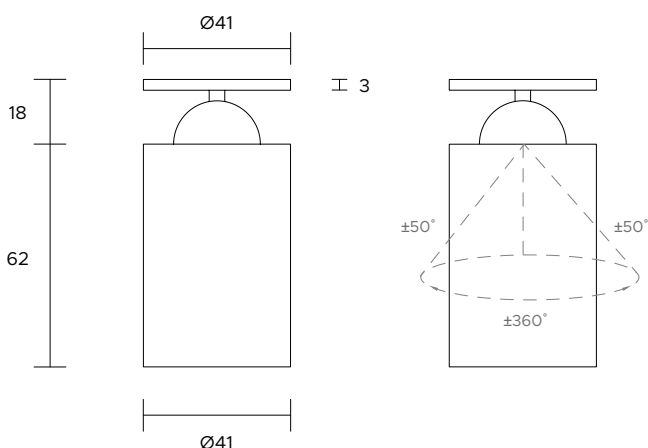

<b>POWER SUPPLY CODE</b>	max 3W - max 700mA SRO01
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	S 3°
<b>FINISHES</b>	G - Grey B - Black
<b>FIXING OPTIONS</b>	1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 3°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed or surface (ceiling, wall, bottom up)
<b>NOTES</b>	other finishes on request

<b>POWER SUPPLY CODE</b>	max 6W - max 700mA SRO02
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N M W 15° 25° 40°
<b>FINISHES</b>	G - Grey B - Black
<b>FIXING OPTIONS</b>	1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic
<b>LUMEN OUTPUT SOURCE</b>	800lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	430lm (3000°K, 700mA, 25°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed or surface (ceiling, wall, bottom up)
<b>NOTES</b>	other finishes on request

# Swivel

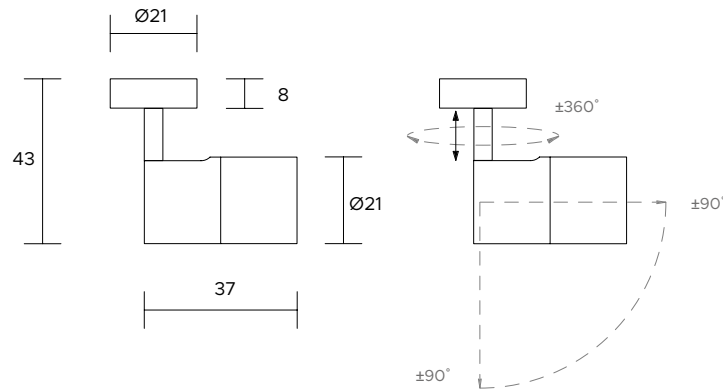

<b>POWER SUPPLY CODE</b>	max 2W - max 500mA SW001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: blue;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>25°x45°</td> </tr> </table>	N	M	W	X	E						15°	25°	40°	60°	25°x45°
N	M	W	X	E												
15°	25°	40°	60°	25°x45°												
<b>FINISHES</b>	G - Grey B - Black															
<b>FIXING OPTIONS</b>	1 - Applique 2 - Springs 3 - Ring Nut 4 - Magnetic															
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	145lm (3000°K, 500mA , 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body and flange in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed or surface (ceiling, wall, bottom up)															
<b>NOTES</b>	other finishes on request															






PLG



Paletti

# Corner

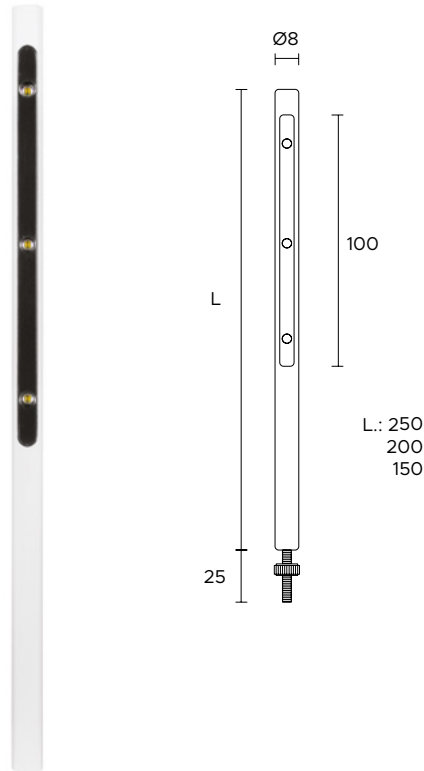

Ø 5mm




<b>POWER SUPPLY</b>	max 3W - max 350mA
<b>CODE</b>	CRN03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: pink;">■</span> <span style="color: blue;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber
<b>OPTICS</b>	E  90°x120°
<b>FINISHES</b>	W - White G - Grey B - Black
<b>STEM LENGHT</b>	1 - 150mm 2 - 200mm 3 - 250mm
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	180lm (3000°K, 350mA, 90°x120°)
<b>LED NUMBER</b>	3 power LEDs
<b>MATERIAL</b>	body in anodized or painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)
<b>ACCESSORIES</b>	Fixing washer Ø15x2,5 code: RND01
<b>NOTES</b>	other RAL on request






## Glee

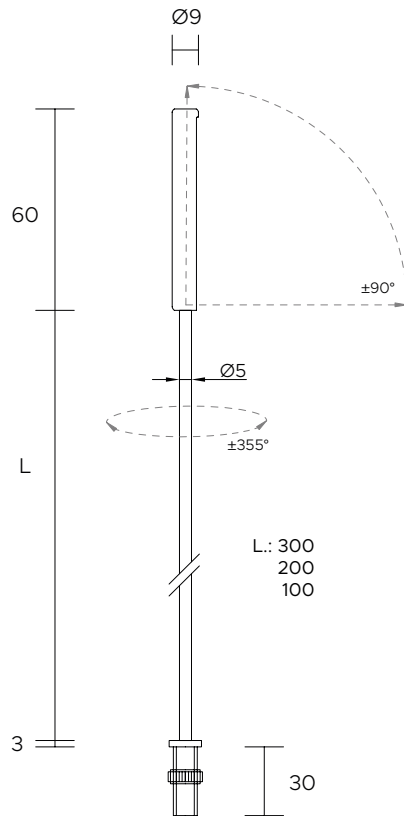


Ø 10mm




<b>POWER SUPPLY</b>	max 3W - max 250mA
<b>CODE</b>	GLE03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: pink;">■</span> <span style="color: purple;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber
<b>OPTICS</b>	 110°
<b>FINISHES</b>	G - Grey B - Black
<b>STEM LENGHT</b>	1 - 100mm 2 - 200mm 3 - 300mm
<b>LUMEN OUTPUT SOURCE</b>	240lm (3000°K, 250mA)
<b>DELIVERED LUMEN OUTPUT</b>	180lm (3000°K, 250mA, 110°)
<b>LED NUMBER</b>	3 power LEDs
<b>MATERIAL</b>	body and stem in anodized aluminium
<b>DRIVER</b>	not included, see pag. 321 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)
<b>NOTES</b>	other finishes on request

# Thin

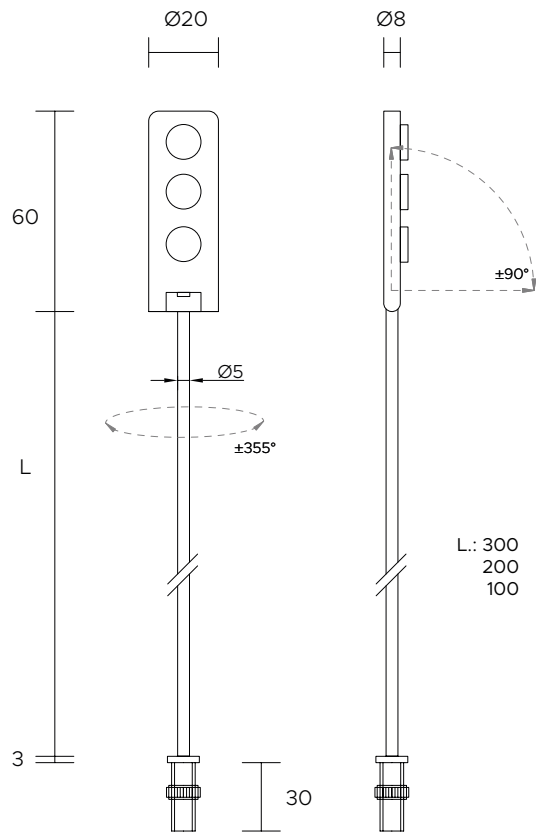


Ø 10mm



<b>POWER SUPPLY</b>	max 3W - max 350mA												
<b>CODE</b>	THP03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> </tr> </table>	M	W	X	E					20°	35°	50°	20°x45°
M	W	X	E										
20°	35°	50°	20°x45°										
<b>FINISHES</b>	G - Grey B - Black												
<b>STEM LENGHT</b>	1 - 100mm 2 - 200mm 3 - 300mm												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	280lm (3000°K, 350mA, 50°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body and stem in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												

# Sun



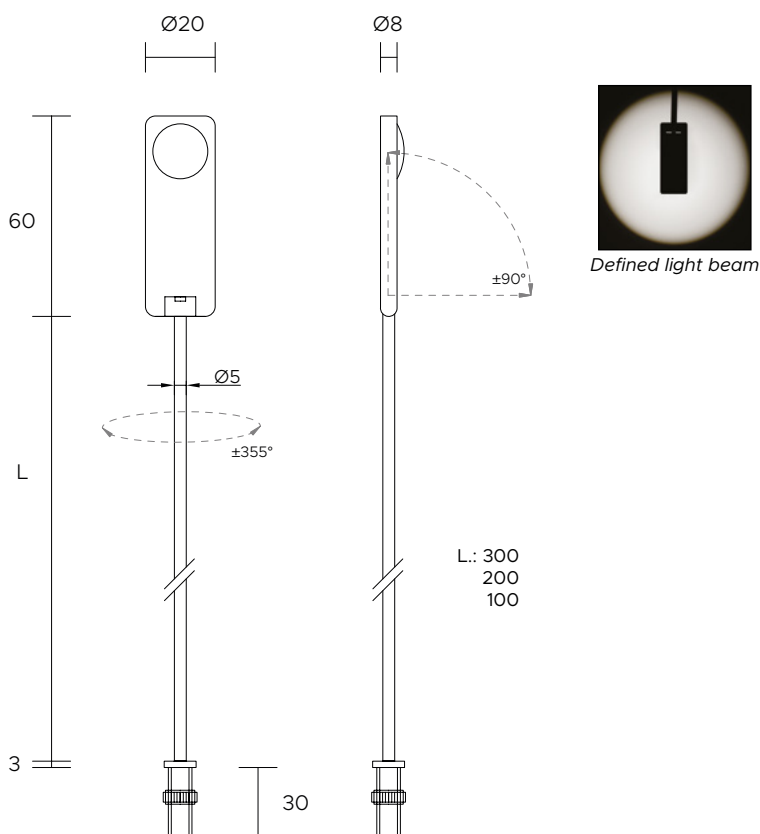


Ø 10mm



<b>POWER SUPPLY</b>	max 4W - max 350mA
<b>CODE</b>	SE001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: pink;">■</span> <span style="color: purple;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	 x 70°
<b>FINISHES</b>	G - Grey B - Black
<b>STEM LENGHT</b>	1 - 100mm 2 - 200mm 3 - 300mm
<b>LUMEN OUTPUT SOURCE</b>	400lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	300lm (3000°K, 350mA, 70°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and stem in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)
<b>NOTES</b>	other finishes on request


# Sun a

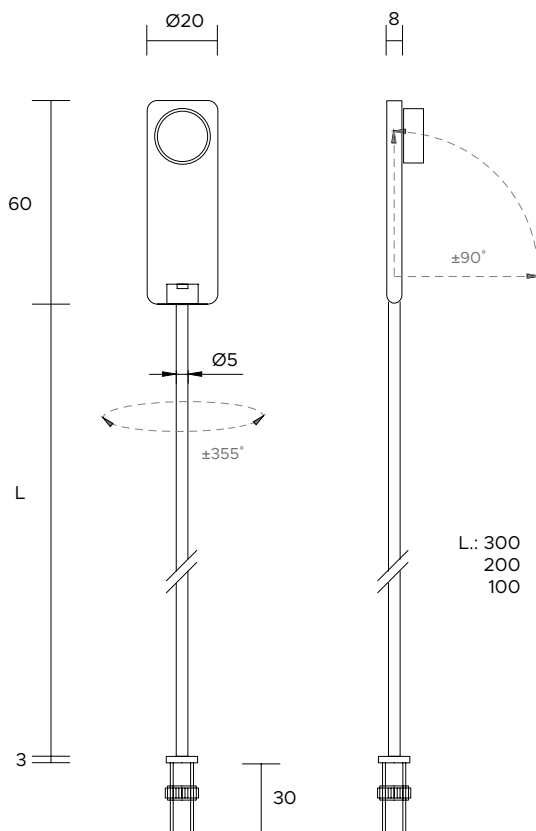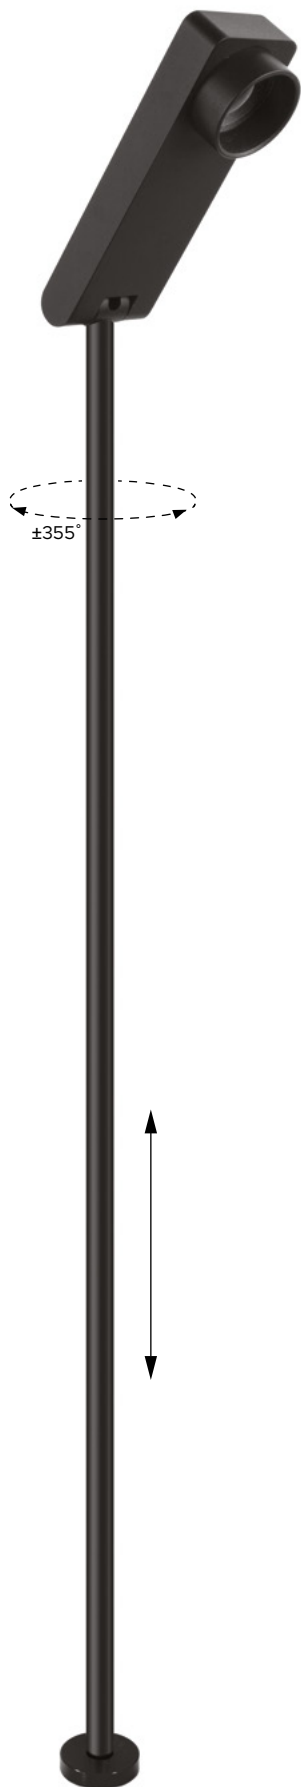


Defined light beam

Ø 10mm



<b>POWER SUPPLY</b>	max 4W - max 350mA
<b>CODE</b>	SEO02 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: pink;">■</span> <span style="color: grey;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	X  60°
<b>FINISHES</b>	G - Grey B - Black
<b>STEM LENGHT</b>	1 - 100mm 2 - 200mm 3 - 300mm
<b>LUMEN OUTPUT SOURCE</b>	400lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	220lm (3000°K, 350mA, 60°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and stem in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)
<b>NOTES</b>	other finishes on request

## Mini Joy

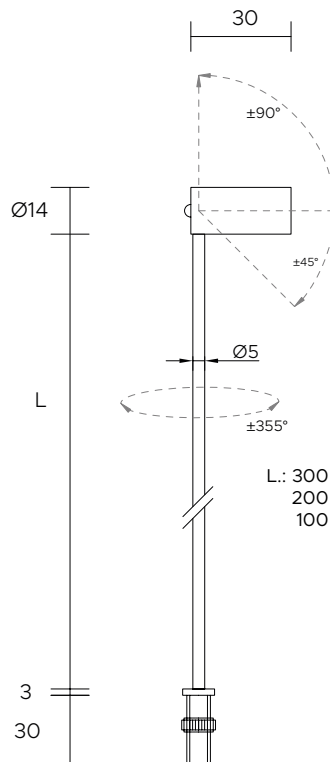


Ø 10mm



<b>POWER SUPPLY</b>	max 2W - max 500mA												
<b>CODE</b>	MJY01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> </tr> </table>					M	W	X	E	20°	35°	50°	20°x45°
M	W	X	E										
20°	35°	50°	20°x45°										
<b>FINISHES</b>	G - Grey B - Black												
<b>STEM LENGHT</b>	1 - 100mm 2 - 200mm 3 - 300mm												
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	140lm (3000°K, 500mA, 50°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	body and stem in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												

# Joy

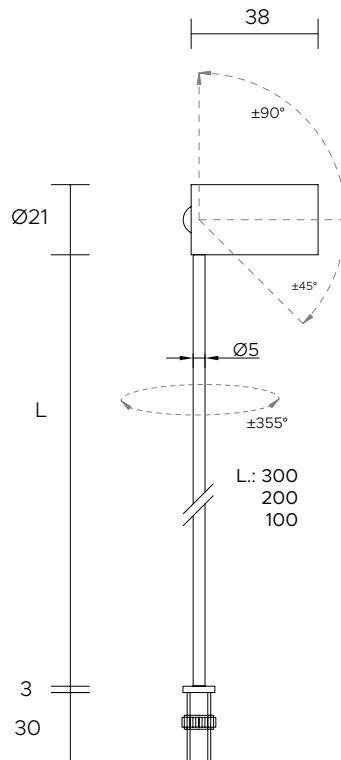


Ø 10mm



<b>POWER SUPPLY</b>	max 2W - max 500mA															
<b>CODE</b>	JOY01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>25° x 45°</td> </tr> </table>	N	M	W	X	E						15°	25°	40°	60°	25° x 45°
N	M	W	X	E												
15°	25°	40°	60°	25° x 45°												
<b>FINISHES</b>	G - Grey B - Black															
<b>STEM LENGHT</b>	1 - 100mm 2 - 200mm 3 - 300mm															
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	145lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	body and stem in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)															
<b>NOTES</b>	other finishes on request															

## Joy 3

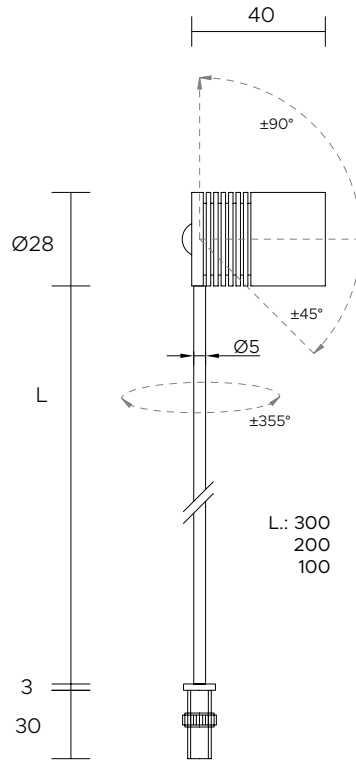


Ø 10mm



<b>POWER SUPPLY</b>	max 3W - max 350mA												
<b>CODE</b>	JOY03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: pink;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </table>	N	M	W	E					15°	25°	30°	40°x17°
N	M	W	E										
15°	25°	30°	40°x17°										
<b>FINISHES</b>	G - Grey B - Black												
<b>STEM LENGHT</b>	1 - 100mm 2 - 200mm 3 - 300mm												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body and stem in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)												
<b>NOTES</b>	other finishes on request												



# Joy Zoom

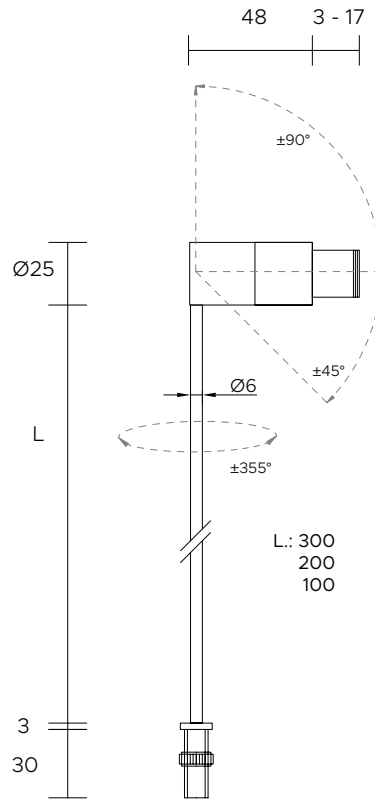


Joy Zoom optic is focusable from 8° to 45°

Ø 12mm




<b>POWER SUPPLY</b>	max 4W - max 350mA
<b>CODE</b>	JOZ01 <span style="color: green;">■</span> <span style="color: blue;">■</span> <span style="color: red;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	8° > 45°
<b>FINISHES</b>	B - Black
<b>STEM LENGHT</b>	1 - 100mm 2 - 200mm 3 - 300mm
<b>LUMEN OUTPUT SOURCE</b>	400lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	300lm (3000°K, 350mA)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and stem in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)
<b>NOTES</b>	other finishes on request

## Sun c

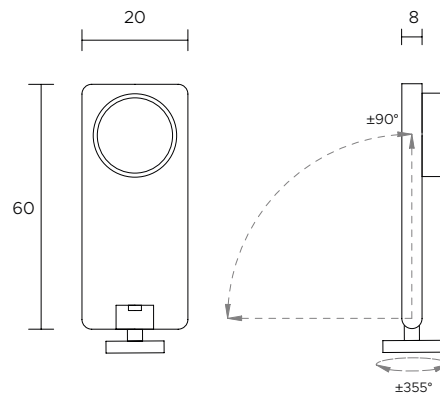


Ø 10mm



<b>POWER SUPPLY</b>	max 4W - max 350mA
<b>CODE</b>	SNC01 ■■■
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	X  60°
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	400lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	220lm (3000°K, 350mA, 60°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, bottom up)
<b>NOTES</b>	other finishes on request



## Bridge

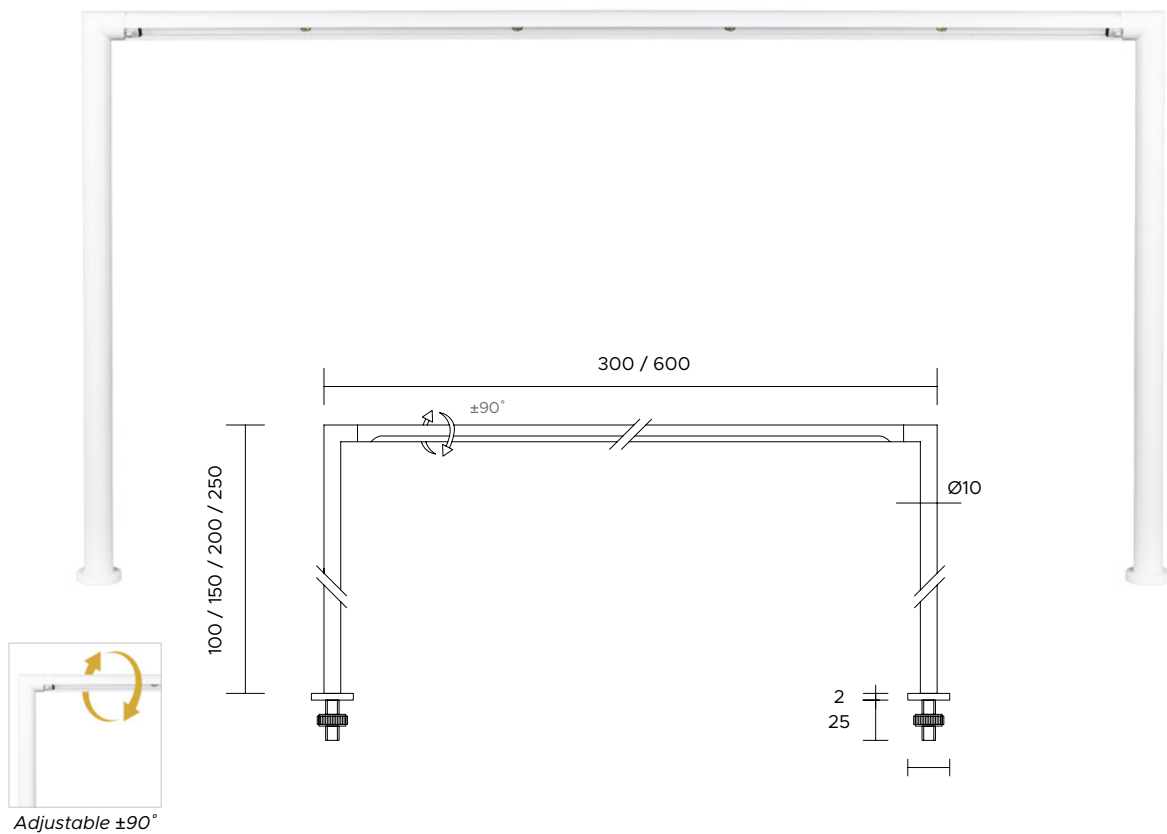

Ø 9mm



<b>POWER SUPPLY</b>	max 4W - max 350mA
<b>CODE</b>	BRD01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K

<b>OPTICS</b>	110°
---------------	------

<b>FINISHES</b>	w - White G - Grey B - Black
-----------------	------------------------------------

<b>STEM LENGHT</b>	1 - 100mm 2 - 150mm 3 - 200mm 4 - 250mm
--------------------	--

<b>LUMEN OUTPUT SOURCE</b>	440lm (3000°K, 350mA)
----------------------------	-----------------------

<b>DELIVERED LUMEN OUTPUT</b>	410lm (3000°K, 350mA, 110°)
-------------------------------	-----------------------------

<b>LED NUMBER</b>	4 power LEDs
-------------------	--------------

<b>MATERIAL</b>	body in painted aluminium
-----------------	---------------------------

<b>DRIVER</b>	not included, see pag. 322 and 326
---------------	------------------------------------

<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
--------------------	------------------------------------

<b>WIRING</b>	in series
---------------	-----------

<b>MOUNTING</b>	surface (floor fixing)
-----------------	------------------------

<b>NOTES</b>	other RAL on request, customizable sizes on request
--------------	--



<b>POWER SUPPLY</b>	max 8W - max 350mA
<b>CODE</b>	BRD02 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K

<b>OPTICS</b>	110°
---------------	------

<b>FINISHES</b>	w - White G - Grey B - Black
-----------------	------------------------------------

<b>STEM LENGHT</b>	1 - 100mm 2 - 150mm 3 - 200mm 4 - 250mm
--------------------	--

<b>LUMEN OUTPUT SOURCE</b>	880lm (3000°K, 350mA)
----------------------------	-----------------------

<b>DELIVERED LUMEN OUTPUT</b>	820lm (3000°K, 350mA, 110°)
-------------------------------	-----------------------------

<b>LED NUMBER</b>	8 power LEDs
-------------------	--------------

<b>MATERIAL</b>	body in painted aluminium
-----------------	---------------------------

<b>DRIVER</b>	not included, see pag. 322 and 326
---------------	------------------------------------

<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
--------------------	------------------------------------


<b>WIRING</b>	in series
---------------	-----------

<b>MOUNTING</b>	surface (floor fixing)
-----------------	------------------------

<b>NOTES</b>	other RAL on request, customizable sizes on request
--------------	--



# Bridge

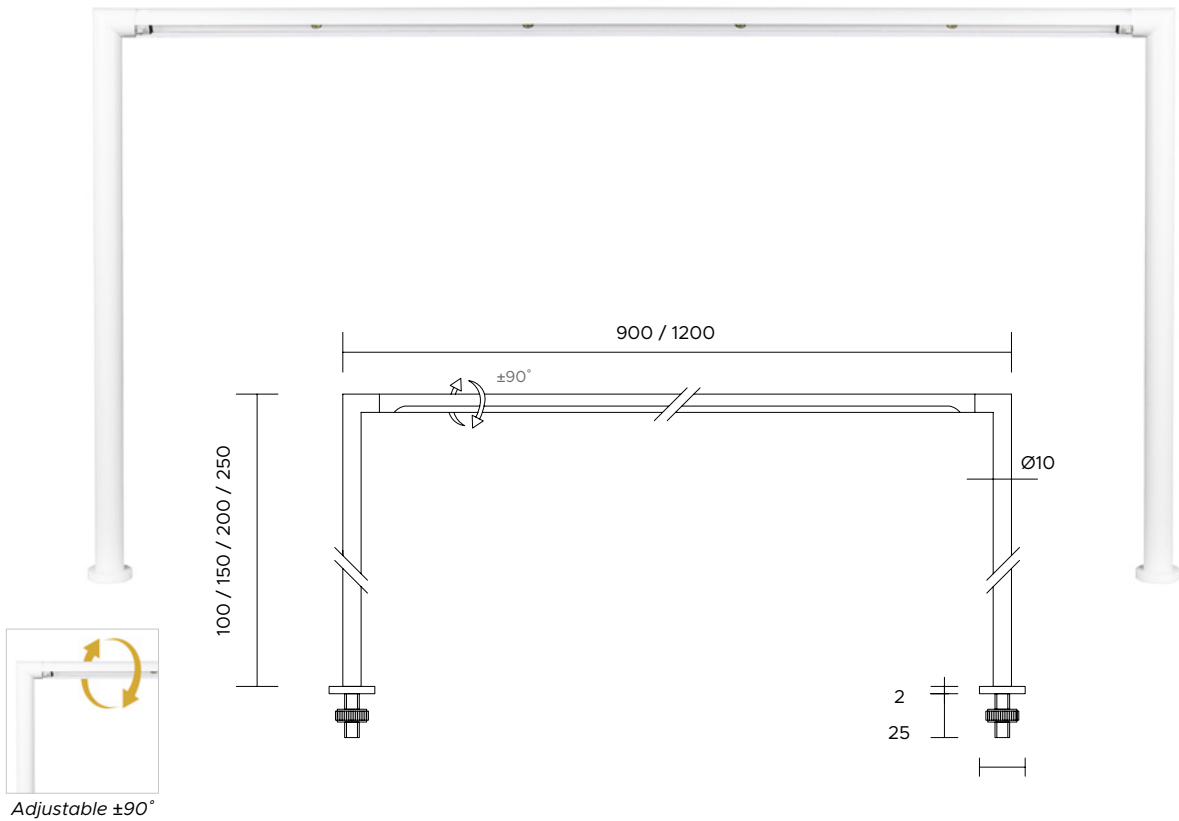


Ø9 mm






<b>POWER SUPPLY</b>	max 12W - max 350mA
<b>CODE</b>	BRD03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	110°
<b>FINISHES</b>	w - White G - Grey B - Black
<b>STEM LENGHT</b>	1 - 100mm 2 - 150mm 3 - 200mm 4 - 250mm
<b>LUMEN OUTPUT SOURCE</b>	1320lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	1230lm (3000°K, 350mA, 110°)
<b>LED NUMBER</b>	12 power LEDs
<b>MATERIAL</b>	body in painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (floor fixing)
<b>NOTES</b>	other RAL on request, customizable sizes on request

<b>POWER SUPPLY</b>	max 16W - max 350mA
<b>CODE</b>	BRD04 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	110°
<b>FINISHES</b>	w - White G - Grey B - Black
<b>STEM LENGHT</b>	1 - 100mm 2 - 150mm 3 - 200mm 4 - 250mm
<b>LUMEN OUTPUT SOURCE</b>	1760lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	1640lm (3000°K, 350mA, 110°)
<b>LED NUMBER</b>	16 power LEDs
<b>MATERIAL</b>	body in painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (floor fixing)
<b>NOTES</b>	other RAL on request, customizable sizes on request




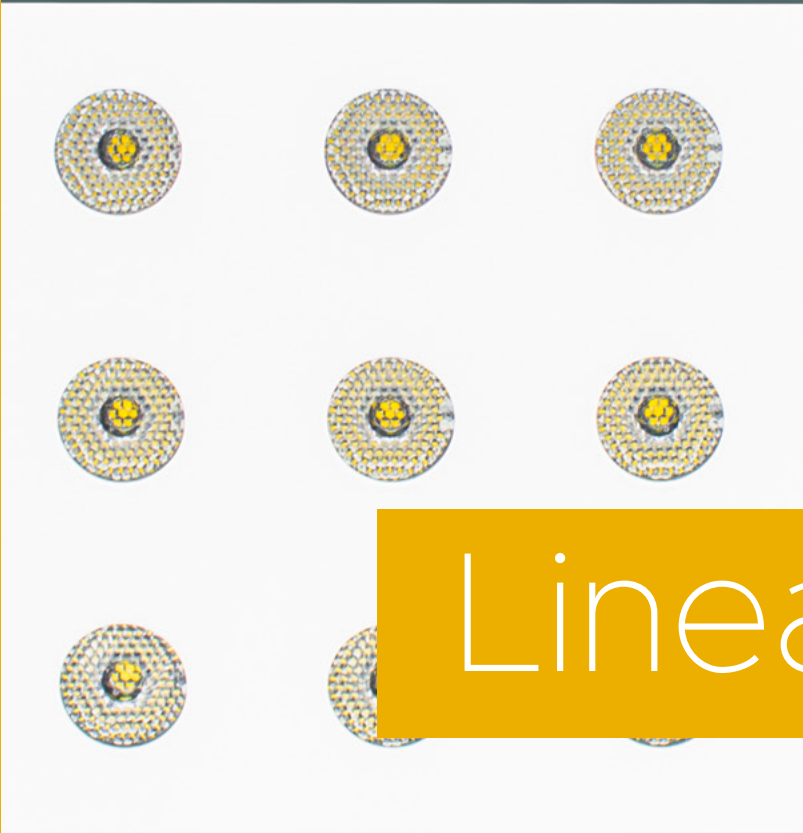


# Linear lights

## Delta 4

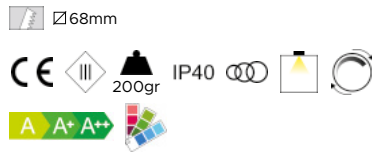

## Delta 9

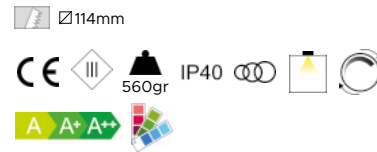
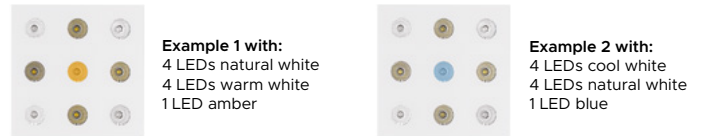




<b>POWER SUPPLY</b>	max 8W - max 500mA
<b>CODE</b>	DLT04 ■■■□
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber B - Blue
<b>OPTICS</b>	N 10° M 25° W 40° X 60°
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	600lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	590lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	4 power LEDs
<b>MATERIAL</b>	body in anodized aluminium, cover in painted aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling)
<b>NOTES</b>	led colour combinable on request, other RAL on request

<b>POWER SUPPLY</b>	max 18W - max 500mA
<b>CODE</b>	DLT09 ■■■□
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber B - Blue
<b>OPTICS</b>	N 10° M 25° W 40° X 60°
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	1350lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	1300lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	9 power LEDs
<b>MATERIAL</b>	body in anodized aluminium, cover in painted aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling)
<b>NOTES</b>	led colour combinable on request, other RAL on request

## Linea 3

## Linea 6

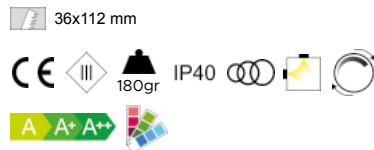




<b>POWER SUPPLY</b>	max 6W - max 500mA
<b>CODE</b>	LIN03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber
<b>FINISHES</b>	W - White G - Grey B - Black
<b>OPTICS</b>	<input type="checkbox"/> <span style="display: inline-block; text-align: center;"> <div style="display: flex; justify-content: space-around; width: 100%;"> <div style="text-align: center;">N 10°</div> <div style="text-align: center;">M 25°</div> <div style="text-align: center;">W 40°</div> <div style="text-align: center;">X 60°</div> <div style="text-align: center;">E 30°x65°</div> </div> </span>
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	420lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	3 power LEDs
<b>MATERIAL</b>	anodized or painted aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall)
<b>NOTES</b>	other RAL on request

<b>POWER SUPPLY</b>	max 12W - max 500mA
<b>CODE</b>	LIN06 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber
<b>FINISHES</b>	W - White G - Grey B - Black
<b>OPTICS</b>	<input type="checkbox"/> <span style="display: inline-block; text-align: center;"> <div style="display: flex; justify-content: space-around; width: 100%;"> <div style="text-align: center;">N 10°</div> <div style="text-align: center;">M 25°</div> <div style="text-align: center;">W 40°</div> <div style="text-align: center;">X 60°</div> <div style="text-align: center;">E 30°x65°</div> </div> </span>
<b>LUMEN OUTPUT SOURCE</b>	900lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	860lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	6 power LEDs
<b>MATERIAL</b>	anodized or painted aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall)
<b>NOTES</b>	other RAL on request

## Linea 9

## Linea 15

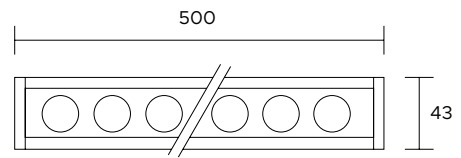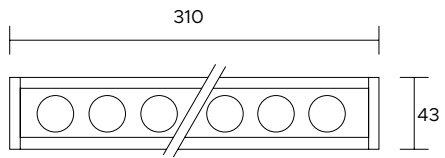

36x304 mm



36x494 mm





<b>POWER SUPPLY</b>	max 18W - max 500mA															
<b>CODE</b>	LIN09 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>FINISHES</b>	W - White G - Grey B - Black															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>LUMEN OUTPUT SOURCE</b>	1350lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	1300lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	9 power LEDs															
<b>MATERIAL</b>	anodized or painted aluminium															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall)															
<b>NOTES</b>	other RAL on request															

<b>POWER SUPPLY</b>	max 30W - max 500mA															
<b>CODE</b>	LIN15 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>FINISHES</b>	W - White G - Grey B - Black															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>LUMEN OUTPUT SOURCE</b>	2250lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	1720lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	15 power LEDs															
<b>MATERIAL</b>	anodized or painted aluminium															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall)															
<b>NOTES</b>	other RAL on request															



## Linea a 3

## Linea a 6



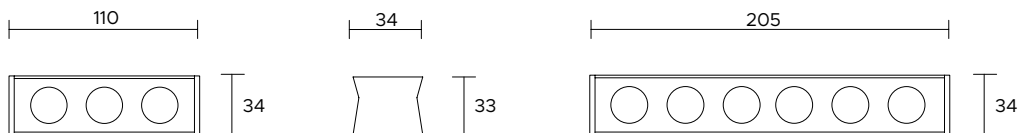
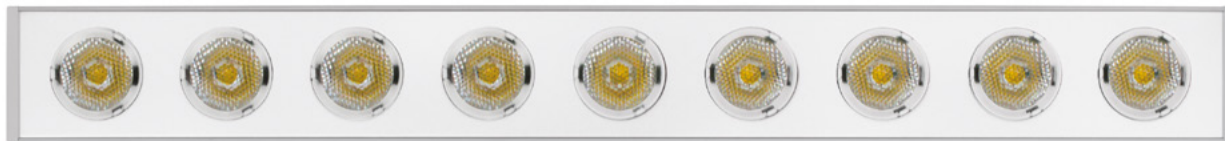


<b>POWER SUPPLY</b>	max 3W - max 350mA
<b>CODE</b>	LIA03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber
<b>FINISHES</b>	W - White G - Grey B - Black
<b>OPTICS</b>	<input type="checkbox"/>
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	320lm (3000°K, 350mA, 40°)
<b>LED NUMBER</b>	3 power LEDs
<b>MATERIAL</b>	anodized or painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall)
<b>NOTES</b>	other RAL on request

<b>POWER SUPPLY</b>	max 6W - max 350mA
<b>CODE</b>	LIA06 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber
<b>FINISHES</b>	W - White G - Grey B - Black
<b>OPTICS</b>	<input type="checkbox"/>
<b>LUMEN OUTPUT SOURCE</b>	660lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	640lm (3000°K, 350mA, 40°)
<b>LED NUMBER</b>	6 power LEDs
<b>MATERIAL</b>	anodized or painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall)
<b>NOTES</b>	other RAL on request

## Linea a 9

## Linea a 15

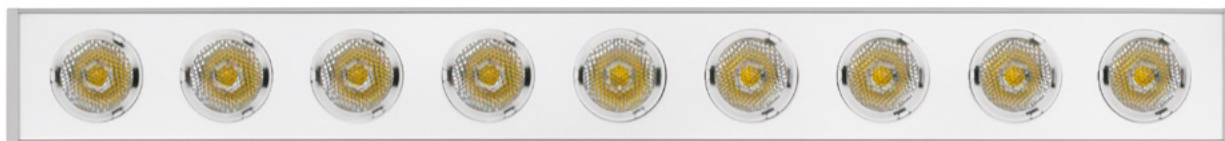

<b>POWER SUPPLY</b>	max 9W - max 350mA															
<b>CODE</b>	LIA09 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">□</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>FINISHES</b>	W - White G - Grey B - Black															
<b>OPTICS</b>	<input type="checkbox"/> <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>LUMEN OUTPUT SOURCE</b>	990lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	960lm (3000°K, 350mA, 40°)															
<b>LED NUMBER</b>	9 power LEDs															
<b>MATERIAL</b>	anodized or painted aluminium															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (ceiling, wall)															
<b>NOTES</b>	other RAL on request															


<b>POWER SUPPLY</b>	max 15W - max 350mA															
<b>CODE</b>	LIA15 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">□</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber															
<b>FINISHES</b>	W - White G - Grey B - Black															
<b>OPTICS</b>	<input type="checkbox"/> <table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> </tr> </table>	N	M	W	X	E						10°	25°	40°	60°	30°x65°
N	M	W	X	E												
10°	25°	40°	60°	30°x65°												
<b>LUMEN OUTPUT SOURCE</b>	1650lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	1600lm (3000°K, 350mA, 40°)															
<b>LED NUMBER</b>	15 power LEDs															
<b>MATERIAL</b>	anodized or painted aluminium															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (ceiling, wall)															
<b>NOTES</b>	other RAL on request															




# Rotor Lamps



# Rotor Lamp 6

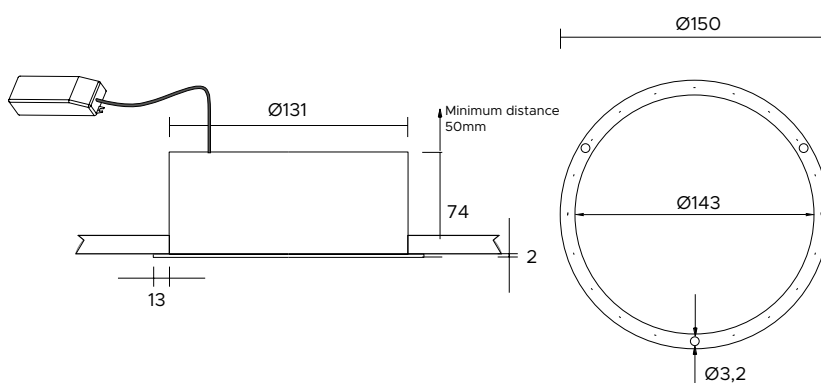


Ø 132 mm




<b>POWER SUPPLY</b>	max 12W - 220V/240V												
<b>CODE</b>	RTL06 <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
10°	25°	40°	60°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	900lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	660lm (3000°K, 500mA, 40°)												
<b>LED NUMBER</b>	6 power LEDs + 3 RGB LEDs Ø5mm												
<b>MATERIAL</b>	body in painted aluminium												
<b>DRIVER</b>	included - dim. 163 x 43 x 32mm, remote control included												
<b>POWER CABLE</b>													
<b>WIRING</b>													
<b>MOUNTING</b>	recessed (ceiling)												
<b>NOTES</b>	led colour combinable on request, other RAL on request, brightness can be controlled through the remote control												

# Rotor Lamp 12

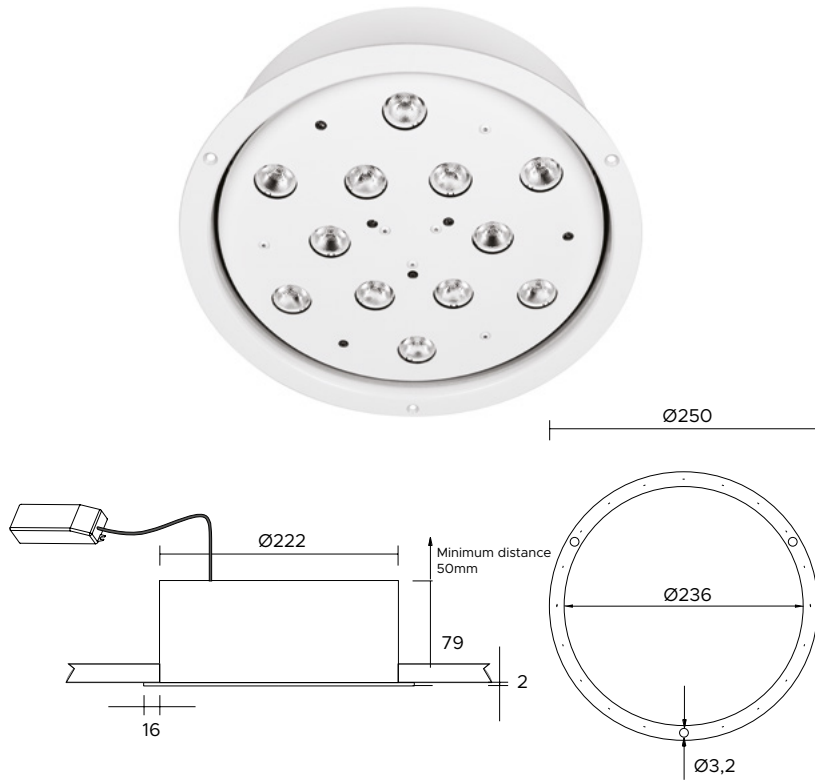


Ø 225 mm



<b>POWER SUPPLY</b>	max 24W - 220V/240V												
<b>CODE</b>	RTL12 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
10°	25°	40°	60°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	1800lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	1690lm (3000°K, 500mA, 40°)												
<b>LED NUMBER</b>	12 power LEDs + 6 RGB LEDs Ø5mm												
<b>MATERIAL</b>	body in painted aluminium												
<b>DRIVER</b>	included - dim.163 x 43 x 32mm, remote control included												
<b>POWER CABLE</b>													
<b>WIRING</b>													
<b>MOUNTING</b>	recessed (ceiling)												
<b>NOTES</b>	led colour combinable on request, other RAL on request, brightness can be controlled through the remote control												



# Rotor Lamp 12 DW

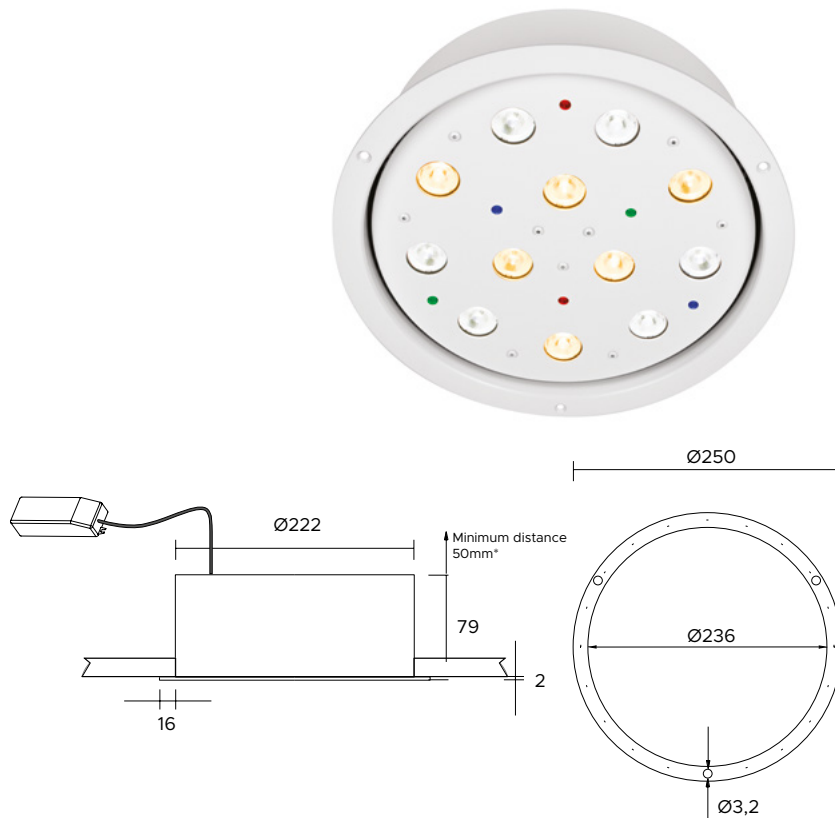

Ø 225 mm



<b>POWER SUPPLY</b>	max 24W - 220V/240V								
<b>CODE</b>	RTD12 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>								
<b>LED COLOUR</b>	K - Dynamic white								
<b>OPTICS</b>	<table border="0"> <tr> <td><input checked="" type="checkbox"/> N</td> <td><input checked="" type="checkbox"/> M</td> <td><input checked="" type="checkbox"/> W</td> <td><input checked="" type="checkbox"/> X</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	<input checked="" type="checkbox"/> N	<input checked="" type="checkbox"/> M	<input checked="" type="checkbox"/> W	<input checked="" type="checkbox"/> X	10°	25°	40°	60°
<input checked="" type="checkbox"/> N	<input checked="" type="checkbox"/> M	<input checked="" type="checkbox"/> W	<input checked="" type="checkbox"/> X						
10°	25°	40°	60°						
<b>FINISHES</b>	W - White G - Grey B - Black								
<b>LUMEN OUTPUT SOURCE</b>	1800lm (3000°K, 500mA)								
<b>DELIVERED LUMEN OUTPUT</b>	1690lm (3000°K, 500mA, 40°)								
<b>LED NUMBER</b>	12 power LEDs + 6 RGB LEDs Ø5mm								
<b>MATERIAL</b>	body in painted aluminium								
<b>DRIVER</b>	included - dim.163 x 43 x 32mm, remote control included								
<b>POWER CABLE</b>									
<b>WIRING</b>									
<b>MOUNTING</b>	recessed (ceiling)								
<b>NOTES</b>	Other RAL on request. Brightness and colour temperature can be personalized through the remote control.								



PLG has a wide variety, constantly updated, of LED light luminaires for indoor spaces. Static, adjustable, anti-glare, with different sizes, finishes and beams, PLG devices are designed to adapt themselves to all needs and architectural setting of the location to be illuminated, always ensuring visual wellness, energetic efficiency and high chromatic quality.





# Indoor

PLG dispone di un'ampia varietà, in costante aggiornamento, di apparecchi LED per l'illuminazione di ambienti interni.

Fissi, orientabili, antiabbagliamento, con dimensioni, finiture e fasci luminosi differenti, i dispositivi PLG sono progettati per adattarsi ad ogni necessità e configurazione architettonica dell'ambiente da illuminare, garantendo sempre benessere visivo, efficienza energetica e alta qualità cromatica.





Static Recessed  
Dafne  
pag. 71



Static Recessed  
Apollo  
pag. 72



Static Recessed  
Argo  
pag. 73



Static Recessed  
Sharp  
pag. 74



Static Recessed  
Delta square 9 - 18  
pag. 75



Static Recessed  
Asy r  
pag. 76



Static Recessed  
Asy  
pag. 77



Backward Optic Recessed  
Dafne deep  
pag. 79



Backward Optic Recessed  
Apollo deep  
pag. 80



Trimless Recessed  
Raze  
pag. 83



Trimless Recessed  
Raze 3  
pag. 84



Trimless Recessed  
Raze 6  
pag. 85



Trimless Recessed  
Raze 9  
pag. 86




Trimless Recessed  
Raze C9  
pag. 87



Trimless Recessed  
Raze 12  
pag. 88



Trimless Recessed  
Raze 20  
pag. 89



Trimless Recessed  
Accessories  
pag. 90



Adjustable Recessed  
Dafne adj  
pag. 93



Adjustable Recessed  
Apollo adj  
pag. 94



Adjustable Recessed  
Sharp adj  
pag. 95



Adjustable Recessed  
Punto r  
pag. 96



Adjustable Recessed  
Palco 50 r  
pag. 97



Adjustable Recessed  
Palco 70 r  
pag. 98



Adjustable Recessed  
Palco 90 r  
pag. 99





Wall Recessed  
Clio  
pag. 101



Wall Recessed  
Clio round  
pag. 101



Wall Recessed  
Bi-Punto  
pag. 102



Ceiling and Wall Surface  
Koala  
pag. 105



Ceiling and Wall Surface  
Koala 2  
pag. 105



Ceiling and Wall Surface  
Koala 3  
pag. 106



Ceiling and Wall Surface  
Koala L  
pag. 107



Ceiling and Wall Surface  
Koala L2  
pag. 107



Ceiling and Wall Surface  
Koala L3  
pag. 108



Ceiling and Wall Surface  
Punto  
pag. 109



Ceiling and Wall Surface  
Punto square  
pag. 110



Ceiling and Wall Surface  
Punto magnetic  
pag. 111



Ceiling and Wall Surface  
Palco 90 a  
pag. 112



Ceiling and Wall Surface  
Sirio a  
pag. 113



Track lights  
Joy b 48V  
pag. 115



Track lights  
Joy twin 48V  
pag. 116



Track lights  
Joy 3 b 48V  
pag. 117



Track lights  
Joy 3 Twin 48V  
pag. 118



Track lights  
Joy Zoom b 48V  
pag. 119



Track lights  
Sirio b 48V  
pag. 120



Track lights  
Sirio Twin 48V  
pag. 121



Track lights  
Sirio b  
pag. 122



Track lights  
Palco 50  
pag. 123



Track lights  
Palco 70  
pag. 124



Track lights  
Palco 90  
pag. 125



Track lights  
Sharp  
pag. 126



Linear lights  
Pictor 5  
pag. 129



Linear lights  
Pictor 10  
pag. 130



Linear lights  
Pictor a 5  
pag. 131



Linear lights  
Pictor a 10  
pag. 132



Projectors  
Vision  
pag. 135




# Static Recessed


Indoor - Static recessed



# Dafne



Tear-resistant system





1 - Honeycomb louver

Ø 48mm



<b>POWER SUPPLY</b>	max 9W - max 500mA									
<b>CODE</b>	DF009 ■■■■									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table>	M	W	X				24°	36°	60°
M	W	X								
24°	36°	60°								
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten									
<b>FILTERS</b>	1 - Honeycomb louver									
<b>LUMEN OUTPUT SOURCE</b>	1200lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1080lm (3000°K, 500mA, 36°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 323 and 326									
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>NOTES</b>	other RAL on request									

# Apollo

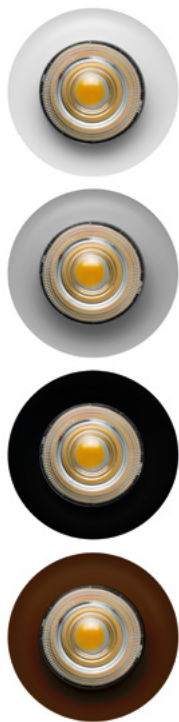


1 - Honeycomb louvre

Ø 72mm



<b>POWER SUPPLY</b>	max 12W - max 350mA									
<b>CODE</b>	APL12 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: blue;">■</span> <span style="color: red;">■</span>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>	N	M	W				15°	25°	40°
N	M	W								
15°	25°	40°								
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten									
<b>FILTERS</b>	1 - Honeycomb louvre									
<b>LUMEN OUTPUT SOURCE</b>	1730lm (3000°K, 350mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1480lm (3000°K, 350mA, 40°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 322 and 326									
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>NOTES</b>	other RAL on request									

# Argo

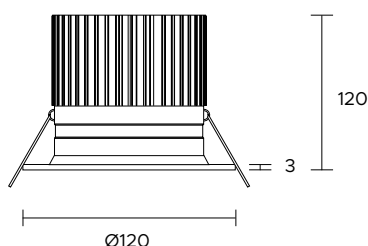

Ø 105mm




<b>POWER SUPPLY</b>	max 18W - max 500mA												
<b>CODE</b>	ARG18 ■■■ □												
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>18°</td> <td>30°</td> <td>55°</td> <td>70°</td> </tr> </table>	N	M	W	X					18°	30°	55°	70°
N	M	W	X										
18°	30°	55°	70°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	2550lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	2470lm (3000°K, 500mA, 55°)												
<b>LED NUMBER</b>	1 power LED multichip												
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling)												
<b>NOTES</b>	other RAL on request												

Ø105 mm



<b>POWER SUPPLY</b>	max 24W - max 700mA												
<b>CODE</b>	ARG24 ■■■ □												
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>18°</td> <td>30°</td> <td>55°</td> <td>70°</td> </tr> </table>	N	M	W	X					18°	30°	55°	70°
N	M	W	X										
18°	30°	55°	70°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	3500lm (3000°K, 700mA)												
<b>DELIVERED LUMEN OUTPUT</b>	3320lm (3000°K, 700mA, 55°)												
<b>LED NUMBER</b>	1 power LED multichip												
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling)												
<b>NOTES</b>	other RAL on request												

## Sharp

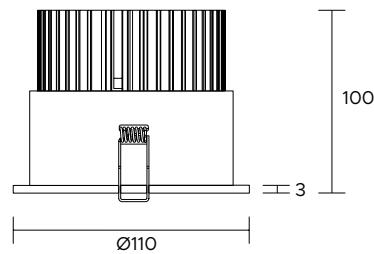



Ø 100mm




<b>POWER SUPPLY</b>	max 18W - max 500mA
<b>CODE</b>	SRP01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N 10°
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	2550lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	1800lm (3000°K, 500mA, 10°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 0,5 mt 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling)
<b>NOTES</b>	other RAL on request






## Delta square 9

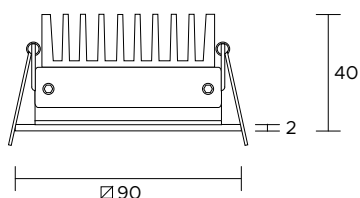




<b>POWER SUPPLY</b>	max 9W - max 250mA
<b>CODE</b>	DTS09 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	 Diffused
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	1200lm (3000°K, 250mA)
<b>DELIVERED LUMEN OUTPUT</b>	820lm (3000°K, 250mA, Diff.)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium
<b>DRIVER</b>	not included, see pag. 321 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling)
<b>NOTES</b>	other RAL on request

## Delta square 18

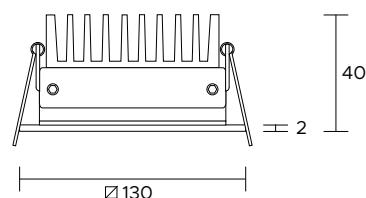

<b>POWER SUPPLY</b>	max 18W - max 500mA
<b>CODE</b>	DTS18 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	 Diffused
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	2550lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	1590lm (3000°K, 500mA, Diff.)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling)
<b>NOTES</b>	other RAL on request

## Asy r

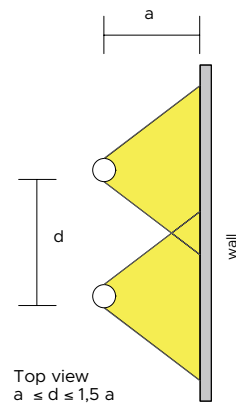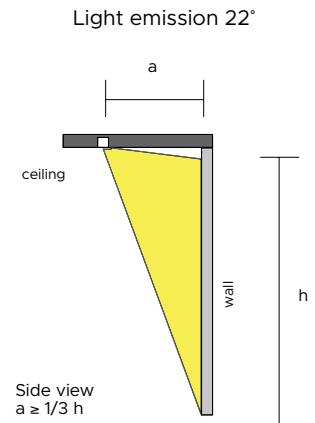


foro Ø72



<b>POWER SUPPLY CODE</b>	max 12W - max 350mA ASR12 ■■■□
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	A2 Wall Washer
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten
<b>LUMEN OUTPUT SOURCE</b>	1730lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	1640lm (3000°K, 350mA, Asymmetric)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling)
<b>NOTES</b>	other RAL on request

# Asy

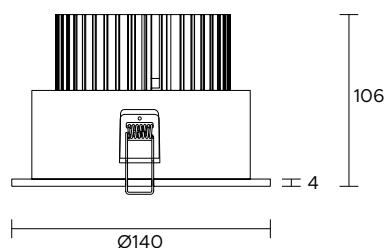

Ø 130mm



<b>POWER SUPPLY</b>	max 24W - max 700mA
<b>CODE</b>	AY024 ■■■ □
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	A2 Wall Washer
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	3500lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	2370lm (3000°K, 700mA, Asymmetric)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall)
<b>NOTES</b>	other RAL on request


# Backward Optic Recessed



Indoor - Backward optic recessed



# Dafne deep





Ø 48mm



<b>POWER SUPPLY</b>	max 9W - max 500mA									
<b>CODE</b>	DFD09 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">24°</td> <td style="text-align: center;">36°</td> <td style="text-align: center;">60°</td> </tr> </table>	M	W	X				24°	36°	60°
M	W	X								
24°	36°	60°								
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten									
<b>LUMEN OUTPUT SOURCE</b>	1200lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1080lm (3000°K, 500mA, 36°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 323 and 326									
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>NOTES</b>	other RAL on request									

# Apollo deep

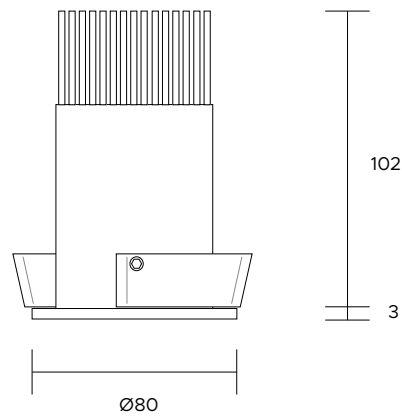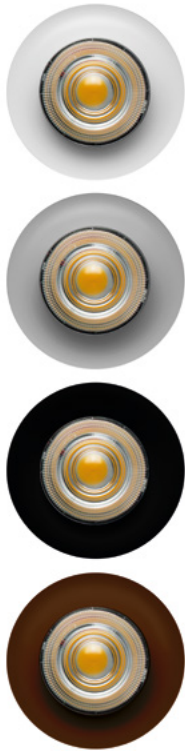

Ø 72mm



<b>POWER SUPPLY</b>	max 12W - max 350mA						
<b>CODE</b>	APD12 ■■■□						
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K						
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>	N	M	W	15°	25°	40°
N	M	W					
15°	25°	40°					
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten						
<b>LUMEN OUTPUT SOURCE</b>	1730lm (3000°K, 350mA)						
<b>DELIVERED LUMEN OUTPUT</b>	1480lm (3000°K, 350mA, 40°)						
<b>LED NUMBER</b>	1 power LED multichip						
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium						
<b>DRIVER</b>	not included, see pag. 322 and 326						
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable						
<b>WIRING</b>	in series						
<b>MOUNTING</b>	recessed (ceiling)						
<b>NOTES</b>	other RAL on request						



Indoor - Backward optic recessed




# Trimless Recessed

Indoor - Trimless recessed





# Raze




Ø30 mm



<b>POWER SUPPLY</b>	max 1W - max 350mA									
<b>CODE</b>	RZ001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>									
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> </tr> </table>	N	M	W				20°	35°	50°
N	M	W								
20°	35°	50°								
<b>FINISHES</b>	W - White G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)									
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 50°)									
<b>LED NUMBER</b>	1 power LED									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 322 and 326									
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>ACCESSORIES</b>	see pag. 90									
<b>NOTES</b>	other RAL on request									

# Raze 3




Ø40 mm



<b>POWER SUPPLY</b>	max 3W - max 700mA								
<b>CODE</b>	RZ301								
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber								
<b>OPTICS</b>	<table border="0"> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>					10°	25°	40°	60°
10°	25°	40°	60°						
<b>FINISHES</b>	W - White G - Grey B - Black								
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)								
<b>DELIVERED LUMEN OUTPUT</b>	175lm (3000°K, 700mA, 40°)								
<b>LED NUMBER</b>	1 power LED								
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium								
<b>DRIVER</b>	not included, see pag. 324 and 326								
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable								
<b>WIRING</b>	in series								
<b>MOUNTING</b>	recessed (ceiling)								
<b>ACCESSORIES</b>	see pag. 90								
<b>NOTES</b>	other RAL on request								

# Raze 6




Ø40 mm



<b>POWER SUPPLY</b>	max 6W - max 500mA									
<b>CODE</b>	RZ601									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber									
<b>OPTICS</b>	<table border="1"> <thead> <tr> <th>N</th> <th>M</th> <th>W</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>35°</td> </tr> </tbody> </table>	N	M	W				15°	25°	35°
N	M	W								
15°	25°	35°								
<b>FINISHES</b>	W - White G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	380lm (3000°K, 500mA, 35°)									
<b>LED NUMBER</b>	3 power LEDs									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 323 and 326									
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>ACCESSORIES</b>	see pag. 90									
<b>NOTES</b>	other RAL on request									

# Raze 9




Ø60 mm



<b>POWER SUPPLY</b>	max 9W - max 700mA									
<b>CODE</b>	RZ901									
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber									
<b>OPTICS</b>	<table border="0"> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>				N	M	W	15°	25°	40°
N	M	W								
15°	25°	40°								
<b>FINISHES</b>	W - White G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	570lm (3000°K, 700mA)									
<b>DELIVERED LUMEN OUTPUT</b>	460lm (3000°K, 700mA, 40°)									
<b>LED NUMBER</b>	3 power LEDs									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 324 and 326									
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>ACCESSORIES</b>	see pag. 90									
<b>NOTES</b>	other RAL on request									















# Raze C9




 Ø60 mm



<b>POWER SUPPLY</b>	max 9W - max 500mA						
<b>CODE</b>	RZC09   						
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K						
<b>OPTICS</b>	<table border="0"> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table>				24°	36°	60°
							
24°	36°	60°					
<b>FINISHES</b>	W - White G - Grey B - Black						
<b>LUMEN OUTPUT SOURCE</b>	1200lm (3000°K, 500mA)						
<b>DELIVERED LUMEN OUTPUT</b>	1080lm (3000°K, 500mA, 36°)						
<b>LED NUMBER</b>	1 power LED multichip						
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium						
<b>DRIVER</b>	not included, see pag. 323 and 326						
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable						
<b>WIRING</b>	in series						
<b>MOUNTING</b>	recessed (ceiling)						
<b>ACCESSORIES</b>	see pag. 90						
<b>NOTES</b>	other RAL on request						

# Raze 12




Ø82 mm



<b>POWER SUPPLY</b>	max 12W - max 350mA									
<b>CODE</b>	RZ012 ■■■□									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>	N	M	W				15°	25°	40°
N	M	W								
15°	25°	40°								
<b>FINISHES</b>	W - White G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	1730lm (3000°K, 350mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1480lm (3000°K, 350mA, 40°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 322 and 326									
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>ACCESSORIES</b>	see pag. 90									
<b>NOTES</b>	other RAL on request									

# Raze 20

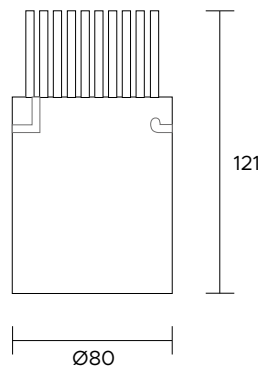


Ø90 mm



<b>POWER SUPPLY</b>	max 18W - 500mA									
<b>CODE</b>	RZ020 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: grey;">■</span>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>	N	M	W				15°	25°	40°
N	M	W								
15°	25°	40°								
<b>FINISHES</b>	W - White G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	2550lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	2170lm (3000°K, 500mA, 40°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 323 and 326									
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>ACCESSORIES</b>	see pag. 90									
<b>NOTES</b>	other RAL on request									

# Raze


## Installation Accessories



Code: **CRZ01**

Plasterboard flange for  
**RAZE**


W - White  
G - Grey  
B - Black



Code: **CRZ02**

Plasterboard flange for  
**RAZE 3**


W - White  
G - Grey  
B - Black



Code: **CRZ03**

Plasterboard flange for  
**RAZE 6**


W - White  
G - Grey  
B - Black



Code: **CRZ04**

Plasterboard flange for  
**RAZE 9 /C9**


W - White  
G - Grey  
B - Black



Code: **CRZ05**

Plasterboard flange for  
**RAZE 12**

W - White  
G - Grey  
B - Black



Code: **CRZ06**

Plasterboard flange for  
**RAZE 20**

W - White  
G - Grey  
B - Black

⚠ To be ordered at the same time as the lighting device





Indoor - Trimless recessed




# Adjustable Recessed

Indoor - Adjustable recessed



# Dafne adj

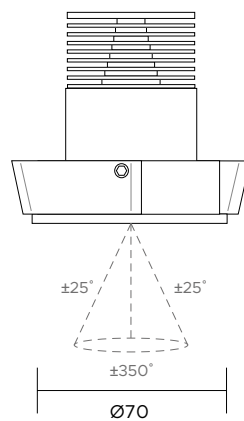


Tear-resistant system

Ø 63mm



<b>POWER SUPPLY</b>	max 9W - max 500mA									
<b>CODE</b>	DFJ09 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table>	M	W	X				24°	36°	60°
M	W	X								
24°	36°	60°								
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten									
<b>LUMEN OUTPUT SOURCE</b>	1200lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1080lm (3000°K, 500mA, 36°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 323 and 326									
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>NOTES</b>	other RAL on request									

# Apollo adj

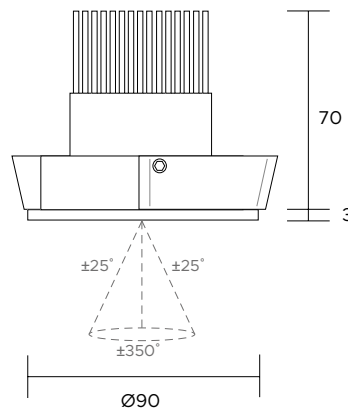


Ø 84mm



<b>POWER SUPPLY</b>	max 12W - max 350mA									
<b>CODE</b>	APJ12 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: blue;">■</span>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td style="text-align: center;">N</td> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">15°</td> <td style="text-align: center;">25°</td> <td style="text-align: center;">40°</td> </tr> </table>	N	M	W				15°	25°	40°
N	M	W								
15°	25°	40°								
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten									
<b>LUMEN OUTPUT SOURCE</b>	1730lm (3000°K, 350mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1480lm (3000°K, 350mA, 40°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium									
<b>DRIVER</b>	not included, see pag. 322 and 326									
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling)									
<b>NOTES</b>	other RAL on request									



# Sharp adj

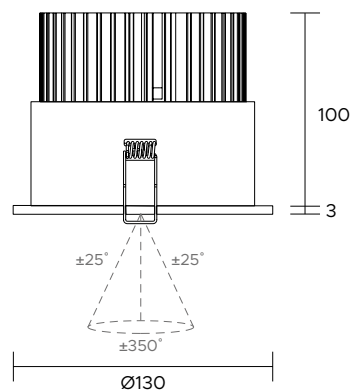



Ø 122mm







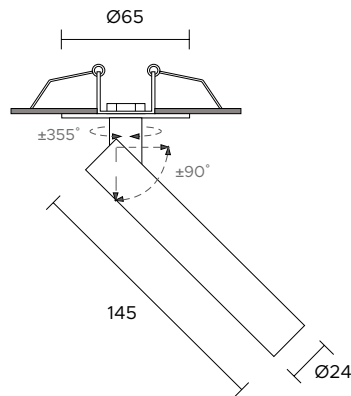







<b>POWER SUPPLY</b>	max 18W - max 500mA
<b>CODE</b>	SRP02 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	2550lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	1800lm (3000°K, 500mA, 10°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium, flange in painted aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed ceiling
<b>NOTES</b>	other RAL on request

# Punto r




 40mm



<b>POWER SUPPLY</b>	max 4W - max 1200mA												
<b>CODE</b>	PNT02 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
													
10°	25°	40°	60°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	250lm (3000°K, 1200mA)												
<b>DELIVERED LUMEN OUTPUT</b>	190lm (3000°K, 1200mA, 40°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	painted aluminium												
<b>DRIVER</b>	not included, see pag. 325 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall)												
<b>NOTES</b>	other RAL on request												

# Palco 50 r

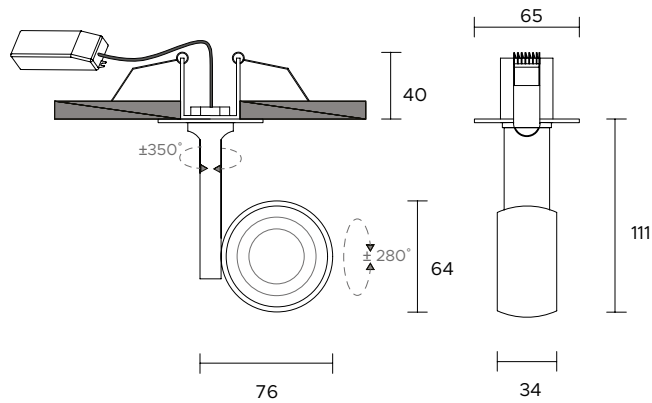


Ø 50mm



<b>POWER SUPPLY</b>	max 11W - 220V/240V									
<b>CODE</b>	PLR01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td style="text-align: center;">N</td> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">15°</td> <td style="text-align: center;">30°</td> <td style="text-align: center;">45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	W - White B - Black									
<b>LUMEN OUTPUT SOURCE</b>	1630lm (3000°K, 300mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1170lm (3000°K, 300mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	painted aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable									
<b>MOUNTING</b>	recessed (ceiling, wall)									
<b>NOTES</b>	other RAL on request									

## Palco 70 r

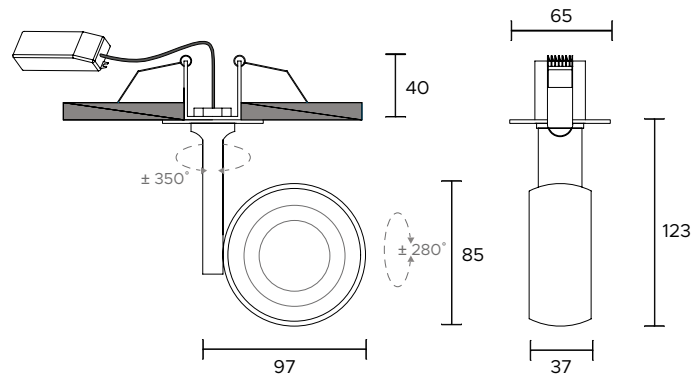


Ø 50mm



<b>POWER SUPPLY</b>	max 16W - 220V/240V									
<b>CODE</b>	PLR02 ■■■□									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	W - White B - Black									
<b>LUMEN OUTPUT SOURCE</b>	2360lm (3000°K, 450mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1970lm (3000°K, 450mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	painted aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable									
<b>MOUNTING</b>	recessed (ceiling, wall)									
<b>NOTES</b>	other RAL on request									



# Palco 90 r

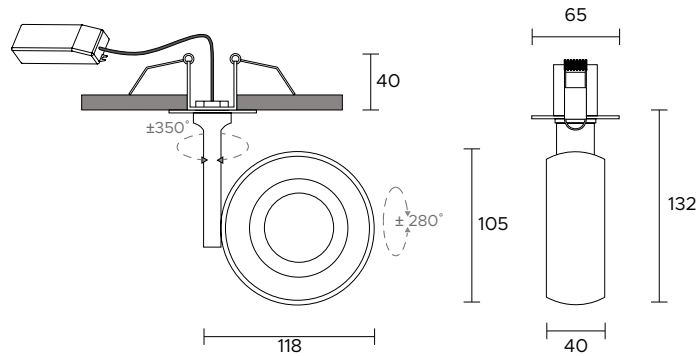

Ø 50mm




<b>POWER SUPPLY</b>	max 22W - 220V/240V									
<b>CODE</b>	PLR03 ■■■□									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	W - White B - Black									
<b>LUMEN OUTPUT SOURCE</b>	3000lm (3000°K, 650mA)									
<b>DELIVERED LUMEN OUTPUT</b>	2450lm (3000°K, 650mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	painted aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable									
<b>MOUNTING</b>	recessed (ceiling, wall)									
<b>NOTES</b>	other RAL on request									


# Wall Recessed


Indoor - Wall recessed

## Clio

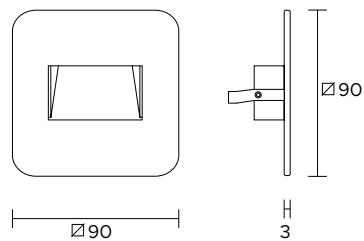


## Clio round

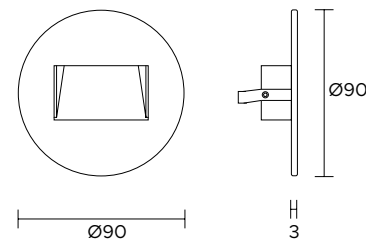





  $\nabla$  100mm




  $\nabla$  100mm



<b>POWER SUPPLY</b>	max 3W - 220V/240V
<b>CODE</b>	CL001 
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber
<b>OPTICS</b>	 Asymmetric
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, Asymmetric)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	includes 1,5 mt Liyy 2 x 0,50 cable
<b>MOUNTING</b>	wall recessed
<b>ACCESSORIES</b>	junction box included
<b>NOTES</b>	other RAL on request
















<b>POWER SUPPLY</b>	max 3W - 220V/240V
<b>CODE</b>	CLR01 
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber
<b>OPTICS</b>	 Asymmetric
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, Asymmetric)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	includes 1,5 mt Liyy 2 x 0,50 cable
<b>MOUNTING</b>	wall recessed
<b>ACCESSORIES</b>	junction box included
<b>NOTES</b>	other RAL on request

## Bi - Punto



 Ø40mm



<b>POWER SUPPLY</b>	max 3W x2 - max 700mA												
<b>CODE</b>	BPNO2   												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
													
10°	25°	40°	60°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA) x2												
<b>DELIVERED LUMEN OUTPUT</b>	175lm (3000°K, 700mA, 40°) x2												
<b>LED NUMBER</b>	2 power LEDs												
<b>MATERIAL</b>	painted aluminium												
<b>DRIVER</b>	not included, see pag. 324 and 326												
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (wall)												
<b>NOTES</b>	other RAL on request												




CAFFÈ	GELATI
CAFFÈ LATTE	CIOCCOLATO
CAPPUCCINO	CAFFÈ
ESPRESSO	PISTACCHIO
CAFFÈ MOCHA	COCCO
AFFOGATO	NOCCIOLA
CAFFÈ FREDDO	LIMONE
CAFFÈ LUNGO	FRAGOLA
CAFFÈ CORRETTO	STRACCIATELLA
AMERICANO	TUTTI FRUTTI
MACCHIATO	FIOR DI LATTE
CAFFÈ con PANNA	PESCA
CAFFÈ RISTRETTO	FRUTTI DI BOSCO
CAFFÈ DOPPIO	MENTA
CAFFÈ con SCHUMA	AMARENA


# Ceiling and Wall Surface



## Koala 1

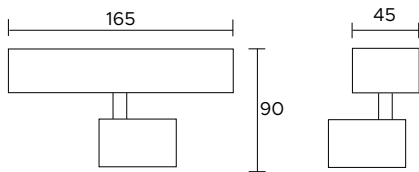


## Koala 2

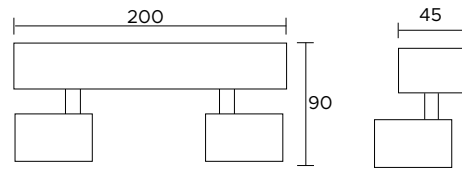

<b>POWER SUPPLY</b>	max 6W - 220V/240V
<b>CODE</b>	KOA01 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input type="checkbox"/> M <input type="checkbox"/> W <input type="checkbox"/> X 24° 36° 60°
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	890lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	710lm (3000°K, 350mA, 36°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall surface
<b>NOTES</b>	other RAL on request

<b>POWER SUPPLY</b>	max 6W x2 - 220V/240V
<b>CODE</b>	KOA02 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input type="checkbox"/> M <input type="checkbox"/> W <input type="checkbox"/> X 24° 36° 60°
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	890lm (3000°K, 350mA) x2
<b>DELIVERED LUMEN OUTPUT</b>	710lm (3000°K, 350mA, 36°) x2
<b>LED NUMBER</b>	2 power LEDs multichip
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall surface
<b>NOTES</b>	other RAL on request


# Koala 3

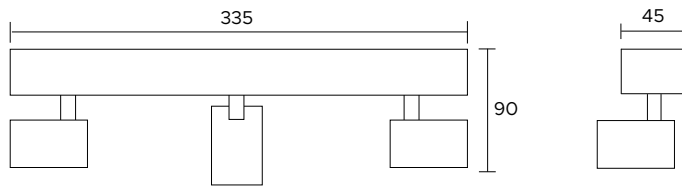



<b>POWER SUPPLY</b>	max 6W x3 - 220V/240V									
<b>CODE</b>	KOA03 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table>	M	W	X				24°	36°	60°
M	W	X								
24°	36°	60°								
<b>FINISHES</b>	W - White G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	890lm (3000°K, 350mA) x3									
<b>DELIVERED LUMEN OUTPUT</b>	710lm (3000°K, 350mA, 36°) x3									
<b>LED NUMBER</b>	3 power LEDs multichip									
<b>MATERIAL</b>	painted aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>										
<b>MOUNTING</b>	ceiling, wall surface									
<b>NOTES</b>	other RAL on request									



# Koala L 1





# Koala L 2

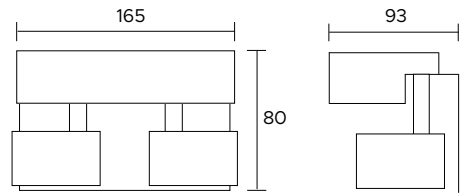

<b>POWER SUPPLY</b>	max 6W - 220V/240V
<b>CODE</b>	KOL01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: grey;">■</span> <span style="color: black;">■</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<span style="display: inline-block; text-align: center;">M ▲ 24°</span> <span style="display: inline-block; text-align: center;">W ▲ 36°</span> <span style="display: inline-block; text-align: center;">X ▲ 60°</span>
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	890lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	710lm (3000°K, 350mA, 36°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall surface
<b>NOTES</b>	other RAL on request


<b>POWER SUPPLY</b>	max 6W x2 - 220V/240V
<b>CODE</b>	KOL02 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: grey;">■</span> <span style="color: black;">■</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<span style="display: inline-block; text-align: center;">M ▲ 24°</span> <span style="display: inline-block; text-align: center;">W ▲ 36°</span> <span style="display: inline-block; text-align: center;">X ▲ 60°</span>
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	890lm (3000°K, 350mA) x2
<b>DELIVERED LUMEN OUTPUT</b>	710lm (3000°K, 350mA, 36°) x2
<b>LED NUMBER</b>	2 power LEDs multichip
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall surface
<b>NOTES</b>	other RAL on request

# Koala L 3

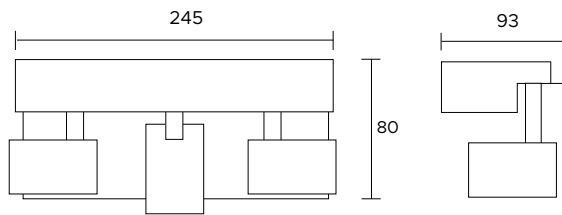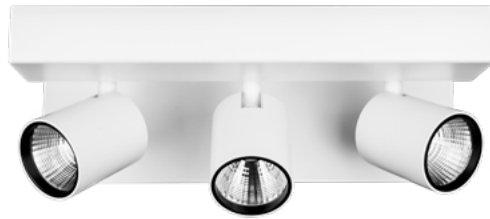


<b>POWER SUPPLY</b>	max 6W x3 - 220V/240V									
<b>CODE</b>	KOA03 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td><input type="checkbox"/> M</td> <td><input type="checkbox"/> W</td> <td><input type="checkbox"/> X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>24°</td> <td>36°</td> <td>60°</td> </tr> </table>	<input type="checkbox"/> M	<input type="checkbox"/> W	<input type="checkbox"/> X				24°	36°	60°
<input type="checkbox"/> M	<input type="checkbox"/> W	<input type="checkbox"/> X								
24°	36°	60°								
<b>FINISHES</b>	W - White G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	890lm (3000°K, 350mA) x3									
<b>DELIVERED LUMEN OUTPUT</b>	710lm (3000°K, 350mA, 36°) x3									
<b>LED NUMBER</b>	3 power LEDs multichip									
<b>MATERIAL</b>	painted aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>										
<b>MOUNTING</b>	ceiling, wall surface									
<b>NOTES</b>	other RAL on request									

# Punto

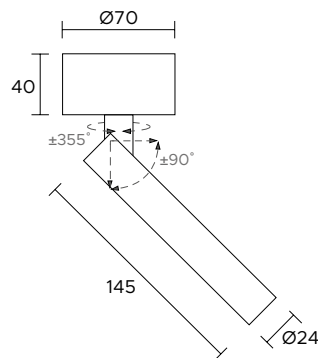

<b>POWER SUPPLY</b>	max 4W - 220V/240V															
<b>CODE</b>	PNT01 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K															
<b>OPTICS</b>	<table border="0"> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td></td> </tr> </table>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N	M	W	X		10°	25°	40°	60°	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>												
N	M	W	X													
10°	25°	40°	60°													
<b>FINISHES</b>	W - White G - Grey B - Black															
<b>LUMEN OUTPUT SOURCE</b>	250lm (3000°K, 1200mA)															
<b>DELIVERED LUMEN OUTPUT</b>	190lm (3000°K, 1200mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	painted aluminium															
<b>DRIVER</b>	included															
<b>POWER CABLE</b>																
<b>MOUNTING</b>	ceiling, wall surface															
<b>NOTES</b>	other RAL on request															


# Punto square



<b>POWER SUPPLY</b>	max 4W - 220V/240V												
<b>CODE</b>	PNT03 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
10°	25°	40°	60°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	250lm (3000°K, 1200mA)												
<b>DELIVERED LUMEN OUTPUT</b>	190lm (3000°K, 1200mA, 40°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	painted aluminium												
<b>DRIVER</b>	included												
<b>POWER CABLE</b>													
<b>MOUNTING</b>	ceiling, wall surface												
<b>NOTES</b>	other RAL on request												




# Punto magnetic

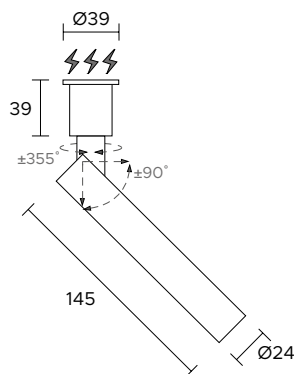



<b>POWER SUPPLY</b>	max 4W - max 1200mA												
<b>CODE</b>	PNT04 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
10°	25°	40°	60°										
<b>FINISHES</b>	W - White G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	250lm (3000°K, 1200mA)												
<b>DELIVERED LUMEN OUTPUT</b>	190lm (3000°K, 1200mA, 40°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	painted aluminium												
<b>DRIVER</b>	not included, see pag. 325 and 326												
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2x0,50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	ceiling, wall surface												
<b>NOTES</b>	other RAL on request												

## Palco 90 a

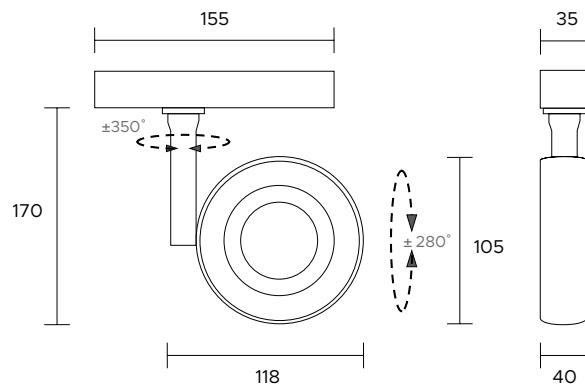

<b>POWER SUPPLY</b>	max 22W - 220V/240V									
<b>CODE</b>	PLA03 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	W - White G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	3000lm (3000°K, 650mA)									
<b>DELIVERED LUMEN OUTPUT</b>	2450lm (3000°K, 650mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	painted aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>										
<b>MOUNTING</b>	ceiling, wall surface									
<b>NOTES</b>	other RAL on request									

# Sirio a



<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	SRA01 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	S <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 3°
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 3°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling)
<b>NOTES</b>	other RAL on request




<b>POWER SUPPLY</b>	max 6W - max 700mA
<b>CODE</b>	SRA02 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N M W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 15° 25° 40°
<b>FINISHES</b>	W - White G - Grey B - Black K - Corten
<b>LUMEN OUTPUT SOURCE</b>	800lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	430lm (3000°K, 700mA, 25°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 0,5 mt FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling)
<b>NOTES</b>	other RAL on request

# Track Lights





# Joy b 48V

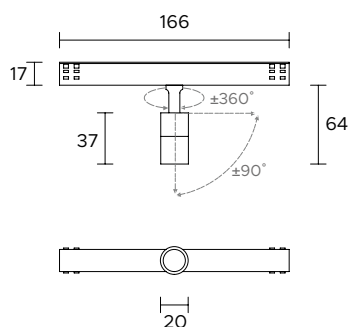


Ideato per binario 48V  
Designed for 48V track



<b>POWER SUPPLY</b>	max 2W - 48V															
<b>CODE</b>	JYB01 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>25°X45°</td> </tr> </table>	N	M	W	X	E						15°	25°	40°	60°	25°X45°
N	M	W	X	E												
15°	25°	40°	60°	25°X45°												
<b>FINISHES</b>	W - White B - Black															
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	145lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	painted aluminium															
<b>DRIVER</b>	included															
<b>POWER CABLE</b>																
<b>MOUNTING</b>	ceiling, wall, bottom up track															

## Joy Twin 48V

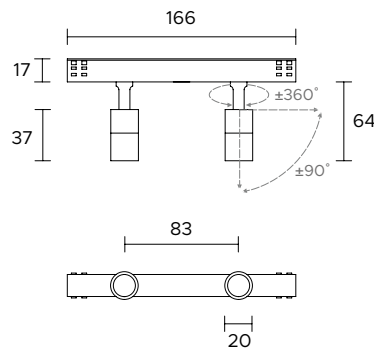


Ideato per binario 48V  
Designed for 48V track



<b>POWER SUPPLY</b>	max 2W x2 - 48V															
<b>CODE</b>	JYT02 ■■■□															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K															
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>25°X45°</td> </tr> </table>	N	M	W	X	E						15°	25°	40°	60°	25°X45°
N	M	W	X	E												
15°	25°	40°	60°	25°X45°												
<b>FINISHES</b>	W - White B - Black															
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA) x2															
<b>DELIVERED LUMEN OUTPUT</b>	145lm (3000°K, 500mA, 40°) x2															
<b>LED NUMBER</b>	2 power LEDs															
<b>MATERIAL</b>	painted aluminium															
<b>DRIVER</b>	included															
<b>POWER CABLE</b>																
<b>MOUNTING</b>	ceiling, wall, bottom up track															

# Joy 3 b 48V




Ideato per binario 48V  
Designed for 48V track



<b>POWER SUPPLY</b>	max 3W - 48V												
<b>CODE</b>	JYB03 ■■■												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>E</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°X17°</td> </tr> </table>	N	M	W	E					15°	25°	30°	40°X17°
N	M	W	E										
15°	25°	30°	40°X17°										
<b>FINISHES</b>	W - White B - Black												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	290lm (3000°K, 350mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	painted aluminium												
<b>DRIVER</b>	included												
<b>POWER CABLE</b>													
<b>MOUNTING</b>	ceiling, wall, bottom up track												

## Joy 3 Twin 48V

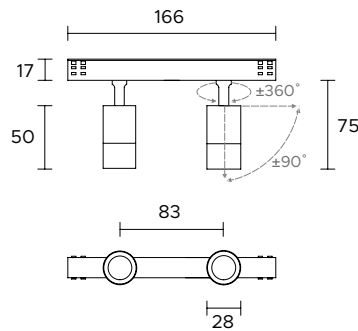


Ideato per binario 48V  
Designed for 48V track



<b>POWER SUPPLY</b>	max 3W x2 - 48V												
<b>CODE</b>	JYT03 ■■■												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="1"> <thead> <tr> <th>N</th> <th>M</th> <th>W</th> <th>E</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>40°x17°</td> </tr> </tbody> </table>	N	M	W	E					15°	25°	30°	40°x17°
N	M	W	E										
15°	25°	30°	40°x17°										
<b>FINISHES</b>	W - White B - Black												
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA) x2												
<b>DELIVERED LUMEN OUTPUT</b>	290lm (3000°K, 350mA, 30°) x2												
<b>LED NUMBER</b>	6 power LEDs												
<b>MATERIAL</b>	painted aluminium												
<b>DRIVER</b>	included												
<b>POWER CABLE</b>													
<b>MOUNTING</b>	ceiling, wall, bottom up track												



# Joy Zoom b 48V

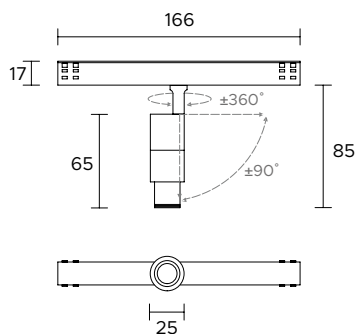

Ideato per binario 48V  
Designed for 48V track




Joy Zoom optic is focusable from 8° to 45°



<b>POWER SUPPLY</b>	max 4W - 48V
<b>CODE</b>	JZB01 <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	8°>45°
<b>FINISHES</b>	B - Black
<b>LUMEN OUTPUT SOURCE</b>	400lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	300lm (3000°K, 350mA)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	anodized aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall, bottom up track

# Sirio b 48V




Designed for 48V track



<b>POWER SUPPLY</b>	max 3W - max 48V
<b>CODE</b>	SR481 ■■■
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	S 3°
<b>FINISHES</b>	W - White B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 3°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall, bottom up track

<b>POWER SUPPLY</b>	max 6W - max 48V
<b>CODE</b>	SR483 ■■■
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N M W 15° 25° 40°
<b>FINISHES</b>	W - White B - Black
<b>LUMEN OUTPUT SOURCE</b>	800lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	430lm (3000°K, 700mA, 25°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall, bottom up track

# Sirio Twin 48V

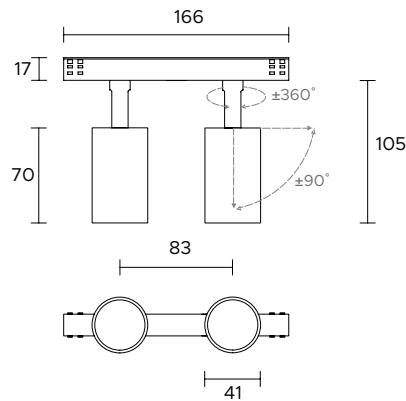


Designed for 48V track



<b>POWER SUPPLY</b>	max 3W x2 - max 48V
<b>CODE</b>	SR482 ■■■ □
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	S 3°
<b>FINISHES</b>	W - White B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA) x2
<b>DELIVERED LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 3°) x2
<b>LED NUMBER</b>	2 power LEDs
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall, bottom up track

<b>POWER SUPPLY</b>	max 6W x2 - max 48V
<b>CODE</b>	SR484 ■■■ □
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N M W 15° 25° 40°
<b>FINISHES</b>	W - White B - Black
<b>LUMEN OUTPUT SOURCE</b>	800lm (3000°K, 700mA) x2
<b>DELIVERED LUMEN OUTPUT</b>	430lm (3000°K, 700mA, 25°) x2
<b>LED NUMBER</b>	2 power LEDs multichip
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall, bottom up track


## Sirio b



Designed for 240V track




A A+ A++



A A+ A++

<b>POWER SUPPLY</b>	max 3W - 220V/240V
<b>CODE</b>	SRB01 ■■■ □
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K

<b>OPTICS</b>	 3°
---------------	---

<b>FINISHES</b>	W - White B - Black
-----------------	------------------------

<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
----------------------------	-----------------------

<b>DELIVERED LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 3°)
-------------------------------	---------------------------

<b>LED NUMBER</b>	1 power LED
-------------------	-------------

<b>MATERIAL</b>	painted aluminium
-----------------	-------------------

<b>DRIVER</b>	included
---------------	----------

<b>POWER CABLE</b>	
--------------------	--

<b>MOUNTING</b>	ceiling, wall track
-----------------	---------------------

<b>POWER SUPPLY</b>	max 6W - 220V/240V
<b>CODE</b>	SRB02 ■■■ □
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K

<b>OPTICS</b>	 15° 25° 40°
---------------	--

<b>FINISHES</b>	W - White B - Black
-----------------	------------------------

<b>LUMEN OUTPUT SOURCE</b>	800lm (3000°K, 700mA)
----------------------------	-----------------------

<b>DELIVERED LUMEN OUTPUT</b>	430lm (3000°K, 700mA, 25°)
-------------------------------	----------------------------



<b>LED NUMBER</b>	1 power LED multichip
-------------------	-----------------------

<b>MATERIAL</b>	painted aluminium
-----------------	-------------------


<b>DRIVER</b>	included
---------------	----------

<b>MOUNTING</b>	ceiling, wall track
-----------------	---------------------

# Palco 50

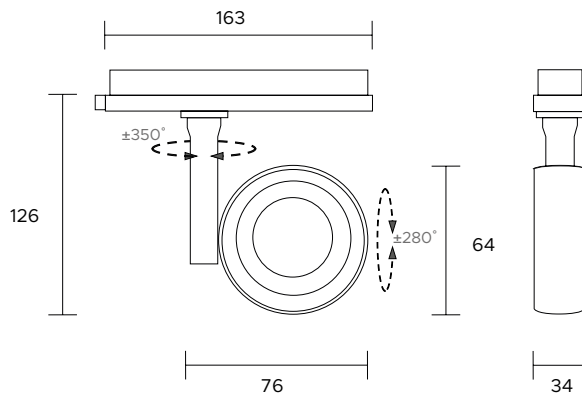


Designed for 240V track




<b>POWER SUPPLY</b>	max 11W - 220V/240V
<b>CODE</b>	PLC01 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N M W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 15° 30° 45°
<b>FINISHES</b>	W - White B - Black
<b>LUMEN OUTPUT SOURCE</b>	1485lm (3000°K, 300mA)
<b>DELIVERED LUMEN OUTPUT</b>	1170lm (3000°K, 300mA, 45°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall track



# Palco 70

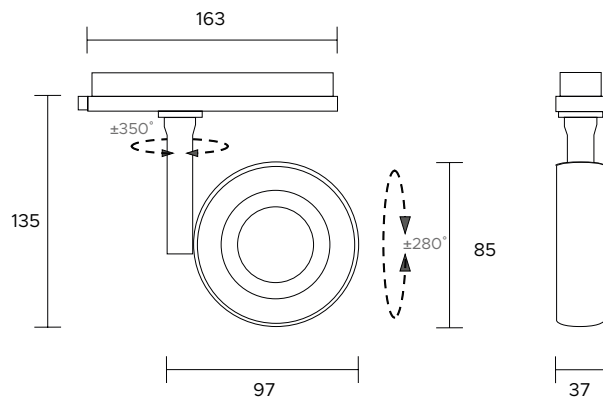


Designed for 240V track




<b>POWER SUPPLY</b>	max 16W - 220V/240V									
<b>CODE</b>	PLC02 ■■■									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	W - White B - Black									
<b>LUMEN OUTPUT SOURCE</b>	2230lm (3000°K, 450mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1920lm (3000°K, 450mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	painted aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>										
<b>MOUNTING</b>	ceiling, wall track									

# Palco 90


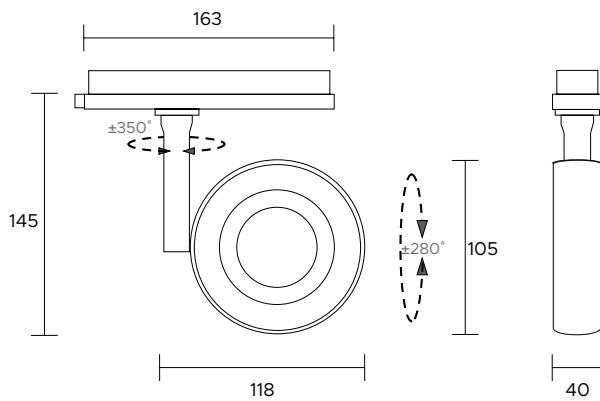


Designed for 240V track




<b>POWER SUPPLY</b>	max 22W - 220V/240V									
<b>CODE</b>	PLC03 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	W - White B - Black									
<b>LUMEN OUTPUT SOURCE</b>	3000lm (3000°K, 650mA)									
<b>DELIVERED LUMEN OUTPUT</b>	2450lm (3000°K, 650mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	painted aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>										
<b>MOUNTING</b>	ceiling, wall track									

## Sharp b

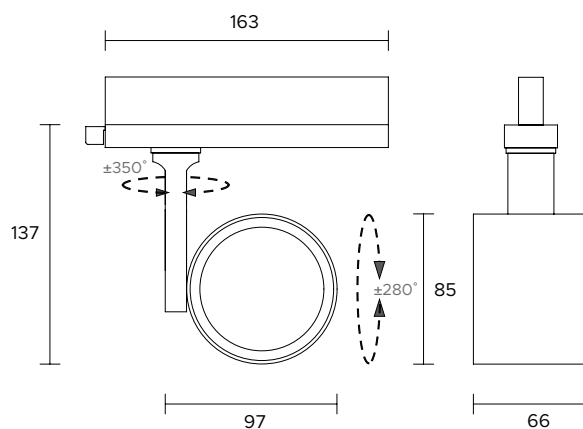

Designed for 240V track



<b>POWER SUPPLY</b>	max 18W - 220V/240V
<b>CODE</b>	SRPB1 ■■■
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N 10°
<b>FINISHES</b>	W - White B - Black
<b>LUMEN OUTPUT SOURCE</b>	2550lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	1800lm (3000°K, 500mA, 10°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>MOUNTING</b>	ceiling, wall track




# Linear Lights





# Pictor 5

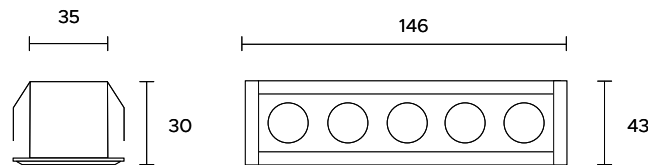


36x140 mm



<b>POWER SUPPLY</b>	max 5W - max 350mA
<b>CODE</b>	PIC05
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>
<b>OPTICS</b>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>N 12°</p> </div> <div style="text-align: center;"> <p>M 35°</p> </div> <div style="text-align: center;"> <p>W 50°</p> </div> </div>
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>W - White</li> <li>G - Grey</li> <li>B - Black</li> </ul>
<b>LUMEN OUTPUT SOURCE</b>	550lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	510lm (3000°K, 350mA, 50°)
<b>LED NUMBER</b>	5 power LEDs
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	included 0,50 mt. FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall)
<b>NOTES</b>	<ul style="list-style-type: none"> <li>other RAL on request</li> <li>10W - 500mA on request</li> </ul>

# Pictor 10

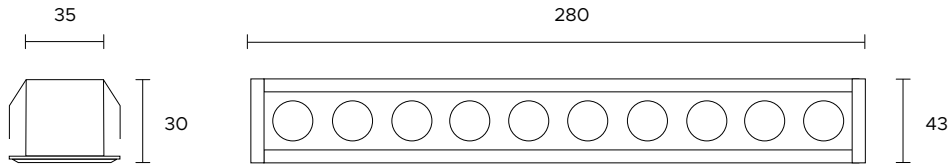


36x274 mm




<b>POWER SUPPLY</b>	max 10W - max 350mA									
<b>CODE</b>	PIC10 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>									
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>									
<b>OPTICS</b>	<table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">N</td> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">12°</td> <td style="text-align: center;">35°</td> <td style="text-align: center;">50°</td> </tr> </table>	N	M	W				12°	35°	50°
N	M	W								
12°	35°	50°								
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>W - White</li> <li>G - Grey</li> <li>B - Black</li> </ul>									
<b>LUMEN OUTPUT SOURCE</b>	1100lm (3000°K, 350mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1030lm (3000°K, 350mA, 50°)									
<b>LED NUMBER</b>	10 power LEDs									
<b>MATERIAL</b>	painted aluminium									
<b>DRIVER</b>	not included, see pag. 322 and 326									
<b>POWER CABLE</b>	included 0,50 mt. FEP 2 x 0,35 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling, wall)									
<b>NOTES</b>	<ul style="list-style-type: none"> <li>other RAL on request</li> <li>20W - 500mA on request</li> </ul>									

# Pictor a 5

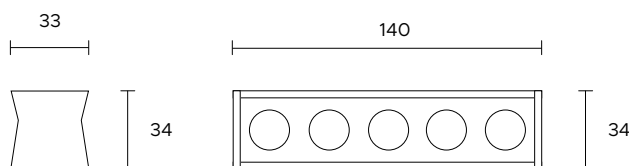

<b>POWER SUPPLY</b>	max 5W - max 350mA
<b>CODE</b>	PIA05 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	<input checked="" type="checkbox"/> C - Cool white 5500°K <input type="checkbox"/> N - Natural white 4000°K <input type="checkbox"/> W - Warm white 3000°K <input type="checkbox"/> H - Warm white 3000°K - CRI90 <input type="checkbox"/> Y - Warm white 2700°K <input type="checkbox"/> A - Amber <input type="checkbox"/> R - Red <input type="checkbox"/> G - Green <input type="checkbox"/> B - Blue
<b>OPTICS</b>	<input type="checkbox"/> N <input type="checkbox"/> M <input type="checkbox"/> W <input checked="" type="checkbox"/> 12° <input type="checkbox"/> 35° <input type="checkbox"/> 50°
<b>FINISHES</b>	<input type="checkbox"/> W - White <input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	550lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	510lm (3000°K, 350mA, 50°)
<b>LED NUMBER</b>	5 power LEDs
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	included 0,50 mt. FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall)
<b>NOTES</b>	other RAL on request

## Pictor a 10

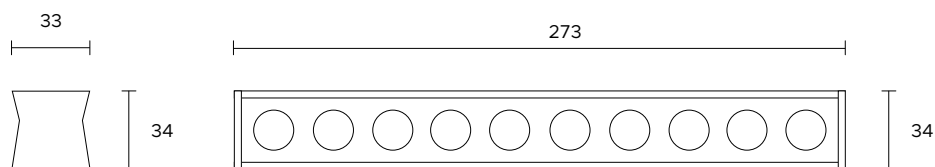

<b>POWER SUPPLY</b>	max 10W - max 350mA
<b>CODE</b>	PIA10 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	<input checked="" type="checkbox"/> C - Cool white 5500°K <input type="checkbox"/> N - Natural white 4000°K <input type="checkbox"/> W - Warm white 3000°K <input type="checkbox"/> H - Warm white 3000°K - CRI90 <input type="checkbox"/> Y - Warm white 2700°K <input type="checkbox"/> A - Amber <input type="checkbox"/> R - Red <input type="checkbox"/> G - Green <input type="checkbox"/> B - Blue
<b>OPTICS</b>	<input type="checkbox"/> N <input type="checkbox"/> M <input type="checkbox"/> W <input checked="" type="checkbox"/> 12° <input type="checkbox"/> 35° <input type="checkbox"/> 50°
<b>FINISHES</b>	<input type="checkbox"/> W - White <input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	1100lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	1030lm (3000°K, 350mA, 50°)
<b>LED NUMBER</b>	10 power LEDs
<b>MATERIAL</b>	painted aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	included 0,50 mt. FEP 2 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall)
<b>NOTES</b>	other RAL on request




Indoor - Linear lights



# Projectors



# Vision

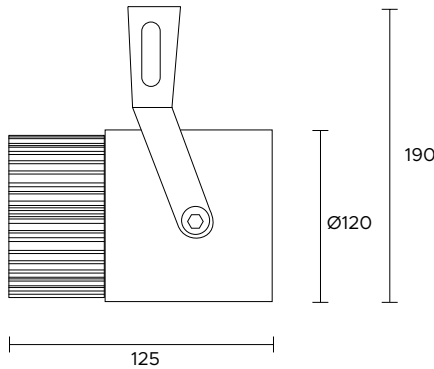


<b>POWER SUPPLY</b>	max 30W - max 900mA
<b>CODE</b>	VIS30 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input type="checkbox"/> N 20° <input type="checkbox"/> W 35° <input type="checkbox"/> X 50°
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	4560lm (3000°K, 900mA)
<b>DELIVERED LUMEN OUTPUT</b>	3930lm (3000°K, 900mA, 35°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and flange in anodized or painted aluminium
<b>DRIVER</b>	not included, see pag. 326
<b>POWER CABLE</b>	includes 0,5 mt Liyy 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall)
<b>NOTE</b>	other RAL on request

<b>POWER SUPPLY</b>	max 50W - max 1400mA
<b>CODE</b>	VIS50 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input type="checkbox"/> N 20° <input type="checkbox"/> W 35° <input type="checkbox"/> X 50°
<b>FINISHES</b>	W - White G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	7080lm (3000°K, 1400mA)
<b>DELIVERED LUMEN OUTPUT</b>	5780lm (3000°K, 1400mA, 35°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and flange in anodized or painted aluminium
<b>DRIVER</b>	not included, see pag. 325 and 326
<b>POWER CABLE</b>	includes 1,5 mt Liyy 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall)
<b>NOTE</b>	other RAL on request





The outdoor LED luminaires combine reliability, aesthetics, functionality and visual comfort. Carefully executed and built to last over time and ensure effective installation in any type of environment, even the most extreme. They offer maximum flexibility of use: different shapes, sizes and powers, to illuminate large surfaces, such as facades and gardens, or to enhance architectural and landscape details.

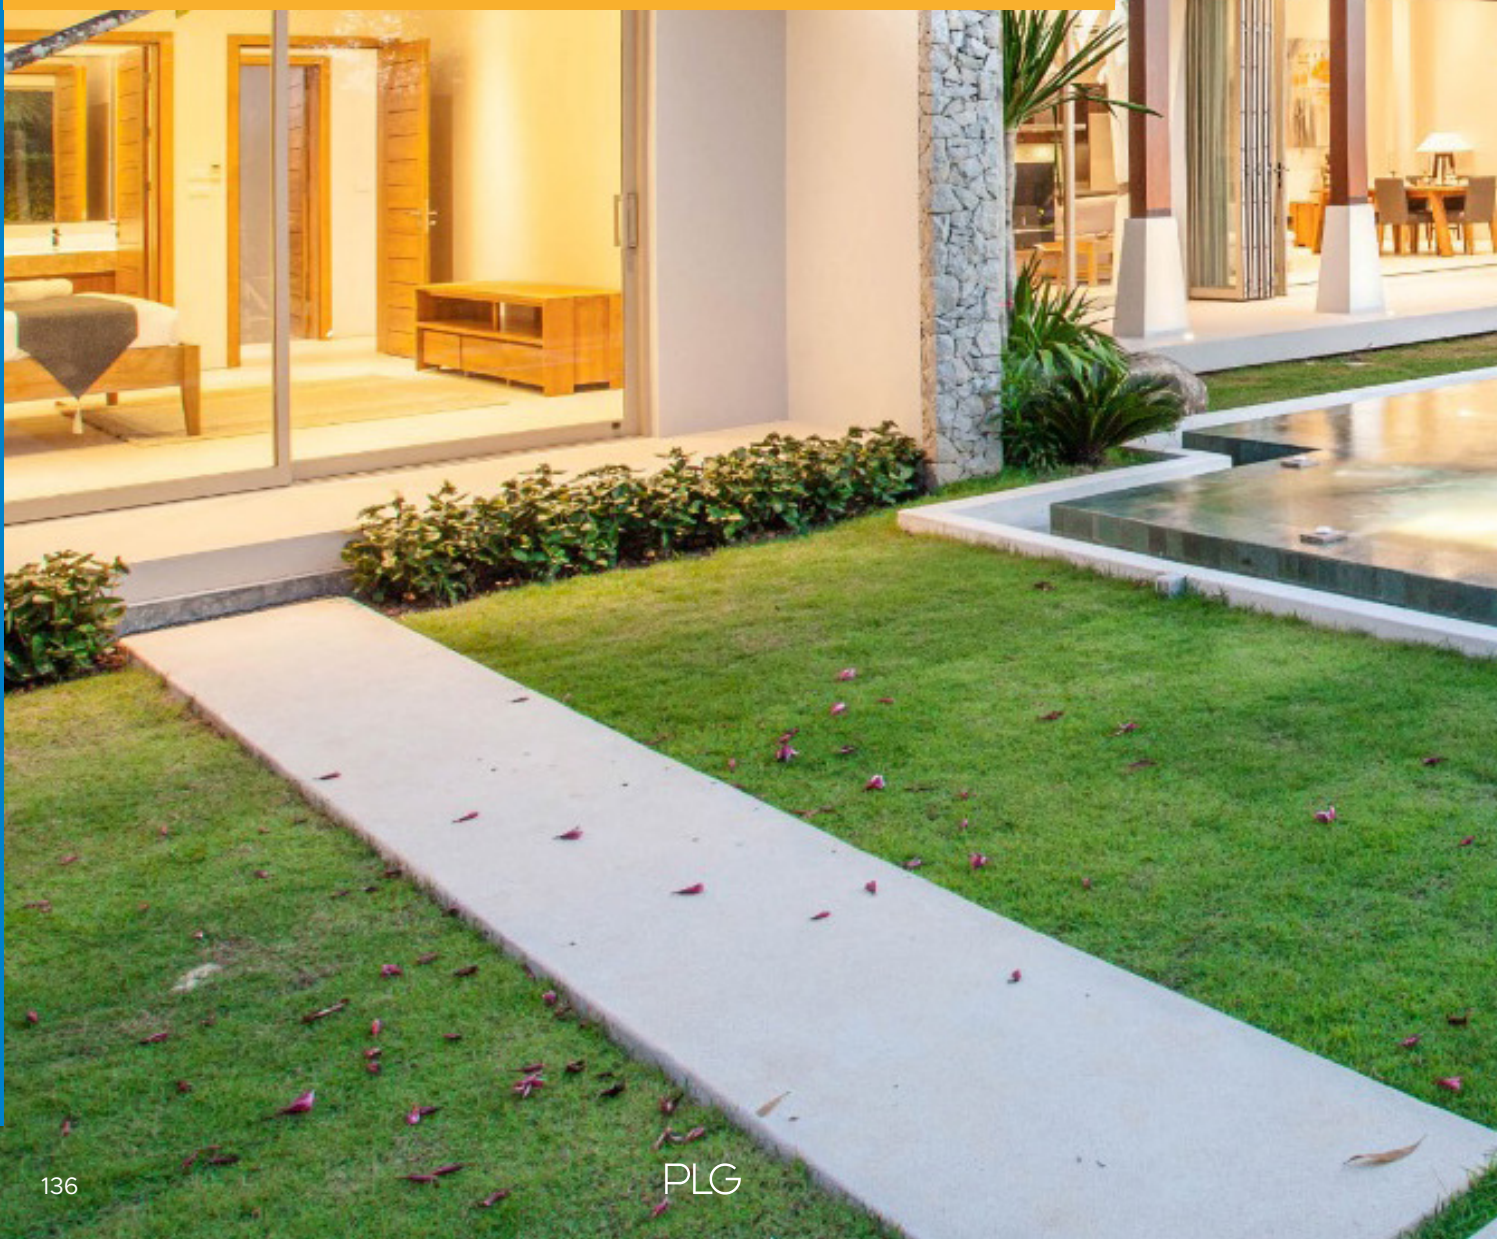





# Outdoor

Gli apparecchi LED per esterno a marchio PLG coniugano affidabilità estetica, funzionalità e comfort visivo. Sono attentamente progettati e costruiti per durare nel tempo e per garantire un'efficace installazione in qualsiasi tipologia di ambiente, anche il più estremo.

I dispositivi PLG per esterno si caratterizzano per la massima flessibilità d'uso: forme, dimensioni e potenze diverse permettono di illuminare superfici di grandi dimensioni, come facciate e giardini, o di valorizzare dettagli architettonici e paesaggistici.

La giusta luce, dove serve e nell'esatta quantità per la massima valorizzazione di spazi e oggetti.



Spotlights  
Colibri  
pag. 145



Spotlights  
Spot 3  
pag. 146



Spotlights  
Spot 4  
pag. 147



Spotlights  
Spot 6  
pag. 148



Spotlights  
Spot 9  
pag. 149



Spotlights  
Spot 12  
pag. 150



Spotlights  
Micro Nexus  
pag. 151



Spotlights  
Micro Nexus 3  
pag. 152



Spotlights  
Mini Nexus  
pag. 153



Spotlights  
Nexus 3  
pag. 154



Spotlights  
Nexus 4  
pag. 155



Spotlights  
Nexus 6  
pag. 156



Spotlights  
Nexus 9  
pag. 157



Spotlights  
Nexus 12  
pag. 158



Spotlights  
Nexus 18  
pag. 159



Spotlights  
Nexus 3 240V  
pag. 160



Spotlights  
Nexus 6 240V  
pag. 161



Spotlights  
Nexus 9 240V  
pag. 162



Spotlights  
Nexus 12 240V  
pag. 163



Spotlights  
Nexus 18 240V  
pag. 164



Spotlights  
Dot  
pag. 165



Spotlights  
Sirio pr  
pag. 166



Spotlights  
Quark 10  
pag. 167



Spotlights  
Quark 20  
pag. 168





Spotlights  
Quark 30  
pag. 169



Spotlights  
Icon  
pag. 170



Spotlights  
Icon 2  
pag. 171



Inox spotlights  
Microspot  
pag. 173



Inox spotlights  
Colibri inox  
pag. 174



Inox spotlights  
Sirio inox  
pag. 175



Inox spotlights  
Dodo  
pag. 176



Inox spotlights  
Ibis  
pag. 177



Inox spotlights  
Emu  
pag. 178



Accessories  
pag. 179 - 180



Architectural Lights  
Arco  
pag. 183



Architectural Lights  
Arco in  
pag. 184



Architectural Lights  
Arco pr  
pag. 185



Floor Recessed  
Tiny  
pag. 187



Floor Recessed  
Tiny Inox  
pag. 188



Floor Recessed  
Sigma  
pag. 189



Floor Recessed  
Sigma inox  
pag. 190



Floor Recessed  
Sigma square  
pag. 191



Floor Recessed  
Venus  
pag. 192



Floor Recessed  
Venus square  
pag. 193



Floor Recessed  
Galaxy  
pag. 194



Floor Recessed  
Pluto  
pag. 195



Floor Recessed  
Pluto ar  
pag. 196



Floor Recessed  
Sirio in  
pag. 197



Floor Recessed  
Orion in  
pag. 198



Floor Recessed  
Asy in  
pag. 199



Floor Recessed  
Mira 6  
pag. 200




Floor Recessed  
Mira 12  
pag. 201



Floor Recessed  
Mira 20  
pag. 202



Floor Recessed  
Moon  
pag. 203



Floor Recessed  
Pluto adj  
pag. 204



Floor Recessed  
Sirio in adj  
pag. 205



Floor Recessed  
Orion in adj  
pag.206



Floor Recessed  
Eris adj  
pag. 207



Floor Recessed  
Atlas adj  
pag. 208



Floor Recessed  
Uranus adj  
pag. 209



Floor Recessed  
Saturn adj  
pag. 210



Grazing Lights  
Jolly  
pag. 213



Grazing Lights  
Jolly h  
pag. 214



Grazing Lights  
Jolly inox  
pag. 215



Grazing Lights  
Jolly square  
pag. 216



Grazing Lights  
Alpha  
pag. 217



Ceiling recessed  
Tiny  
pag. 219



Ceiling recessed  
Tiny inox  
pag. 220



Ceiling recessed  
Sigma  
pag. 221



Ceiling recessed  
Sigma inox  
pag. 222



Ceiling recessed  
Sigma square  
pag. 223



Ceiling recessed  
Venus  
pag. 224



Ceiling recessed  
Venus square  
pag. 225



Ceiling recessed  
Galaxy  
pag. 226



Ceiling recessed  
Pluto  
pag. 227



Ceiling recessed  
Pluto ar  
pag. 228



Ceiling recessed  
Mira 6  
pag. 229



Ceiling recessed  
Mira 12  
pag. 230



Wall Recessed  
Tiny plex  
pag. 233



Wall Recessed  
Dock  
pag. 234



Wall Recessed  
Dahlia  
pag. 235



Wall Recessed  
Daisy  
pag. 236



Wall Recessed  
Circle  
pag. 237



Wall Recessed  
Evo  
pag. 238



Wall Recessed  
Gamma  
pag. 239



Wall Recessed  
Gamma square  
pag. 240



Wall Recessed  
Brio  
pag. 241 - 242



Wall Recessed  
Brio square  
pag. 243 - 244



Wall Recessed  
Gemma  
pag. 245



Wall Recessed  
Wind  
pag. 246



Wall Recessed  
Wind square  
pag. 246



Wall Surface  
Gianus  
pag. 249



Linear Lights  
Strip 6  
pag. 251



Linear Lights  
Strip 12  
pag. 252



Linear Lights  
Strip 18  
pag. 253



Linear Lights  
Strip 24  
pag. 254



Linear Lights  
Strip 36  
pag. 255








# Spotlights





# Colibrì




<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	CB001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	<p>C - Cool white 5500°K                      N - Natural white 4000°K                      W - Warm white 3000°K                      H - Warm white 3000°K - CRI90                      Y - Warm white 2700°K                      A - Amber                      R - Red                      G - Green                      B - Blue</p>
<b>OPTICS</b>	<p>N M W X T D                        10° 25° 40° 60° 110° Diff.</p>
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	24V version on request

## Spot 3



A A+ A++


<b>POWER SUPPLY</b>	max 6W - max 500mA																		
<b>CODE</b>	SP003 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	420lm (3000°K, 500mA, 40°)																		
<b>LED NUMBER</b>	3 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 323 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>	24V version on request																		



A A+ A++

<b>POWER SUPPLY</b>	max 9W - max 700mA																		
<b>CODE</b>	SP003 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>																		
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	390lm (RGB, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	360lm (RGB, 700mA, 40°)																		
<b>LED NUMBER</b>	3 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 329																		
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>																			



# Spot 4



<b>POWER SUPPLY</b>	max 8W - max 500mA															
<b>CODE</b>	SP004 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>															
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>															
<b>OPTICS</b>	<table style="width: 100%; text-align: center;"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						10°	25°	40°	110°	Diff.
N	M	W	T	D												
10°	25°	40°	110°	Diff.												
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>G - Grey</li> <li>B - Black</li> </ul>															
<b>LUMEN OUTPUT SOURCE</b>	600lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	550lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	4 power LEDs															
<b>MATERIAL</b>	body and flange in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 323															
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (ceiling, wall, floor)															
<b>ACCESSORIES</b>	see pag. 179 - 180															
<b>NOTES</b>	24V version on request															




## Spot 6



A A+ A++




<b>POWER SUPPLY</b>	max 12W - max 500mA																		
<b>CODE</b>	SP006 ■■■□																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	900lm (3000°K, 500mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	860lm (3000°K, 500mA, 40°)																		
<b>LED NUMBER</b>	6 power LEDs																		
<b>MATERIAL</b>	body in and flange anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 323 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>	24V version on request																		



A A+ A++

<b>POWER SUPPLY</b>	max 18W - max 700mA																		
<b>CODE</b>	SP006 ■■■□																		
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	780lm (RGB, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	720lm (RGB, 700mA, 40°)																		
<b>LED NUMBER</b>	6 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 329																		
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		



# Spot 9



<b>POWER SUPPLY</b>	max 18W - max 500mA
<b>CODE</b>	SP009 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input type="checkbox"/> N 10° <input type="checkbox"/> M 25° <input type="checkbox"/> W 40° <input type="checkbox"/> X 60° <input type="checkbox"/> T 110° <input type="checkbox"/> D Diff.
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	1350lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	1300lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	9 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	

<b>POWER SUPPLY</b>	max 27W - max 700mA
<b>CODE</b>	SP009 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W
<b>OPTICS</b>	<input type="checkbox"/> N 10° <input type="checkbox"/> M 25° <input type="checkbox"/> W 40° <input type="checkbox"/> X 60° <input type="checkbox"/> T 110° <input type="checkbox"/> D Diff.
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	1170lm (RGB, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	1080lm (RGB, 700mA, 40°)
<b>LED NUMBER</b>	9 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 329
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	

## Spot 12



A A+ A++


<b>POWER SUPPLY</b>	max 24W - max 500mA
<b>CODE</b>	SP012 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> N 10° M 25° W 40° X 60° T 110° D Diff.
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	1800lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	1690lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	12 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	24V version on request



A A+ A++

<b>POWER SUPPLY</b>	max 36W - max 700mA
<b>CODE</b>	SP012 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W
<b>OPTICS</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> N 10° M 25° W 40° X 60° T 110° D Diff.
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	1560lm (RGB, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	1440lm (RGB, 700mA, 40°)
<b>LED NUMBER</b>	12 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 329
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180


# Micro Nexus



<b>POWER SUPPLY</b>	max 3W - max 700mA																		
<b>CODE</b>	MCNX1 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">□</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 324 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>	24V version on request																		






## Micro Nexus 3



<b>POWER SUPPLY</b>	max 3W - max 350mA															
<b>CODE</b>	MCNX3 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>															
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>															
<b>OPTICS</b>	<table style="width: 100%; text-align: center;"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						15°	25°	30°	110°	Diff.
N	M	W	T	D												
15°	25°	30°	110°	Diff.												
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>G - Grey</li> <li>B - Black</li> </ul>															
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)															
<b>LED NUMBER</b>	3 power LEDs															
<b>MATERIAL</b>	body and flange in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST- UV 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (ceiling, wall, floor)															
<b>ACCESSORIES</b>	see pag. 179 - 180															
<b>NOTES</b>	24V version on request															




# Mini Nexus

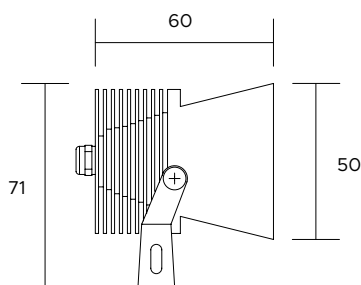

<b>POWER SUPPLY</b>	max 3W - max 350mA
<b>CODE</b>	MNX03 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 15° 25° 40° 110° Diff.
<b>FINISHES</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	260lm (3000°K, 350mA, 40°)
<b>LED NUMBER</b>	3 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	24V version on request

<b>POWER SUPPLY</b>	max 9W - max 700mA
<b>CODE</b>	MNX03 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W
<b>OPTICS</b>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 15° 25° 40° 110° Diff.
<b>FINISHES</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	290lm (RGB, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	230lm (RGB, 700mA, 40°)
<b>LED NUMBER</b>	3 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 329
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	


# Nexus 3

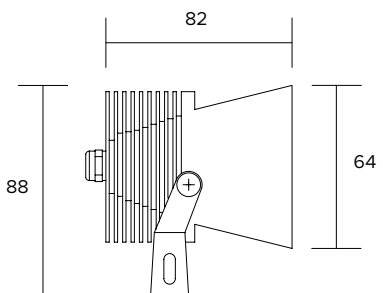

<b>POWER SUPPLY</b>	max 6W - max 500mA																		
<b>CODE</b>	NX003 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	420lm (3000°K, 500mA, 40°)																		
<b>LED NUMBER</b>	3 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 323 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>	24V version on request																		

<b>POWER SUPPLY</b>	max 9W - max 700mA																		
<b>CODE</b>	NX003 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>																		
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	390lm (RGB, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	360lm (RGB, 700mA, 40°)																		
<b>LED NUMBER</b>	3 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 329																		
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		



# Nexus 4

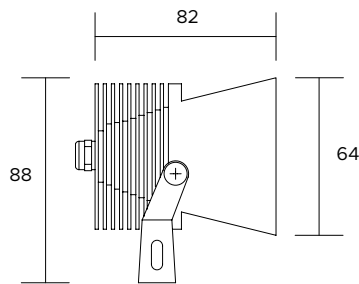


<b>POWER SUPPLY</b>	max 8W - max 500mA															
<b>CODE</b>	NX004 ■■■□															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						10°	25°	40°	110°	Diff.
N	M	W	T	D												
10°	25°	40°	110°	Diff.												
<b>FINISHES</b>	G - Grey B - Black															
<b>LUMEN OUTPUT SOURCE</b>	600lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	550lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	4 power LEDs															
<b>MATERIAL</b>	body and flange in anodized aluminium															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (ceiling, wall, floor)															
<b>ACCESSORIES</b>	see pag. 179 - 180															
<b>NOTES</b>	24V version on request															



# Nexus 6

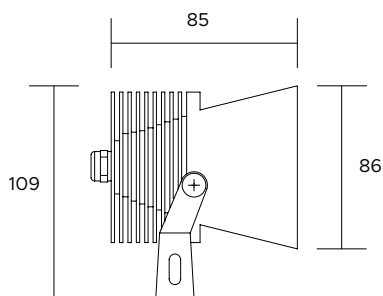

A A+ A++



A A+ A++

**POWER SUPPLY** max 12W - max 500mA

**CODE** NX006 ■ ■ ■

**LED COLOUR**  
 C - Cool white 5500°K  
 N - Natural white 4000°K  
 W - Warm white 3000°K  
 H - Warm white 3000°K - CR190  
 Y - Warm white 2700°K  
 A - Amber  
 R - Red  
 G - Green  
 B - Blue

**OPTICS**  
 N M W X T D  
 10° 25° 40° 60° 110° Diff.

**FINISHES**  
 G - Grey  
 B - Black

**LUMEN OUTPUT SOURCE** 900lm (3000°K, 500mA)

**DELIVERED LUMEN OUTPUT** 860lm (3000°K, 500mA, 40°)

**LED NUMBER** 6 power LEDs

**MATERIAL** body and flange in anodized aluminium

**DRIVER** not included, see pag. 323 and 326

**POWER CABLE** includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable

**WIRING** in series

**MOUNTING** surface (ceiling, wall, floor)

**ACCESSORIES** see pag. 179 - 180

**NOTES** 24V version on request

max 18W - max 700mA

NX006 ■ ■ ■

1 - RGB  
 2 - AWB  
 3 - A WW W

N M W X T D  
 10° 25° 40° 60° 110° Diff.

G - Grey  
 B - Black

780lm (RGB, 700mA)

720lm (RGB, 700mA, 40°)

6 power LEDs

body and flange in anodized aluminium

not included, see pag. 329




includes 1,5 mt Liyy-AD8 6 x 0,35 cable

in series

surface (ceiling, wall, floor)

see pag. 179 - 180




# Nexus 9

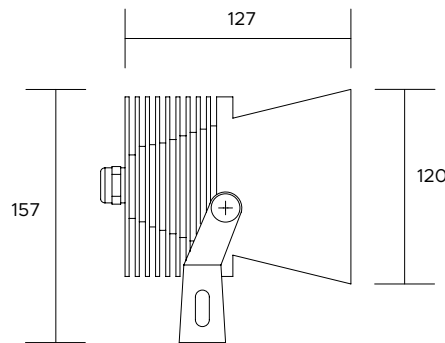

<b>POWER SUPPLY</b>	max 18W - max 500mA
<b>CODE</b>	NX009 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input type="checkbox"/> N 10° <input type="checkbox"/> M 25° <input type="checkbox"/> W 40° <input type="checkbox"/> X 60° <input type="checkbox"/> T 110° <input type="checkbox"/> D Diff.
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	1350lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	1300lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	9 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	24V version on request

<b>POWER SUPPLY</b>	max 27W - max 700mA
<b>CODE</b>	NX009 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W
<b>OPTICS</b>	<input type="checkbox"/> N 10° <input type="checkbox"/> M 25° <input type="checkbox"/> W 40° <input type="checkbox"/> X 60° <input type="checkbox"/> T 110° <input type="checkbox"/> D Diff.
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	1170lm (RGB, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	1080lm (RGB, 700mA, 40°)
<b>LED NUMBER</b>	9 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 329
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180



# Nexus 12

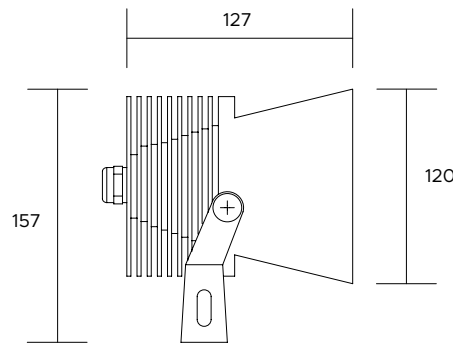


<b>POWER SUPPLY</b>	max 24W - max 500mA																		
<b>CODE</b>	NX012 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	1800lm (3000°K, 500mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	1690lm (3000°K, 500mA, 40°)																		
<b>LED NUMBER</b>	12 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 323 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>	24V version on request																		

<b>POWER SUPPLY</b>	max 36W - max 700mA																		
<b>CODE</b>	NX012 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																		
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	1560lm (RGB, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	1440lm (RGB, 700mA, 40°)																		
<b>LED NUMBER</b>	12 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 329																		
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		

# Nexus 18

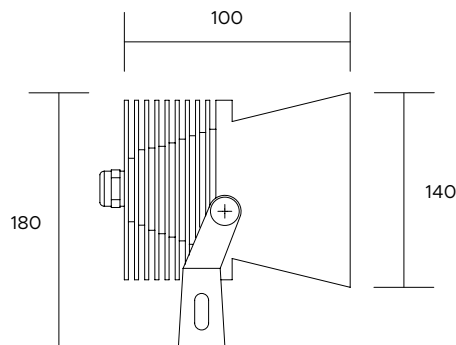

A A+ A++





A A+ A++

<b>POWER SUPPLY</b>	max 18W - max 350mA
<b>CODE</b>	NX018 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input type="checkbox"/> N <input type="checkbox"/> M <input type="checkbox"/> W <input type="checkbox"/> X <input type="checkbox"/> T <input type="checkbox"/> D 10° 25° 40° 60° 110° Diff.
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	1980lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	1400lm (3000°K, 350mA, 40°)
<b>LED NUMBER</b>	18 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	24V version on request

<b>POWER SUPPLY</b>	max 54W - max 700mA
<b>CODE</b>	NX018 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W
<b>OPTICS</b>	<input type="checkbox"/> N <input type="checkbox"/> M <input type="checkbox"/> W <input type="checkbox"/> X <input type="checkbox"/> T <input type="checkbox"/> D 10° 25° 40° 60° 110° Diff.
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	2340lm (RGB, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	2160lm (RGB, 700mA, 40°)
<b>LED NUMBER</b>	18 power LEDs
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 329
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180


# Nexus 3 240V

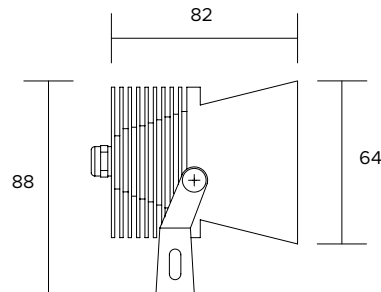

<b>POWER SUPPLY</b>	max 3W - 220V/240V																		
<b>CODE</b>	NXD03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	320lm (3000°K, 350mA, 40°)																		
<b>LED NUMBER</b>	3 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	included																		
<b>POWER CABLE</b>	includes 1,5 mt H05RN -F 3 x 0,75 cable																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>																			




# Nexus 6 240V

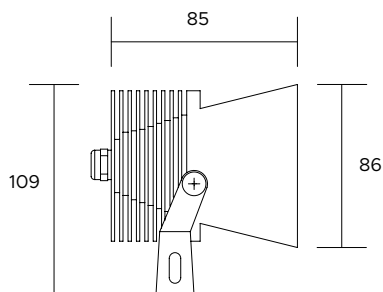



<b>POWER SUPPLY</b>	max 6W - 220V/240V																		
<b>CODE</b>	NXD06 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																		
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>																		
<b>OPTICS</b>	<table style="width: 100%; text-align: center;"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>G - Grey</li> <li>B - Black</li> </ul>																		
<b>LUMEN OUTPUT SOURCE</b>	660lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	640lm (3000°K, 350mA, 40°)																		
<b>LED NUMBER</b>	6 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	included																		
<b>POWER CABLE</b>	includes 1,5 mt H05RN -F 3 x 0,75 cable																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>																			

# Nexus 9 240V

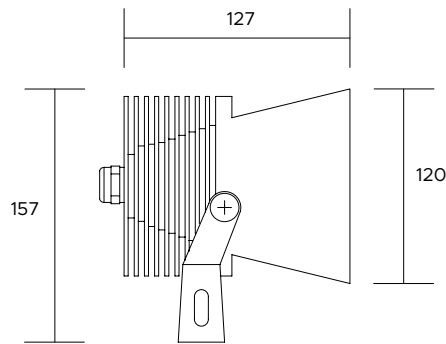


<b>POWER SUPPLY</b>	max 9W - 220V/240V																		
<b>CODE</b>	NXD09 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																		
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>																		
<b>OPTICS</b>	<table style="width: 100%; text-align: center;"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>G - Grey</li> <li>B - Black</li> </ul>																		
<b>LUMEN OUTPUT SOURCE</b>	990lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	960lm (3000°K, 350mA, 40°)																		
<b>LED NUMBER</b>	9 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	included																		
<b>POWER CABLE</b>	includes 1,5 mt H05RN-F 3 x 0,75 cable																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>																			

# Nexus 12 240V

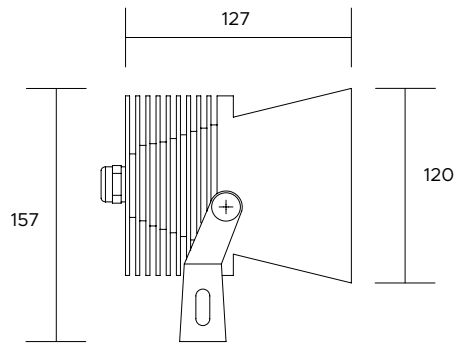


<b>POWER SUPPLY</b>	max 12W - 220V/240V																		
<b>CODE</b>	NXD12 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td><input type="checkbox"/> N</td> <td><input type="checkbox"/> M</td> <td><input type="checkbox"/> W</td> <td><input type="checkbox"/> X</td> <td><input type="checkbox"/> T</td> <td><input type="checkbox"/> D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	<input type="checkbox"/> N	<input type="checkbox"/> M	<input type="checkbox"/> W	<input type="checkbox"/> X	<input type="checkbox"/> T	<input type="checkbox"/> D							10°	25°	40°	60°	110°	Diff.
<input type="checkbox"/> N	<input type="checkbox"/> M	<input type="checkbox"/> W	<input type="checkbox"/> X	<input type="checkbox"/> T	<input type="checkbox"/> D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	1320lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	1280lm (3000°K, 350mA, 40°)																		
<b>LED NUMBER</b>	12 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	included																		
<b>POWER CABLE</b>	includes 1,5 mt H05RN-F 3 x 0,75 cable																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>																			

# Nexus 18 240V

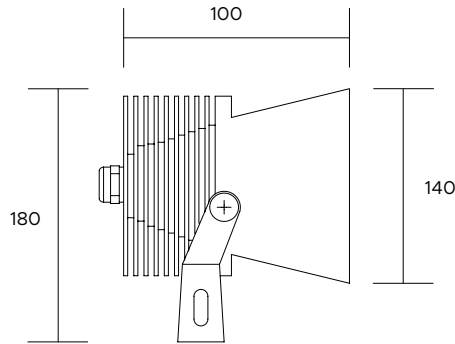

<b>POWER SUPPLY</b>	max 18W - 220V/240V																		
<b>CODE</b>	NXD18 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	1980lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	1400lm (3000°K, 350mA, 40°)																		
<b>LED NUMBER</b>	18 power LEDs																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	included																		
<b>POWER CABLE</b>	includes 1,5 mt H05RN-F 3 x 0,75 cable																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>																			


# Dot



<b>POWER SUPPLY</b>	max 3W - max 700mA																		
<b>CODE</b>	DOT01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 324 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>	24V version on request																		



## Sirio pr



A A+ A++



<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	SPR01 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input type="checkbox"/> 3°
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 3°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	24V version on request



A A+ A++


<b>POWER SUPPLY</b>	max 6W - max 700mA
<b>CODE</b>	SPR02 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input type="checkbox"/> 15° 25° 40°
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	800lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	430lm (3000°K, 700mA, 25°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	24V version on request

# Quark 10

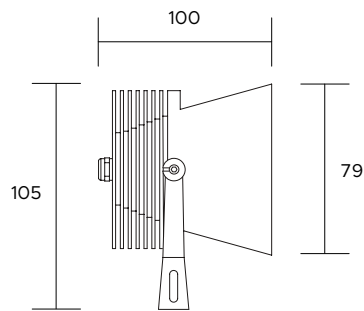


<b>POWER SUPPLY</b>	max 10W - 220V/240V									
<b>CODE</b>	QRK10 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	1260lm (3000°K, 250mA)									
<b>DELIVERED LUMEN OUTPUT</b>	830lm (3000°K, 250mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body and flange in anodized aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>	includes 1,5 mt H05RN-F 3 x 0,75 cable									
<b>MOUNTING</b>	surface (ceiling, wall, floor)									
<b>ACCESSORIES</b>	see pag. 179 - 180									
<b>NOTES</b>										

# Quark 20





<b>POWER SUPPLY</b>	max 20W - 220V/240V									
<b>CODE</b>	QRK20 <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	2480lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1940lm (3000°K, 500mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body and flange in anodized aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>	includes 1,5 mt H05RN-F 3 x 0,75 cable									
<b>MOUNTING</b>	surface (ceiling, wall, floor)									
<b>ACCESSORIES</b>	see pag. 179 - 180									
<b>NOTES</b>										

# Quark 30

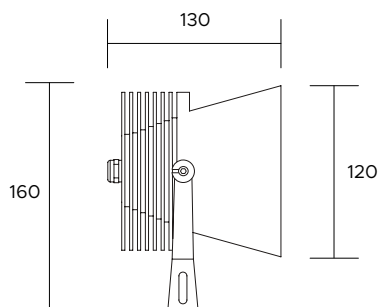


<b>POWER SUPPLY</b>	max 30W - 220V/240V									
<b>CODE</b>	QRK30 ■ ■ □									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	3220lm (3000°K, 700mA)									
<b>DELIVERED LUMEN OUTPUT</b>	2970lm (3000°K, 700mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body and flange in anodized aluminium									
<b>DRIVER</b>	included									
<b>POWER CABLE</b>	includes 1,5 mt H05RN-F 3 x 0,75 cable									
<b>MOUNTING</b>	surface (ceiling, wall, floor)									
<b>ACCESSORIES</b>	see pag. 179 - 180									
<b>NOTES</b>										

# Icon

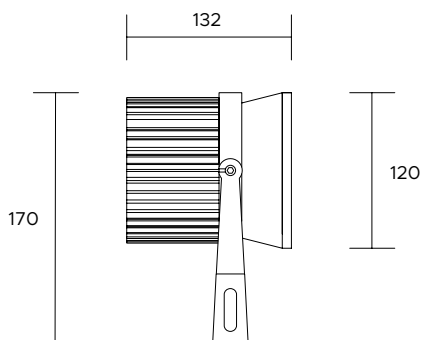

A A+ A++





A A+ A++

<b>POWER SUPPLY</b>	max 30W - max 900mA
<b>CODE</b>	ICN01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<span style="border: 1px solid black; padding: 2px;">M</span> <span style="border: 1px solid black; padding: 2px;">W</span> <span style="border: 1px solid black; padding: 2px;">X</span> 20° 35° 50°
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	4560lm (3000°K, 900mA)
<b>DELIVERED LUMEN OUTPUT</b>	3930lm (3000°K, 900mA, 35°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	

<b>POWER SUPPLY</b>	max 50W - max 1400mA
<b>CODE</b>	ICN01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: black;">■</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<span style="border: 1px solid black; padding: 2px;">M</span> <span style="border: 1px solid black; padding: 2px;">W</span> <span style="border: 1px solid black; padding: 2px;">X</span> 20° 35° 50°
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	7080lm (3000°K, 1400mA)
<b>DELIVERED LUMEN OUTPUT</b>	5780lm (3000°K, 1400mA, 35°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 325 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	



# Icon 2

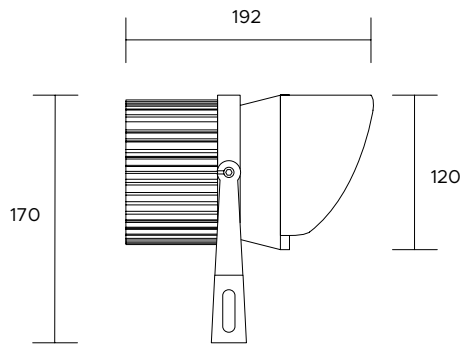


<b>POWER SUPPLY</b>	max 30W - max 900mA									
<b>CODE</b>	ICNO2 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> </tr> </table>	M	W	X				20°	35°	50°
M	W	X								
20°	35°	50°								
<b>FINISHES</b>	G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	4560lm (3000°K, 900mA)									
<b>DELIVERED LUMEN OUTPUT</b>	3930lm (3000°K, 900mA, 35°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body and flange in anodized aluminium									
<b>DRIVER</b>	not included, see pag. 326									
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	surface (ceiling, wall, floor)									
<b>ACCESSORIES</b>	see pag. 179 - 180									
<b>NOTES</b>										

<b>POWER SUPPLY</b>	max 50W - max 1400mA									
<b>CODE</b>	ICNO2 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> </tr> </table>	M	W	X				20°	35°	50°
M	W	X								
20°	35°	50°								
<b>FINISHES</b>	G - Grey B - Black									
<b>LUMEN OUTPUT SOURCE</b>	7080lm (3000°K, 1400mA)									
<b>DELIVERED LUMEN OUTPUT</b>	5780lm (3000°K, 1400mA, 35°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	body and flange in anodized aluminium									
<b>DRIVER</b>	not included, see pag. 325 and 326									
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,75 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	surface (ceiling, wall, floor)									
<b>ACCESSORIES</b>	see pag. 179 - 180									
<b>NOTES</b>										

# Inox spotlights




# Micro Spot





<b>POWER SUPPLY</b>	max 1W - max 350mA															
<b>CODE</b>	MCS01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td style="text-align: center;">N</td> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> <td style="text-align: center;">E</td> <td style="text-align: center;">D</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">20°</td> <td style="text-align: center;">35°</td> <td style="text-align: center;">50°</td> <td style="text-align: center;">20x45°</td> <td style="text-align: center;">45°</td> </tr> </table>	N	M	W	E	D						20°	35°	50°	20x45°	45°
N	M	W	E	D												
20°	35°	50°	20x45°	45°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 35°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,25 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (ceiling, wall, floor)															
<b>ACCESSORIES</b>	see pag. 179 - 180															
<b>NOTES</b>																

## Colibrì inox



<b>POWER SUPPLY</b>	max 2W - max 500mA																		
<b>CODE</b>	CBI01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td style="text-align: center;">N</td> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> <td style="text-align: center;">X</td> <td style="text-align: center;">T</td> <td style="text-align: center;">D</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">10°</td> <td style="text-align: center;">25°</td> <td style="text-align: center;">40°</td> <td style="text-align: center;">60°</td> <td style="text-align: center;">110°</td> <td style="text-align: center;">Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	I - Inox AISI 316L																		
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	Inox AISI 316L																		
<b>DRIVER</b>	not included, see pag. 323 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>ACCESSORIES</b>	see pag. 179 - 180																		
<b>NOTES</b>	24V version on request																		

# Sirio inox



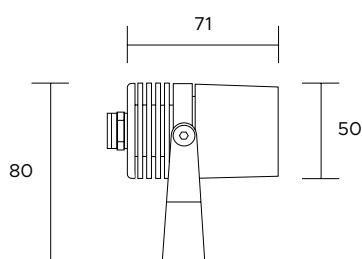


<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	SRX01 ■■■□
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	S 3°
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 3°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	24V version on request

<b>POWER SUPPLY</b>	max 6W - max 700mA
<b>CODE</b>	SRX02 ■■■□
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N M W 15° 25° 40°
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	800lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	430lm (3000°K, 700mA, 25°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>ACCESSORIES</b>	see pag. 179 - 180
<b>NOTES</b>	24V version on request




## Dodo

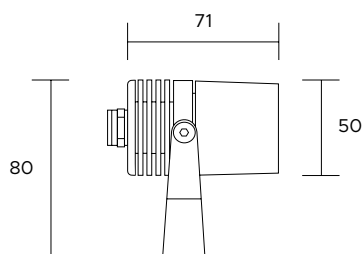

<b>POWER SUPPLY</b>	max 6W - max 500mA															
<b>CODE</b>	DDX01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						15°	25°	40°	110°	Diff.
N	M	W	T	D												
15°	25°	40°	110°	Diff.												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)															
<b>DELIVERD LUMEN OUTPUT</b>	350lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	3 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 324 and 326															
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (ceiling, wall, floor)															
<b>ACCESSORIES</b>	see pag. 179 - 180															
<b>NOTES</b>	24V version on request															


	max 9W - max 700mA															
<b>CODE</b>	DDX02 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>															
	1 - RGB 2 - AWB 3 - A WW W															
	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						15°	25°	40°	110°	Diff.
N	M	W	T	D												
15°	25°	40°	110°	Diff.												
	I - Inox AISI 316L															
	390lm (3000°K, 700mA)															
	360lm (3000°K, 700mA, 40°)															
	3 power LEDs															
	Inox AISI 316L															
	not included, see pag. 324 and 326															
	includes 1,5 mt Liyy - AD8 6 x 0,35 cable															
	in series															
	surface (ceiling, wall, floor)															
	see pag. 179 - 180															

# Ibis

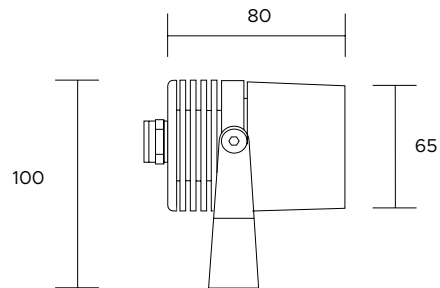

<b>POWER SUPPLY</b>	max 10W - max 250mA									
<b>CODE</b>	IBS01 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> </tr> </table>	N	M	W				15°	30°	45°
N	M	W								
15°	30°	45°								
<b>FINISHES</b>	I - Inox AISI 316L									
<b>LUMEN OUTPUT SOURCE</b>	1260lm (3000°K, 250mA)									
<b>DELIVERED LUMEN OUTPUT</b>	830lm (3000°K, 250mA, 45°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	Inox AISI 316L									
<b>DRIVER</b>	not included, see pag. 321 and 326									
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	surface (ceiling, wall, floor)									
<b>ACCESSORIES</b>	see pag. 179 - 180									
<b>NOTES</b>	24V version on request									

## Emu

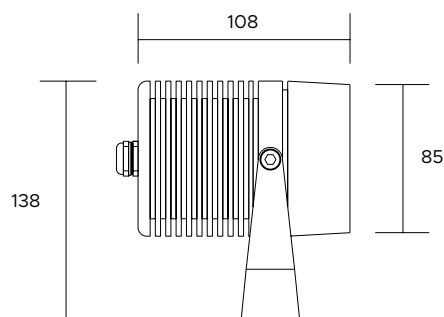

<b>POWER SUPPLY</b>	max 20W - 220V / 240V												
<b>CODE</b>	EMU01 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td>N</td> <td>M</td> <td>W</td> <td></td> </tr> <tr> <td>15°</td> <td>30°</td> <td>45°</td> <td></td> </tr> </table>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N	M	W		15°	30°	45°	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>										
N	M	W											
15°	30°	45°											
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	2480lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	1940lm (3000°K, 500mA, 45°)												
<b>LED NUMBER</b>	1 power LED multichip												
<b>MATERIAL</b>	Inox AISI 316L												
<b>DRIVER</b>	included												
<b>POWER CABLE</b>	includes 1,5 mt H05RN-F 3 x 0,75 cable												
<b>WIRING</b>													
<b>MOUNTING</b>	surface (ceiling, wall, floor)												
<b>ACCESSORIES</b>	see pag. 179 - 180												
<b>NOTES</b>													

# Accessories

## Installation



Code: **PI003**

Inox stake for:

SPOTLIGHTS  
INOX SPOTLIGHTS



Code: **PI001**

Inox stake for:


SPOTLIGHTS  
INOX SPOTLIGHTS



Code: **PI002**

Inox stake for:

SPOTLIGHTS  
INOX SPOTLIGHTS




Code: **PI004**

Extension for:

SPOTLIGHTS  
INOX SPOTLIGHTS

200 mm in the ground + 150mm

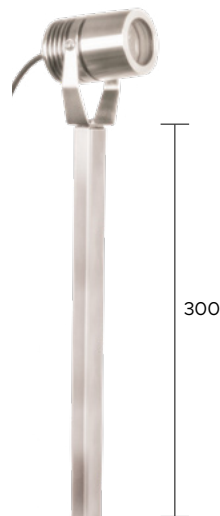

Code: **PI005**

Extension for:

SPOTLIGHTS  
INOX SPOTLIGHTS

200 mm in the ground + 300mm

## Accessories

## Antiglare

Code: **CAPI1**

Inox anti-glare cap for:


SIRIO inox  
DODOCode: **NIDO1**

Hex louver for:

SIRIO inox  
DODOCode: **CAPI2**

Inox anti-glare cap for:

IBIS

Code: **NIDO2**

Hex louver for:

IBIS

## Tree Light Belt

Code: **BLT01**5m x 35mm belt to fix the  
device to the tree trunk,  
equipped with buckle - for:SPOTLIGHTS  
INOX SPOTLIGHTSCode: **BLT02**5m x 25mm belt to fix the  
device to the tree trunk,  
equipped with buckle - for:SPOTLIGHTS  
INOX SPOTLIGHTSCode: **PLT01**


Fixing plate for:

SPOTLIGHTS  
INOX SPOTLIGHTSCode: **PLT02**

Fixing plate for:

SPOTLIGHTS  
INOX SPOTLIGHTS



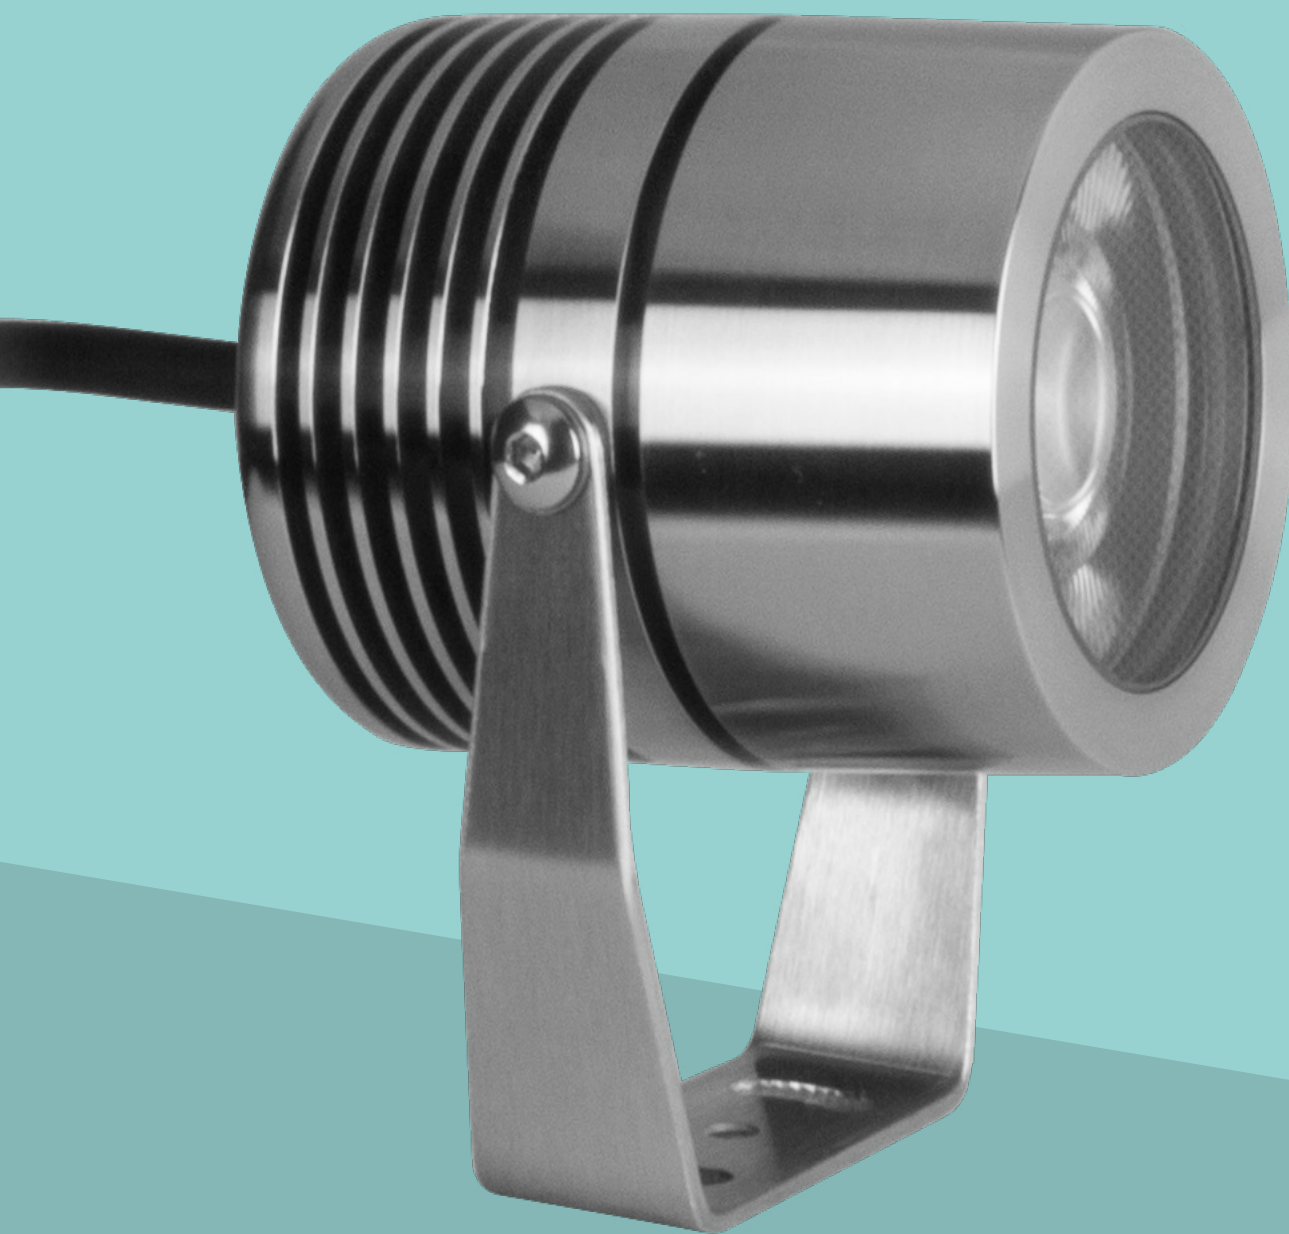


PLG


# Architectural Lights

Outdoor - Architectural lights




# Arco

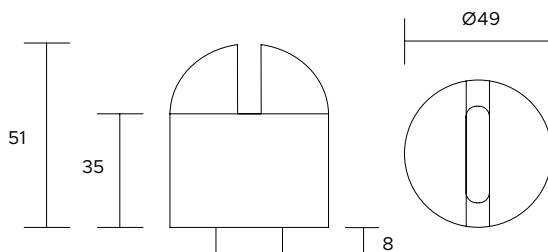


<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	ARC01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	 L 180° x 8°
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 180° x 8°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>NOTES</b>	other RAL on request




<b>POWER SUPPLY</b>	max 3W - 24V
<b>CODE</b>	ARC24 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	 L 180° x 8°
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 180° x 8°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 327
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in parallel
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>NOTES</b>	other RAL on request

## Arco in

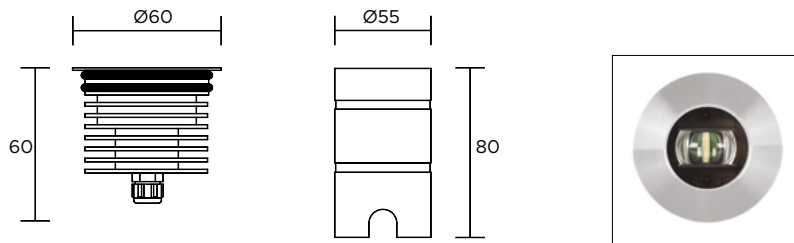

<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	ARI01 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	<input type="checkbox"/> C - Cool white 5500°K <input type="checkbox"/> N - Natural white 4000°K <input type="checkbox"/> W - Warm white 3000°K <input type="checkbox"/> H - Warm white 3000°K - CRI90 <input type="checkbox"/> Y - Warm white 2700°K
<b>OPTICS</b>	<input type="checkbox"/> L 120°x8°
<b>FINISHES</b>	<input type="checkbox"/> I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 120°x8°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall, floor)
<b>ACCESSORIES</b>	outer case code: PL990
<b>NOTES</b>	24V version on request

# Arco pr



<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	APR01 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input checked="" type="checkbox"/> L 120°x8°
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERD LUMEN OUTPUT</b>	130lm (3000°K, 700mA, 120°x8°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>ACCESSORIES</b>	
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>NOTES</b>	24V version available on request





# Floor Recessed

Outdoor - Floor recessed




# Tiny

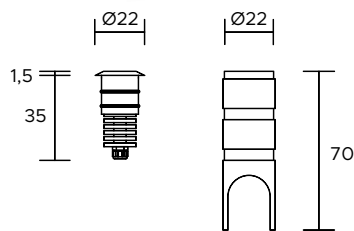

<b>POWER SUPPLY</b>	max 1W - max 350mA																		
<b>CODE</b>	NKE01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	M	W	X	E	T	D							20°	35°	50°	20°x45°	110°	Diff.
M	W	X	E	T	D														
20°	35°	50°	20°x45°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	110lm(3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 35°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 322 and 326																		
<b>POWER CABLE</b>	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	recessed (floor)																		
<b>ACCESSORIES</b>	outer case code: NK990																		
<b>NOTES</b>																			

<b>POWER SUPPLY</b>	max 1W - max 350mA																		
<b>CODE</b>	NKI01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	M	W	X	E	T	D							20°	35°	50°	20°x45°	110°	Diff.
M	W	X	E	T	D														
20°	35°	50°	20°x45°	110°	Diff.														
<b>FINISHES</b>	I - Inox AISI 316L																		
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 35°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L																		
<b>DRIVER</b>	not included, see pag. 322 and 326																		
<b>POWER CABLE</b>	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	recessed (floor)																		
<b>ACCESSORIES</b>	outer case code: NK990																		
<b>NOTES</b>																			




## Tiny inox

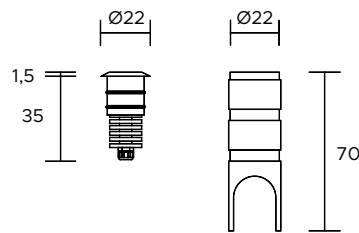

<b>POWER SUPPLY</b>	max 1W - max 350mA
<b>CODE</b>	TYI01 ■■■
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	M W X E T D 20° 35° 50° 20°x45° 110° Diff.
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 35°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (floor)
<b>ACCESSORIES</b>	outer case code: NK990
<b>NOTES</b>	




# Sigma

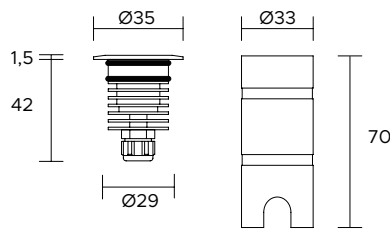

<b>POWER SUPPLY</b>	max 2W - max 500mA														
<b>CODE</b>	SIG01 ■■■□														
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue														
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	E	T	D	10°	25°	40°	60°	30°x65°	110°	Diff.
N	M	W	X	E	T	D									
10°	25°	40°	60°	30°x65°	110°	Diff.									
<b>FINISHES</b>	G - Grey B - Black														
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)														
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)														
<b>LED NUMBER</b>	1 power LED														
<b>MATERIAL</b>	body and flange in anodized aluminium														
<b>DRIVER</b>	not included, see pag. 323 and 326														
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable														
<b>WIRING</b>	in series														
<b>MOUNTING</b>	recessed (floor)														
<b>ACCESSORIES</b>	outer case code: SG990														
<b>NOTES</b>	24V version on request														

<b>POWER SUPPLY</b>	max 2W - max 500mA														
<b>CODE</b>	SIG01 ■■■□														
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue														
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	E	T	D	10°	25°	40°	60°	30°x65°	110°	Diff.
N	M	W	X	E	T	D									
10°	25°	40°	60°	30°x65°	110°	Diff.									
<b>FINISHES</b>	I - Inox AISI 316L														
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)														
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)														
<b>LED NUMBER</b>	1 power LED														
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L														
<b>DRIVER</b>	not included, see pag. 323 and 326														
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable														
<b>WIRING</b>	in series														
<b>MOUNTING</b>	recessed (floor)														
<b>ACCESSORIES</b>	outer case code: SG990														
<b>NOTES</b>	24V version on request														


## Sigma inox

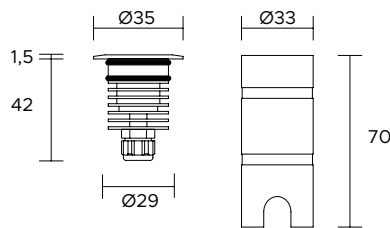

<b>POWER SUPPLY</b>	max 1W - max 350mA																					
<b>CODE</b>	SIG11 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																					
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>																					
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	E	T	D								10°	25°	40°	60°	30°x65°	110°	Diff.
N	M	W	X	E	T	D																
10°	25°	40°	60°	30°x65°	110°	Diff.																
<b>FINISHES</b>	I - Inox AISI 316L																					
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)																					
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 40°)																					
<b>LED NUMBER</b>	1 power LED																					
<b>MATERIAL</b>	body and flange in Inox AISI 316L																					
<b>DRIVER</b>	not included, see pag. 322 and 326																					
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																					
<b>WIRING</b>	in series																					
<b>MOUNTING</b>	recessed (floor)																					
<b>ACCESSORIES</b>	outer case code: SG990																					
<b>NOTES</b>	24V version on request																					





# Sigma square

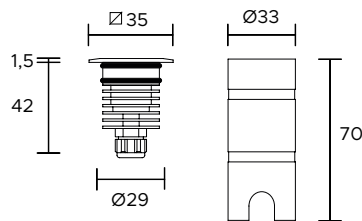

<b>POWER SUPPLY</b>	max 2W - max 500mA																					
<b>CODE</b>	SIS01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																					
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>																					
<b>OPTICS</b>	<table border="0" style="width: 100%; text-align: center;"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	E	T	D								10°	25°	40°	60°	30°x65°	110°	Diff.
N	M	W	X	E	T	D																
10°	25°	40°	60°	30°x65°	110°	Diff.																
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>G - Grey</li> <li>B - Black</li> </ul>																					
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)																					
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)																					
<b>LED NUMBER</b>	1 power LED																					
<b>MATERIAL</b>	body and flange in anodized aluminium																					
<b>DRIVER</b>	not included, see pag. 323 and 326																					
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																					
<b>WIRING</b>	in series																					
<b>MOUNTING</b>	recessed (floor)																					
<b>ACCESSORIES</b>	outer case code: SG990																					
<b>NOTES</b>	24V version on request																					


# Venus

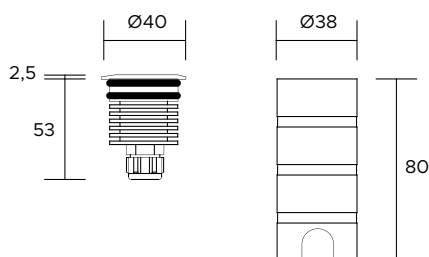

<b>POWER SUPPLY</b>	max 3W - max 700mA																					
<b>CODE</b>	VN001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																					
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																					
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td><td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	E	T	D								10°	25°	40°	60°	30°x65°	110°	Diff.
N	M	W	X	E	T	D																
10°	25°	40°	60°	30°x65°	110°	Diff.																
<b>FINISHES</b>	G - Grey B - Black																					
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)																					
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)																					
<b>LED NUMBER</b>	1 power LED																					
<b>MATERIAL</b>	body and flange in anodized aluminium																					
<b>DRIVER</b>	not included, see pag. 324 and 326																					
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																					
<b>WIRING</b>	in series																					
<b>MOUNTING</b>	recessed (floor)																					
<b>ACCESSORIES</b>	outer case code: VN990																					
<b>NOTES</b>	24V version on request																					


<b>POWER SUPPLY</b>	max 3W - max 700mA																					
<b>CODE</b>	VNI01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																					
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																					
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td><td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	E	T	D								10°	25°	40°	60°	30°x65°	110°	Diff.
N	M	W	X	E	T	D																
10°	25°	40°	60°	30°x65°	110°	Diff.																
<b>FINISHES</b>	I - Inox AISI 316L																					
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)																					
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)																					
<b>LED NUMBER</b>	1 power LED																					
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L																					
<b>DRIVER</b>	not included, see pag. 324 and 326																					
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																					
<b>WIRING</b>	in series																					
<b>MOUNTING</b>	recessed (floor)																					
<b>ACCESSORIES</b>	outer case code: VN990																					
<b>NOTES</b>	24V version on request																					

# Venus square

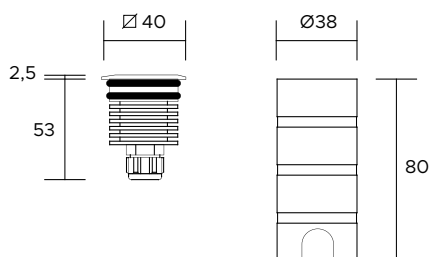




<b>POWER SUPPLY</b>	max 3W - max 700mA																					
<b>CODE</b>	VSM01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																					
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>																					
<b>OPTICS</b>	<table style="display: inline-table; border: none;"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	E	T	D								10°	25°	40°	60°	30°x65°	110°	Diff.
N	M	W	X	E	T	D																
10°	25°	40°	60°	30°x65°	110°	Diff.																
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>G - Grey</li> <li>B - Black</li> </ul>																					
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)																					
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)																					
<b>LED NUMBER</b>	1 power LED																					
<b>MATERIAL</b>	body and flange in anodized aluminium																					
<b>DRIVER</b>	not included, see pag. 324 and 326																					
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																					
<b>WIRING</b>	in series																					
<b>MOUNTING</b>	recessed (floor)																					
<b>ACCESSORIES</b>	outer case code: VN990																					
<b>NOTES</b>	24V version on request																					

## Galaxy

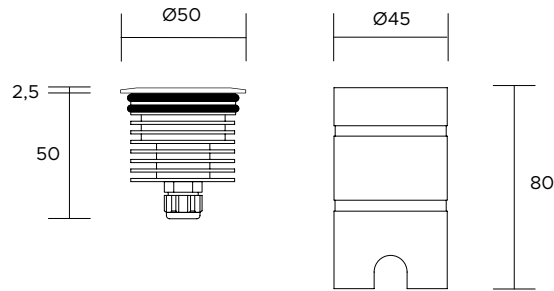

<b>POWER SUPPLY</b>	max 3W - max 350mA
<b>CODE</b>	GX003 ■■■□
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>
<b>OPTICS</b>	
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	250lm (3000°K, 350mA, 30°)
<b>LED NUMBER</b>	3 power LEDs
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (floor)
<b>ACCESSORIES</b>	outer case code: GX990
<b>NOTES</b>	24V version on request

# Pluto


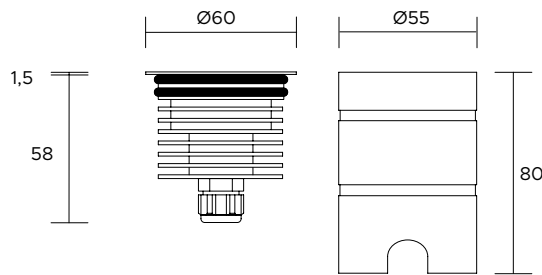


<b>POWER SUPPLY</b>	max 3W - max 350mA															
<b>CODE</b>	PL003 ■■■ □															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						15°	25°	40°	110°	Diff.
N	M	W	T	D												
15°	25°	40°	110°	Diff.												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	260lm (3000°K, 350mA, 40°)															
<b>LED NUMBER</b>	3 power LEDs															
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (floor)															
<b>ACCESSORIES</b>	outer case code: PL990															
<b>NOTES</b>	24V version on request, hex louver on request															

<b>POWER SUPPLY</b>	max 9W - max 700mA															
<b>CODE</b>	PL003 ■■■ □															
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						15°	25°	40°	110°	Diff.
N	M	W	T	D												
15°	25°	40°	110°	Diff.												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	390lm (RGB, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	360lm (RGB, 700mA, 40°)															
<b>LED NUMBER</b>	3 power LEDs															
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 329															
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (floor)															
<b>ACCESSORIES</b>	outer case code: PL990															
<b>NOTES</b>	24V version on request, hex louver on request															




# Pluto ar

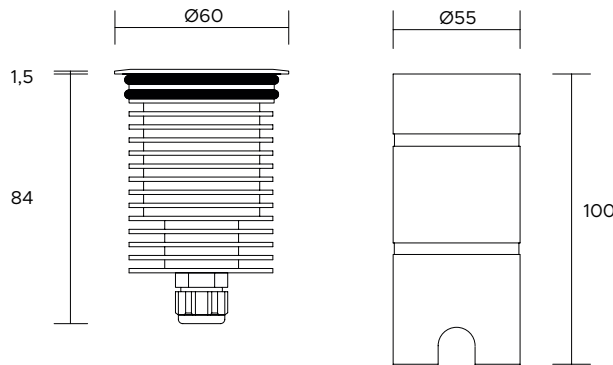

<b>POWER SUPPLY</b>	max 6W - max 500mA									
<b>CODE</b>	PAR03 ■■■ □									
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>	N	M	W				15°	25°	40°
N	M	W								
15°	25°	40°								
<b>FINISHES</b>	I - Inox AISI 316L									
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	350lm (3000°K, 500mA, 40°)									
<b>LED NUMBER</b>	3 power LEDs									
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L									
<b>DRIVER</b>	not included, see pag. 323 and 326									
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (floor)									
<b>ACCESSORIES</b>	outer case code: PA990									
<b>NOTES</b>	24V version on request, hex louver on request									


<b>POWER SUPPLY</b>	max 9W - max 700mA									
<b>CODE</b>	PAR03 ■■■ □									
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>	N	M	W				15°	25°	40°
N	M	W								
15°	25°	40°								
<b>FINISHES</b>	I - Inox AISI 316L									
<b>LUMEN OUTPUT SOURCE</b>	390lm (RGB, 700mA)									
<b>DELIVERED LUMEN OUTPUT</b>	360lm (RGB, 700mA, 40°)									
<b>LED NUMBER</b>	3 power LEDs									
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L									
<b>DRIVER</b>	not included, see pag. 329									
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (floor)									
<b>ACCESSORIES</b>	outer case code: PA990									
<b>NOTES</b>	24V version on request, hex louver on request									

# Sirio in

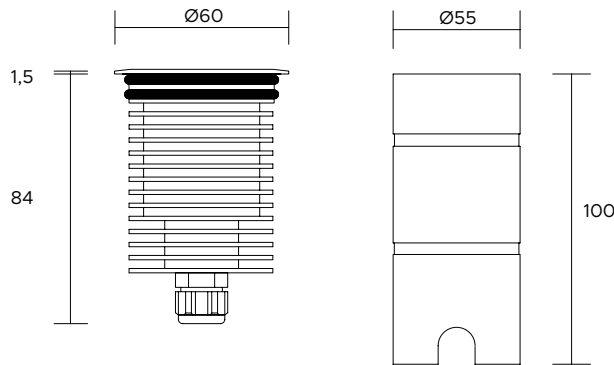




<b>POWER SUPPLY</b>	max 4W - max 900mA
<b>CODE</b>	SRII1 <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>
<b>OPTICS</b>	<div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: black; margin-right: 5px;"></div> <div style="text-align: center;"> <p>S</p> <p>3°</p> </div> </div>
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	220lm (3000°K, 900mA)
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 900mA, 3°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (floor)
<b>ACCESSORIES</b>	outer case code: PA990
<b>NOTES</b>	24V version on request, hex louver on request


## Orion in

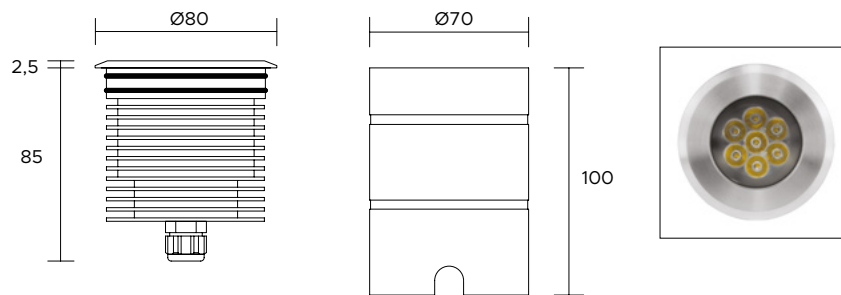


<b>POWER SUPPLY</b>	max 7W - max 350mA									
<b>CODE</b>	ORI07 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>									
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>35°</td> </tr> </table>	N	M	W				15°	25°	35°
N	M	W								
15°	25°	35°								
<b>FINISHES</b>	I - Inox AISI 316L									
<b>LUMEN OUTPUT SOURCE</b>	770lm (3000°K, 350mA)									
<b>DELIVERED LUMEN OUTPUT</b>	700lm (3000°K, 350mA, 35°)									
<b>LED NUMBER</b>	7 power LEDs									
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L									
<b>DRIVER</b>	not included, see pag. 322 and 326									
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (floor)									
<b>ACCESSORIES</b>	outer case code: MR990									
<b>NOTES</b>	hex louver on request									

# Asy in

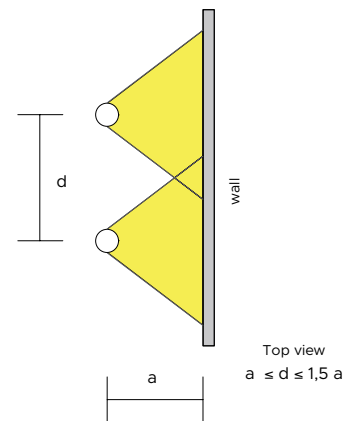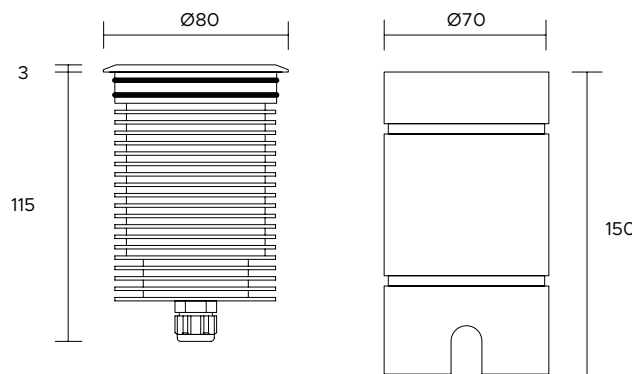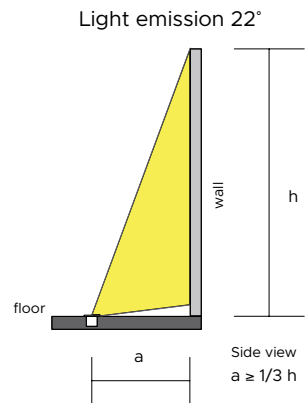

<b>POWER SUPPLY</b>	max 12W - max 350mA
<b>CODE</b>	ASI12 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	A2  wall washer
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	1730lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	1560lm (3000°K, 350mA, Asymmetric)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (floor)
<b>ACCESSORIES</b>	outer case code: MR991
<b>NOTES</b>	


## Mira 6

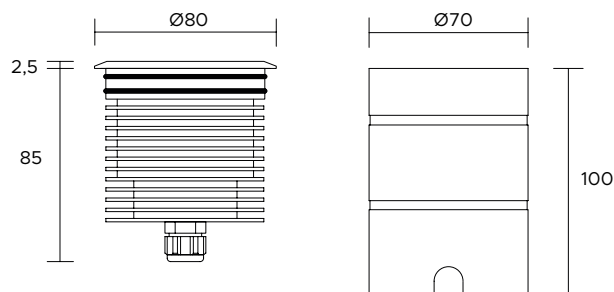

<b>POWER SUPPLY</b>	max 6W - max 350mA
<b>CODE</b>	MIR06 ■ ■ ■ □
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	N M W D 
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	890lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	650lm (3000°K, 350mA, 40°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (floor)
<b>ACCESSORIES</b>	outer case code: MR990
<b>NOTES</b>	hex louver on request




# Mira 12

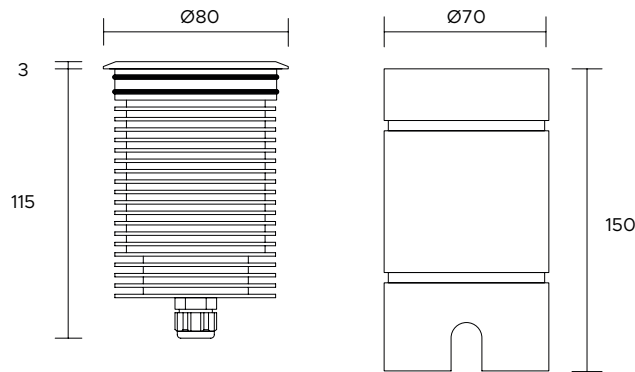


<b>POWER SUPPLY</b>	max 12W - max 350mA												
<b>CODE</b>	MIR12 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table>	N	M	W	D					15°	25°	40°	Diff.
N	M	W	D										
15°	25°	40°	Diff.										
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	1730lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	1290lm (3000°K, 350mA, 40°)												
<b>LED NUMBER</b>	1 power LED multichip												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (floor)												
<b>ACCESSORIES</b>	outer case code: MR991												
<b>NOTES</b>	hex louver on request												

## Mira 20

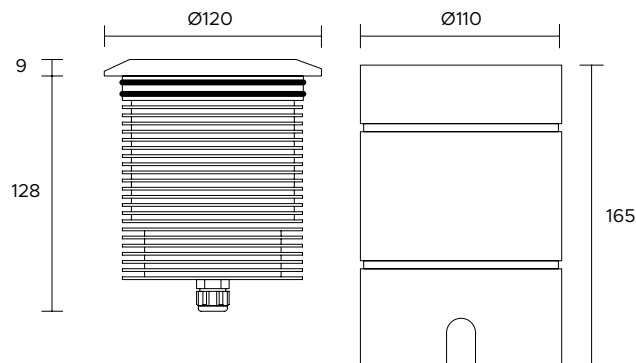




<b>POWER SUPPLY</b>	max 20W - max 500mA								
<b>CODE</b>	MIR20 ■ ■ ■								
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K								
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table>	N	M	W	D	15°	25°	40°	Diff.
N	M	W	D						
15°	25°	40°	Diff.						
<b>FINISHES</b>	I - Inox AISI 316L								
<b>LUMEN OUTPUT SOURCE</b>	2480lm (3000°K, 500mA)								
<b>DELIVERED LUMEN OUTPUT</b>	1940lm (3000°K, 500mA, 40°)								
<b>LED NUMBER</b>	1 power LED multichip								
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L								
<b>DRIVER</b>	not included, see pag. 323 and 326								
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable								
<b>WIRING</b>	in series								
<b>MOUNTING</b>	recessed (floor)								
<b>ACCESSORIES</b>	outer case code: MR992								
<b>NOTES</b>									

# Moon

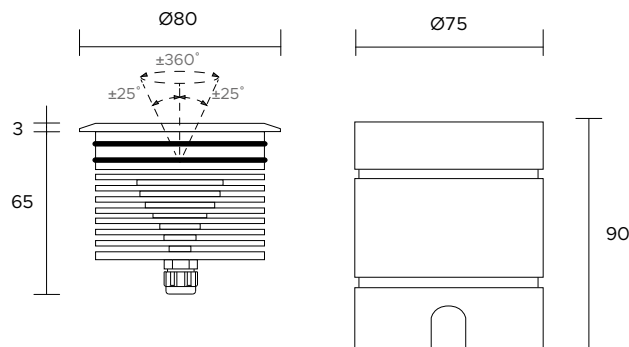

<b>POWER SUPPLY</b>	max 6W - max 500mA												
<b>CODE</b>	MOON3 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>												
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>												
<b>OPTICS</b>	<table style="width: 100%; text-align: center;"> <tr> <td>N</td> <td>M</td> <td>P</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>Diff.</td> </tr> </table>	N	M	P	D					15°	25°	30°	Diff.
N	M	P	D										
15°	25°	30°	Diff.										
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	310lm (3000°K, 500mA, 30°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (floor)												
<b>ACCESSORIES</b>	outer case code: MN990												
<b>NOTES</b>	24V version on request												


# Pluto adj

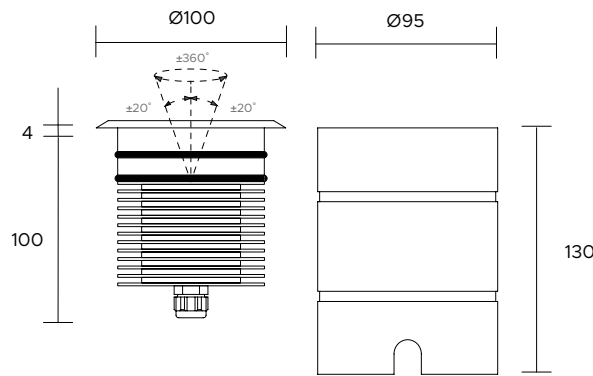

<b>POWER SUPPLY</b>	max 6W - max 500mA												
<b>CODE</b>	PAJ03 ■■■ □												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table>	N	M	W	D					15°	25°	40°	Diff.
N	M	W	D										
15°	25°	40°	Diff.										
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	350lm (3000°K, 500mA, 40°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (floor)												
<b>ACCESSORIES</b>	outer case code: PJ990												
<b>NOTES</b>	24V version on request												

<b>POWER SUPPLY</b>	max 9W - max 700mA												
<b>CODE</b>	PAJ03 ■■■ □												
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table>	N	M	W	D					15°	25°	40°	Diff.
N	M	W	D										
15°	25°	40°	Diff.										
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	390lm (RGB, 700mA)												
<b>DELIVERED LUMEN OUTPUT</b>	360lm (RGB, 700mA, 40°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 329												
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (floor)												
<b>ACCESSORIES</b>	outer case code: PJ990												
<b>NOTES</b>	24V version on request												


# Sirio in adj

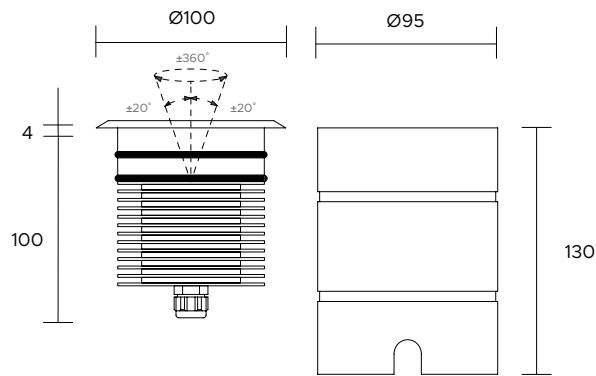

<b>POWER SUPPLY</b>	max 4W - max 900mA
<b>CODE</b>	SRJ01 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	S <input type="checkbox"/>
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	220lm (3000°K, 900mA)
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 900mA, 3°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (floor)
<b>ACCESSORIES</b>	outer case code: PJ990
<b>NOTES</b>	24V version on request




# Orion in adj

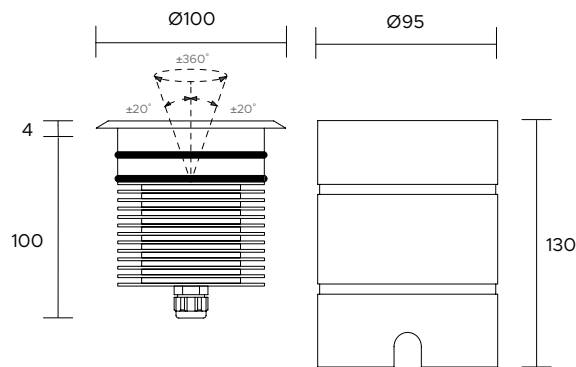


<b>POWER SUPPLY</b>	max 7W - max 350mA
<b>CODE</b>	ORJ07 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="border: 1px solid black; display: inline-block; width: 10px; height: 10px;"></span>
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>
<b>OPTICS</b>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <span style="border: 1px solid black; width: 10px; height: 10px; display: inline-block;"></span>  10°         </div> <div style="text-align: center;"> <span style="border: 1px solid black; width: 10px; height: 10px; display: inline-block;"></span>  25°         </div> <div style="text-align: center;"> <span style="border: 1px solid black; width: 10px; height: 10px; display: inline-block;"></span>  35°         </div> </div>
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	770lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	700lm (3000°K, 350mA, 35°)
<b>LED NUMBER</b>	7 power LEDs
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (floor)
<b>ACCESSORIES</b>	outer case code: PJ990
<b>NOTES</b>	

# Eris adj

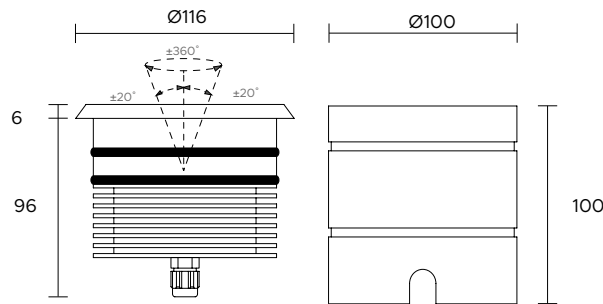

<b>POWER SUPPLY</b>	max 8W - max 500mA
<b>CODE</b>	ERO04 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>
<b>OPTICS</b>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>N 15°</p> </div> <div style="text-align: center;"> <p>M 25°</p> </div> <div style="text-align: center;"> <p>W 40°</p> </div> <div style="text-align: center;"> <p>T 110°</p> </div> <div style="text-align: center;"> <p>D Diff.</p> </div> </div>
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	600lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	550lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	4 power LEDs
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (floor)
<b>ACCESSORIES</b>	outer case code: ER990
<b>NOTES</b>	24V version on request static version on request



# Atlas adj

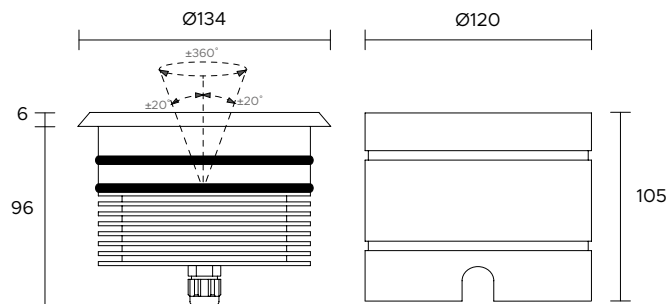

<b>POWER SUPPLY</b>	max 12W - max 500mA												
<b>CODE</b>	AT006 ■■■ □												
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D	10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D								
10°	25°	40°	60°	110°	Diff.								
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	900lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	860lm (3000°K, 500mA, 40°)												
<b>LED NUMBER</b>	6 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (floor)												
<b>ACCESSORIES</b>	outer case code: AT990												
<b>NOTES</b>	24V version on request static version on request												

<b>POWER SUPPLY</b>	max 18W - max 700mA												
<b>CODE</b>	AT006 ■■■ □												
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>1 - RGB</li> <li>2 - AWB</li> <li>3 - A WW W</li> </ul>												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D	10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D								
10°	25°	40°	60°	110°	Diff.								
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	780lm (RGB, 700mA)												
<b>DELIVERED LUMEN OUTPUT</b>	745lm (RGB, 700mA, 40°)												
<b>LED NUMBER</b>	6 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 329												
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (floor)												
<b>ACCESSORIES</b>	outer case code: AT990												
<b>NOTES</b>	24V version on request static version on request												


# Uranus adj

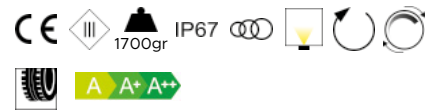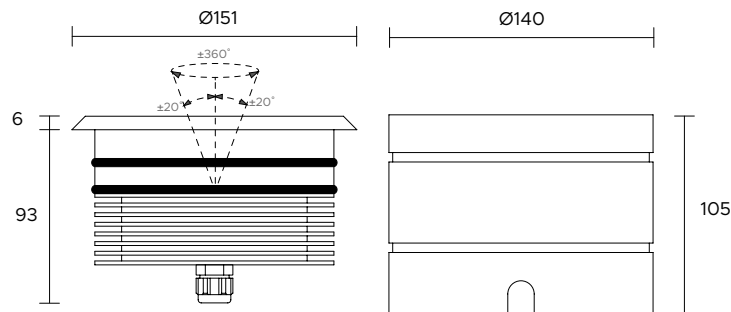

<b>POWER SUPPLY</b>	max 18W - max 500mA												
<b>CODE</b>	UR009 ■■■ □												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue												
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D	10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D								
10°	25°	40°	60°	110°	Diff.								
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	1350lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	1300lm (3000°K, 500mA, 40°)												
<b>LED NUMBER</b>	9 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (floor)												
<b>ACCESSORIES</b>	outer case code: SR990												
<b>NOTES</b>	24V version on request static version on request												

<b>POWER SUPPLY</b>	max 27W - max 700mA												
<b>CODE</b>	UR009 ■■■ □												
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W												
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> <td>D</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	T	D	10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D								
10°	25°	40°	60°	110°	Diff.								
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	1170lm (RGB, 700mA)												
<b>DELIVERED LUMEN OUTPUT</b>	1130lm (RGB, 700mA, 40°)												
<b>LED NUMBER</b>	9 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 329												
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (floor)												
<b>ACCESSORIES</b>	outer case code: SR990												
<b>NOTES</b>	24V version on request static version on request												

# Saturn adj

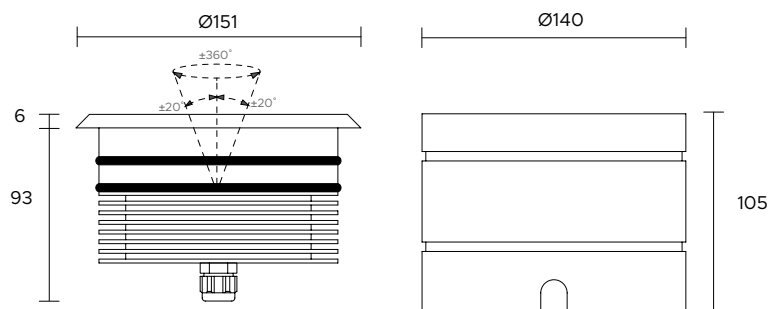

**POWER SUPPLY** max 24W - max 500mA

**CODE** SR012

**LED COLOUR**  
 C - Cool white 5500°K  
 N - Natural white 4000°K  
 W - Warm white 3000°K  
 H - Warm white 3000°K - CRI90  
 Y - Warm white 2700°K  
 A - Amber  
 R - Red  
 G - Green  
 B - Blue

**OPTICS**  
 N  M  W  X  T  D  
 10° 25° 40° 60° 110° Diff.

**FINISHES**  I - Inox AISI 316L

**LUMEN OUTPUT SOURCE** 1800lm (3000°K, 500mA)

**DELIVERED LUMEN OUTPUT** 1690lm (3000°K, 500mA, 40°)

**LED NUMBER** 12 power LEDs

**MATERIAL** body in anodized aluminium, flange in Inox AISI 316L

**DRIVER** not included, see pag. 323 and 326

**POWER CABLE** includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable

**WIRING** in series

**MOUNTING** recessed (floor)

**ACCESSORIES** outer case code: SF990

**NOTES** 24V version on request  
static version on request

max 36W - max 700mA

SR012

1 - RGB  
 2 - AWB  
 3 - A WW W

N  M  W  X  T  D  
 10° 25° 40° 60° 110° Diff.

I - Inox AISI 316L

1560lm (RGB, 700mA)

1460lm (RGB, 700mA, 40°)

12 power LEDs

body in anodized aluminium, flange in Inox AISI 316L

not included, see pag. 329

includes 1,5 mt Liyy-AD8 6 x 0,35 cable

in series

recessed (floor)

outer case code: SF990

24V version on request  
static version on request







Outdoor - Floor recessed



# Grazing Lights







# Jolly

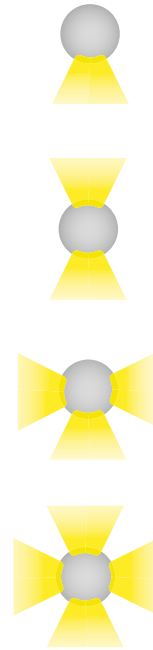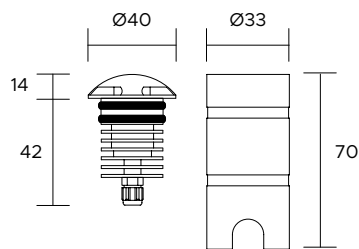



<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	JY001 <input type="checkbox"/> <input type="checkbox"/> JY002 <input type="checkbox"/> <input type="checkbox"/> JY003 <input type="checkbox"/> <input type="checkbox"/> JY004 <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	90lm (3000°K, 500mA)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and head in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall, floor)
<b>ACCESSORIES</b>	outer case code: SG990
<b>NOTES</b>	24V version on request

# Jolly h

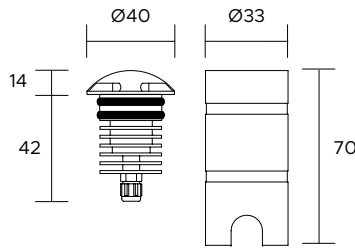

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	JH001 <input type="checkbox"/> <input type="checkbox"/> JH002 <input type="checkbox"/> <input type="checkbox"/> JH003 <input type="checkbox"/> <input type="checkbox"/> JH004 <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>FINISHES</b>	<input type="checkbox"/> I - Inox
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	90lm (3000°K, 500mA)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium, head in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall, floor)
<b>ACCESSORIES</b>	outer case code: SG990
<b>NOTES</b>	24V version on request


# Jolly inox

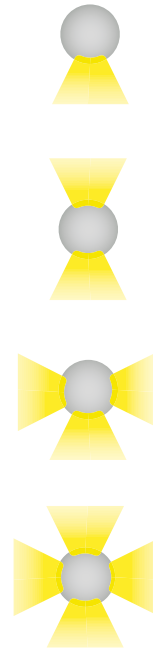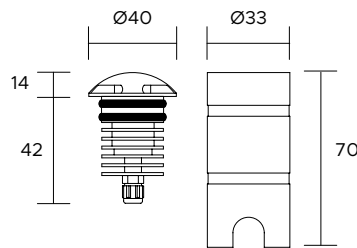

<b>POWER SUPPLY</b>	max 1W - max 350mA
<b>CODE</b>	J1001 <input type="checkbox"/> <input type="checkbox"/> J1002 <input type="checkbox"/> <input type="checkbox"/> J1003 <input type="checkbox"/> <input type="checkbox"/> J1004 <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>FINISHES</b>	I - Inox
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and head in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall, floor)
<b>ACCESSORIES</b>	outer case code: SG990
<b>NOTES</b>	24V version on request





# Jolly square

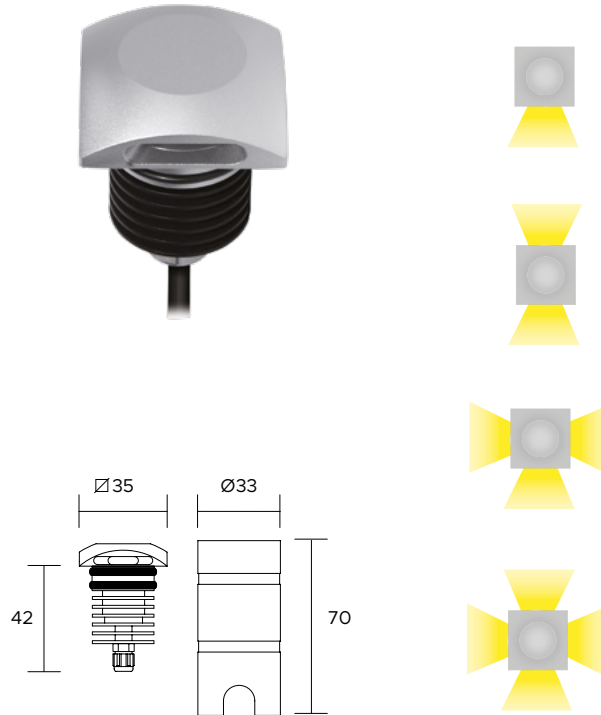

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	JYS01 <input type="checkbox"/> JYS02 <input type="checkbox"/> JYS03 <input type="checkbox"/> JYS04 <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	90lm (3000°K, 500mA)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and head in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall, floor)
<b>ACCESSORIES</b>	outer case code: SG990
<b>NOTES</b>	24V version on request

# Alpha

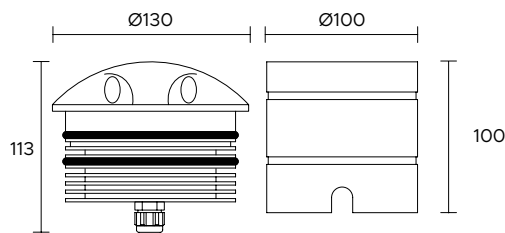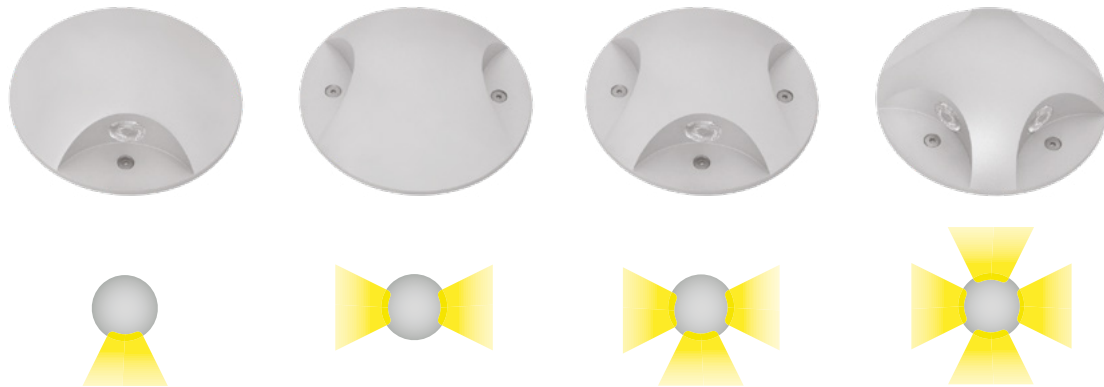



<b>POWER SUPPLY</b>	max 2W - 220V/240V
<b>CODE</b>	A1001 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> A1002 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> A1003 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> A1004 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input type="checkbox"/> N <input type="checkbox"/> M <input type="checkbox"/> W <input type="checkbox"/> X <input type="checkbox"/> E <input type="checkbox"/> T <input type="checkbox"/> D 10° 25° 40° 60° 30°x65° 110° Diff.
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA) - A1001
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°) - A1001
<b>LED NUMBER</b>	1 power LED - A1001
<b>MATERIAL</b>	body and head in anodized aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>MOUNTING</b>	recessed (floor)
<b>ACCESSORIES</b>	outer case code: AL990
<b>NOTES</b>	24V version on request

# Ceiling recessed



Outdoor - Ceiling recessed

# Tiny





<b>POWER SUPPLY</b>	max 1W - max 350mA
<b>CODE</b>	NKME1 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<span style="border: 1px solid black; padding: 2px;">M</span> <span style="border: 1px solid black; padding: 2px;">W</span> <span style="border: 1px solid black; padding: 2px;">X</span> <span style="border: 1px solid black; padding: 2px;">E</span> <span style="border: 1px solid black; padding: 2px;">T</span> <span style="border: 1px solid black; padding: 2px;">D</span> 20° 35° 50° 20°x45° 110° Diff.
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 35°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall)
<b>NOTES</b>	

<b>POWER SUPPLY</b>	max 1W - max 350mA
<b>CODE</b>	NKMI1 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<span style="border: 1px solid black; padding: 2px;">M</span> <span style="border: 1px solid black; padding: 2px;">W</span> <span style="border: 1px solid black; padding: 2px;">X</span> <span style="border: 1px solid black; padding: 2px;">E</span> <span style="border: 1px solid black; padding: 2px;">T</span> <span style="border: 1px solid black; padding: 2px;">D</span> 20° 35° 50° 20°x45° 110° Diff.
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 35°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall)
<b>NOTES</b>	





















## Tiny inox




 Ø 19mm



<b>POWER SUPPLY</b>	max 1W - max 350mA												
<b>CODE</b>	TYIM1 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue												
<b>OPTICS</b>	<table border="0"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>20°</td> <td>35°</td> <td>50°</td> <td>20°x45°</td> <td>110°</td> <td>Diff.</td> </tr> </table>							20°	35°	50°	20°x45°	110°	Diff.
													
20°	35°	50°	20°x45°	110°	Diff.								
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 35°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	body and flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall)												
<b>NOTES</b>													



# Sigma



Ø 31mm



A A+ A++

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	SIGM1 ■■■□
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	N 10° M 25° W 40° X 60° E 30°x65° T 110° D Diff.
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall)
<b>NOTES</b>	24V version on request


Ø 31mm



A A+ A++

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	SGIM1 ■■■□
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	N 10° M 25° W 40° X 60° E 30°x65° T 110° D Diff.
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (ceiling, wall)
<b>NOTES</b>	24V version on request

## Sigma inox




Ø 31mm



<b>POWER SUPPLY</b>	max 1W - max 350mA																					
<b>CODE</b>	SIM11 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																					
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>																					
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	E	T	D								10°	25°	40°	60°	30°x65°	110°	Diff.
N	M	W	X	E	T	D																
10°	25°	40°	60°	30°x65°	110°	Diff.																
<b>FINISHES</b>	I - Inox AISI 316L																					
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)																					
<b>DELIVERED LUMEN OUTPUT</b>	100lm (3000°K, 350mA, 40°)																					
<b>LED NUMBER</b>	1 power LED																					
<b>MATERIAL</b>	body and flange in Inox AISI 316L																					
<b>DRIVER</b>	not included, see pag. 322 and 326																					
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																					
<b>WIRING</b>	in series																					
<b>MOUNTING</b>	recessed (ceiling, wall)																					
<b>NOTES</b>	24V version on request																					

# Sigma square




Ø 31mm



<b>POWER SUPPLY</b>	max 2W - max 500mA																					
<b>CODE</b>	SISM1 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																					
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																					
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	X	E	T	D								10°	25°	40°	60°	30°x65°	110°	Diff.
N	M	W	X	E	T	D																
10°	25°	40°	60°	30°x65°	110°	Diff.																
<b>FINISHES</b>	G - Grey B - Black																					
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)																					
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)																					
<b>LED NUMBER</b>	1 power LED																					
<b>MATERIAL</b>	body and flange in anodized aluminium																					
<b>DRIVER</b>	not included, see pag. 323 and 326																					
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																					
<b>WIRING</b>	in series																					
<b>MOUNTING</b>	recessed (ceiling, wall)																					
<b>NOTES</b>	24V version on request																					

# Venus



Ø 37mm



A A+ A++

Ø 37mm





A A+ A++


<b>POWER SUPPLY</b>	max 3W - max 700mA																		
<b>CODE</b>	VNMO1 ■■■ □																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 324 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	recessed (ceiling, wall)																		
<b>NOTES</b>	24V version on request																		



















<b>POWER SUPPLY</b>	max 3W - max 700mA																		
<b>CODE</b>	VNMI1 ■■■ □																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	I - Inox AISI 316L																		
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L																		
<b>DRIVER</b>	not included, see pag. 324 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	recessed (ceiling, wall)																		
<b>NOTES</b>	24V version on request																		

# Venus square




 Ø 37mm



<b>POWER SUPPLY</b>	max 3W - max 700mA																		
<b>CODE</b>	VSM01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td style="text-align: center;">N</td> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> <td style="text-align: center;">X</td> <td style="text-align: center;">T</td> <td style="text-align: center;">D</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">10°</td> <td style="text-align: center;">25°</td> <td style="text-align: center;">40°</td> <td style="text-align: center;">60°</td> <td style="text-align: center;">110°</td> <td style="text-align: center;">Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
																			
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 324 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall)																		
<b>NOTES</b>	24V version on request																		



## Galaxy




Ø 43mm



<b>POWER SUPPLY</b>	max 3W - max 350mA															
<b>CODE</b>	GXM03 ■■■															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>30°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						15°	25°	30°	110°	Diff.
N	M	W	T	D												
15°	25°	30°	110°	Diff.												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	260lm (3000°K, 350mA, 30°)															
<b>LED NUMBER</b>	3 power LEDs															
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall)															
<b>NOTES</b>	24V version on request															

# Pluto



Ø 52mm



A A+ A++

Ø 52mm





A A+ A++

<b>POWER SUPPLY</b>	max 3W - max 350mA															
<b>CODE</b>	PLM03 ■■■ □															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						15°	25°	40°	110°	Diff.
N	M	W	T	D												
15°	25°	40°	110°	Diff.												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	330lm (3000°K, 350mA)															
<b>DELIVERED LUMEN OUTPUT</b>	260lm (3000°K, 350mA, 40°)															
<b>LED NUMBER</b>	3 power LEDs															
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 322 and 326															
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall)															
<b>NOTES</b>	24V version on request, hex louver on request															

<b>POWER SUPPLY</b>	max 9W - max 700mA															
<b>CODE</b>	PLM03 ■■■ □															
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>110°</td> <td>Diff.</td> </tr> </table>	N	M	W	T	D						15°	25°	40°	110°	Diff.
N	M	W	T	D												
15°	25°	40°	110°	Diff.												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	390lm (RGB, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	360lm (RGB, 700mA, 40°)															
<b>LED NUMBER</b>	3 power LEDs															
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 329															
<b>POWER CABLE</b>	includes 1,5 mt Liyy AD8 6 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (ceiling, wall)															
<b>NOTES</b>	24V version on request, hex louver on request															


# Pluto ar

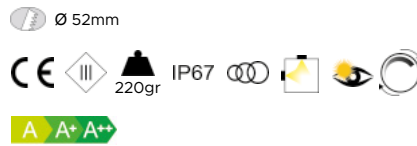

<b>POWER SUPPLY</b>	max 6W - max 500mA									
<b>CODE</b>	PARM3 ■■■ □									
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>	N	M	W				15°	25°	40°
N	M	W								
15°	25°	40°								
<b>FINISHES</b>	I - Inox AISI 316L									
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	350lm (3000°K, 500mA, 40°)									
<b>LED NUMBER</b>	3 power LEDs									
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L									
<b>DRIVER</b>	not included, see pag. 323 and 326									
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling, wall)									
<b>NOTES</b>	24V version on request, hex louver on request									

<b>POWER SUPPLY</b>	max 9W - max 700mA									
<b>CODE</b>	PARM3 ■■■ □									
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>	N	M	W				15°	25°	40°
N	M	W								
15°	25°	40°								
<b>FINISHES</b>	I - Inox AISI 316L									
<b>LUMEN OUTPUT SOURCE</b>	390lm (RGB, 700mA)									
<b>DELIVERED LUMEN OUTPUT</b>	360lm (RGB, 700mA, 40°)									
<b>LED NUMBER</b>	3 power LEDs									
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L									
<b>DRIVER</b>	not included, see pag. 329									
<b>POWER CABLE</b>	includes 1,5 mt Liyy-AD8 6 x 0,35 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (ceiling, wall)									
<b>NOTES</b>	24V version on request, hex louver on request									

# Mira 6




Ø 78mm



<b>POWER SUPPLY</b>	max 6W - max 350mA												
<b>CODE</b>	MIRM6 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table>	N	M	W	D					15°	25°	40°	Diff.
N	M	W	D										
15°	25°	40°	Diff.										
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	890lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	650lm (3000°K, 350mA, 40°)												
<b>LED NUMBER</b>	1 power LED multichip												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall)												
<b>NOTES</b>	hex louver on request												

## Mira 12

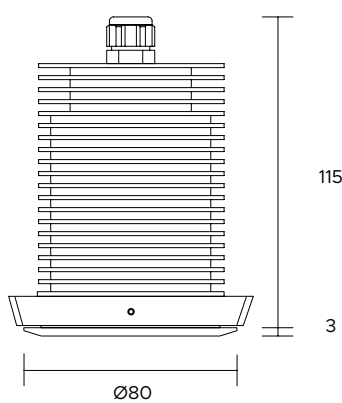

Ø 78mm



<b>POWER SUPPLY</b>	max 12W - max 350mA												
<b>CODE</b>	MRM12 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>D</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> <td>Diff.</td> </tr> </table>	N	M	W	D					15°	25°	40°	Diff.
N	M	W	D										
15°	25°	40°	Diff.										
<b>FINISHES</b>	I - Inox AISI 316L												
<b>LUMEN OUTPUT SOURCE</b>	1730lm (3000°K, 350mA)												
<b>DELIVERED LUMEN OUTPUT</b>	1290lm (3000°K, 350mA, 40°)												
<b>LED NUMBER</b>	1 power LED multichip												
<b>MATERIAL</b>	body in anodized aluminium, flange in Inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 322 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0.50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (ceiling, wall)												
<b>NOTES</b>	hex louver on request												





Outdoor - Ceiling recessed





# Wall recessed

Outdoor - Wall recessed





# Tiny Plex

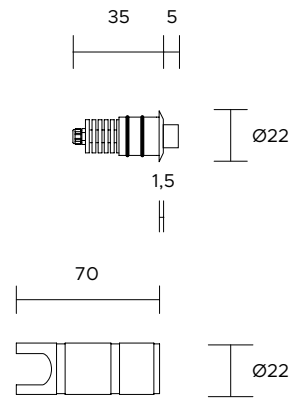


<b>POWER SUPPLY</b>	max 1W - max 350mA
<b>CODE</b>	TPM01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<span style="border: 1px solid black; padding: 2px;">D</span> Diff
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 350mA, Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	
<b>NOTES</b>	


<b>POWER SUPPLY</b>	max 1W - max 350mA
<b>CODE</b>	TP001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<span style="border: 1px solid black; padding: 2px;">D</span> Diff
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	110lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 350mA, Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 0,5 mt Sub4 FROST-UV 2 x 0,25 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: NK990
<b>NOTES</b>	

## Dock



Ø 37mm





<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	DKM01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	 Diff
<b>FINISHES</b>	I - Inox AISI 316L G - Grey
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 700mA, Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	
<b>NOTES</b>	24V version on request




<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	DK001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	 Diff
<b>FINISHES</b>	I - Inox AISI 316L G - Grey
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 700mA, Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: VN990
<b>NOTES</b>	24V version on request


# Dahlia



Ø 37mm





<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	DHM01 ■■■ □
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	 Diff
<b>FINISHES</b>	I - Inox AISI 316L G - Grey
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 700mA, Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	
<b>NOTES</b>	24V version on request


<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	DH001 ■■■ □
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	 Diff
<b>FINISHES</b>	I - Inox AISI 316L G - Grey
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 700mA, Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: VN990
<b>NOTES</b>	24V version on request





# Daisy






Ø 37mm



<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	DSM01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	 Diff
<b>FINISHES</b>	I - Inox AISI 316L G - Grey
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 700mA, Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	
<b>NOTES</b>	24V version on request

<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	DS001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	 Diff
<b>FINISHES</b>	I - Inox AISI 316L G - Grey
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 700mA, Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: VN990
<b>NOTES</b>	24V version on request

# Circle







Ø 43mm



<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	CRIM1 <input checked="" type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 700mA)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium flange in inox AISI 316L
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	
<b>NOTES</b>	24V version on request

<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	CRI01 <input checked="" type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CR190 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>FINISHES</b>	I - Inox AISI 316L
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	70lm (3000°K, 700mA)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium flange in inox AISI 316L
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: GX990
<b>NOTES</b>	24V version on request


# Evo

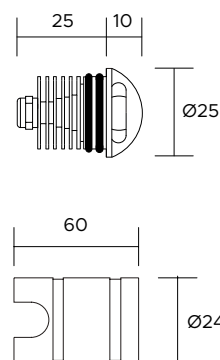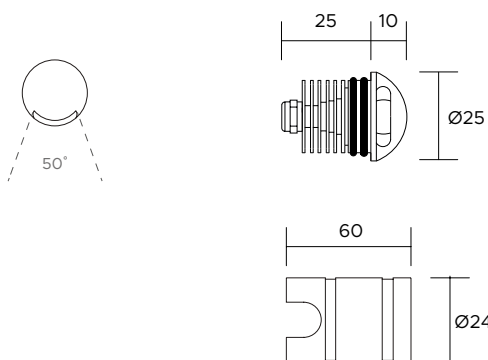

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	EV001 <input type="checkbox"/>
<b>LED COLOUR</b>	<input type="checkbox"/> C - Cool white 5500°K <input type="checkbox"/> N - Natural white 4000°K <input type="checkbox"/> W - Warm white 3000°K <input type="checkbox"/> H - Warm white 3000°K - CRI90 <input type="checkbox"/> Y - Warm white 2700°K <input type="checkbox"/> A - Amber <input type="checkbox"/> R - Red <input type="checkbox"/> G - Green <input type="checkbox"/> B - Blue
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	90lm (3000°K, 500mA)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and head in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: EV990
<b>NOTES</b>	

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	EV002 <input type="checkbox"/>
<b>LED COLOUR</b>	<input type="checkbox"/> C - Cool white 5500°K <input type="checkbox"/> N - Natural white 4000°K <input type="checkbox"/> W - Warm white 3000°K <input type="checkbox"/> H - Warm white 3000°K - CRI90 <input type="checkbox"/> Y - Warm white 2700°K <input type="checkbox"/> A - Amber <input type="checkbox"/> R - Red <input type="checkbox"/> G - Green <input type="checkbox"/> B - Blue
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	90lm (3000°K, 500mA)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and head in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: EV990
<b>NOTES</b>	

# Gamma

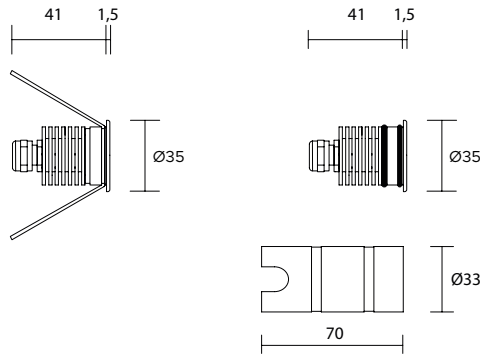

Ø 31mm



A A+ A++




A A+ A++

<b>POWER SUPPLY</b>	max 2W - max 500mA												
<b>CODE</b>	GAM01 ■ ■ ■ □												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
10°	25°	40°	60°										
<b>FINISHES</b>	G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV2 x 0,50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (wall)												
<b>ACCESSORIES</b>													
<b>NOTES</b>	24V version on request												

<b>POWER SUPPLY</b>	max 2W - max 500mA												
<b>CODE</b>	GA001 ■ ■ ■ □												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
10°	25°	40°	60°										
<b>FINISHES</b>	G - Grey B - Black												
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)												
<b>LED NUMBER</b>	1 power LED												
<b>MATERIAL</b>	body and flange in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	recessed (wall)												
<b>ACCESSORIES</b>	outer case code: SG990												
<b>NOTES</b>	24V version on request												

# Gamma square

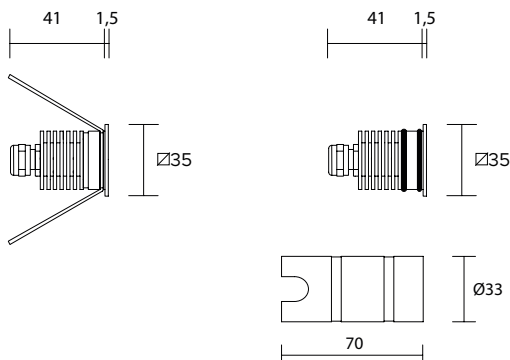

Ø 31mm



A A+ A++



A A+ A++

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	GASMI <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input type="checkbox"/> N <input type="checkbox"/> M <input type="checkbox"/> W <input type="checkbox"/> X 10° 25° 40° 60°
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	
<b>NOTES</b>	24V version on request

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	GAS01 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input type="checkbox"/> N <input type="checkbox"/> M <input type="checkbox"/> W <input type="checkbox"/> X 10° 25° 40° 60°
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: SG990
<b>NOTES</b>	24V version on request



## Brio



BRM01



BRM02




BRM03



BRM04




BRM05



Ø 31mm



<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	BRM01 BRM02 BRM03 BRM04 BRM05 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	A  Asymmetric
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 45° Asy.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	
<b>NOTES</b>	24V version on request

## Brio



BR001



BR002







BR003




BR004




BR005




<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	BR001 BR002 BR003 BR004 BR005 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>H - Warm white 3000°K - CRI90</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>
<b>OPTICS</b>	<ul style="list-style-type: none"> <li>A </li> <li>Asymmetric</li> </ul>
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>G - Grey</li> <li>B - Black</li> </ul>
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 45° Asy.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: SG990
<b>NOTES</b>	24V version on request

# Brio square

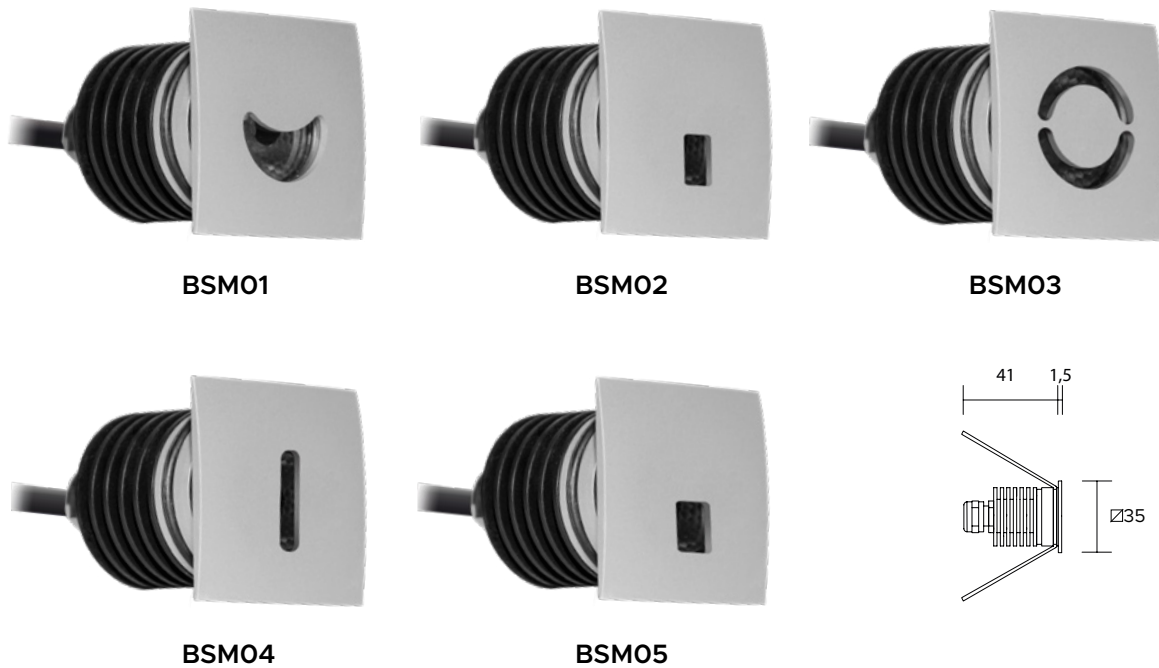



Ø 31mm






<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	BSM01 BSM02 BSM03 BSM04 BSM05 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	A  Asymmetric
<b>FINISHES</b>	G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 45° Asy.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	
<b>NOTES</b>	24V version on request

## Brio Square

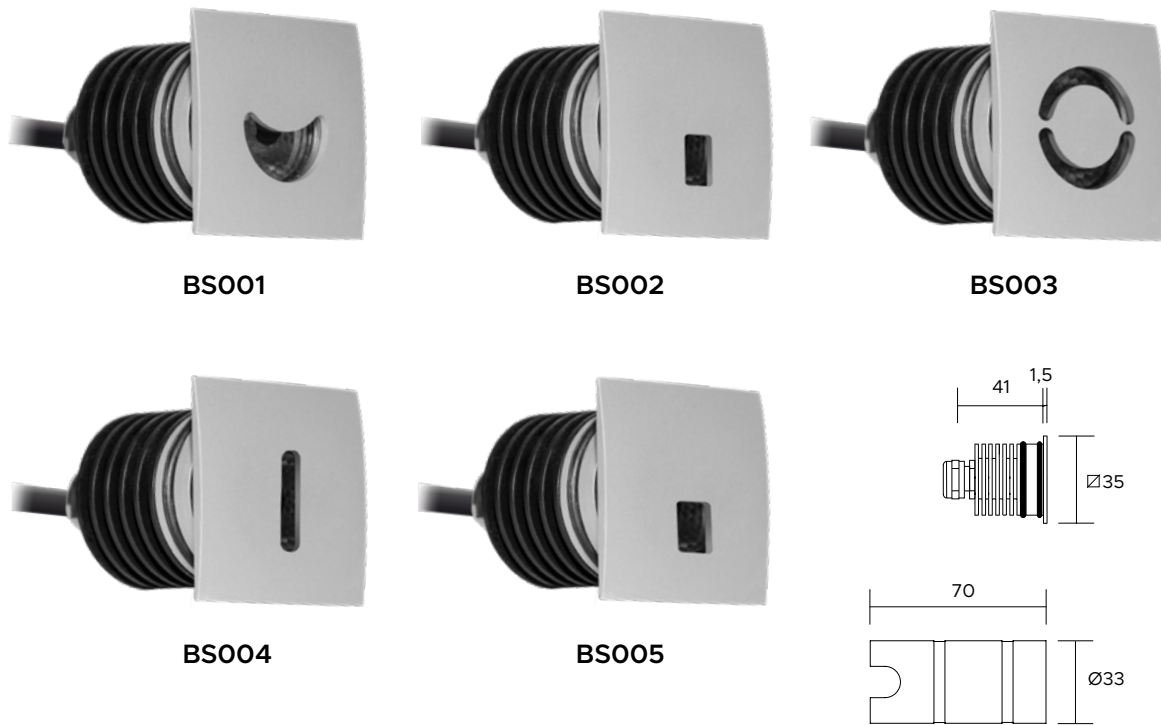

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	BS001 BS002 BS003 BS004 BS005 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	<input type="checkbox"/> C - Cool white 5500°K <input type="checkbox"/> N - Natural white 4000°K <input type="checkbox"/> W - Warm white 3000°K <input type="checkbox"/> H - Warm white 3000°K - CRI90 <input type="checkbox"/> Y - Warm white 2700°K <input type="checkbox"/> A - Amber <input type="checkbox"/> R - Red <input type="checkbox"/> G - Green <input type="checkbox"/> B - Blue
<b>OPTICS</b>	<input type="checkbox"/> A  Asymmetric
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 45° Asy.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case code: SG990
<b>NOTES</b>	24V version on request



# Gemma



Ø 17,5mm



A A+ A++

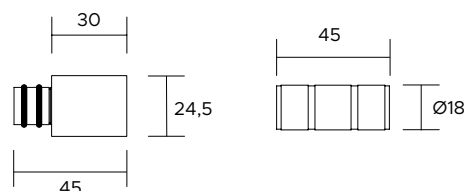


A A+ A++

<b>POWER SUPPLY</b>	max 2W - max 500mA																		
<b>CODE</b>	GEMM1 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 323 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	recessed (wall)																		
<b>ACCESSORIES</b>																			
<b>NOTES</b>																			

<b>POWER SUPPLY</b>	max 2W - max 500mA																		
<b>CODE</b>	GEM01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>T</td><td>D</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>110°</td><td>Diff.</td> </tr> </table>	N	M	W	X	T	D							10°	25°	40°	60°	110°	Diff.
N	M	W	X	T	D														
10°	25°	40°	60°	110°	Diff.														
<b>FINISHES</b>	G - Grey B - Black																		
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)																		
<b>LED NUMBER</b>	1 power LED																		
<b>MATERIAL</b>	body and flange in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 323 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	recessed (wall)																		
<b>ACCESSORIES</b>	outer case code: NK990																		
<b>NOTES</b>																			




## Wind

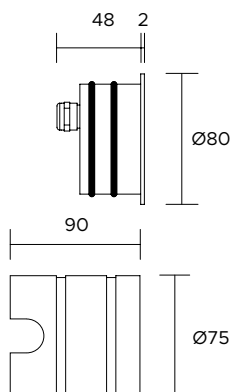

A+ A+ A++


<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	WD001 <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input checked="" type="checkbox"/> A Asymmetric
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 15° Asy.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case included
<b>NOTES</b>	24V version on request

## Wind square

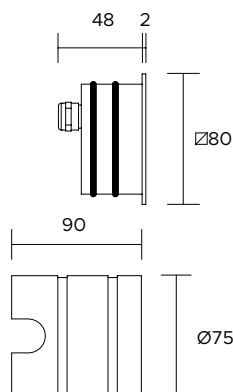

A+ A+ A++

<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	WDS01 <input type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<input checked="" type="checkbox"/> A Asymmetric
<b>FINISHES</b>	<input type="checkbox"/> G - Grey <input type="checkbox"/> B - Black
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 15° Asy.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body and flange in anodized aluminium
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	recessed (wall)
<b>ACCESSORIES</b>	outer case included
<b>NOTES</b>	24V version on request

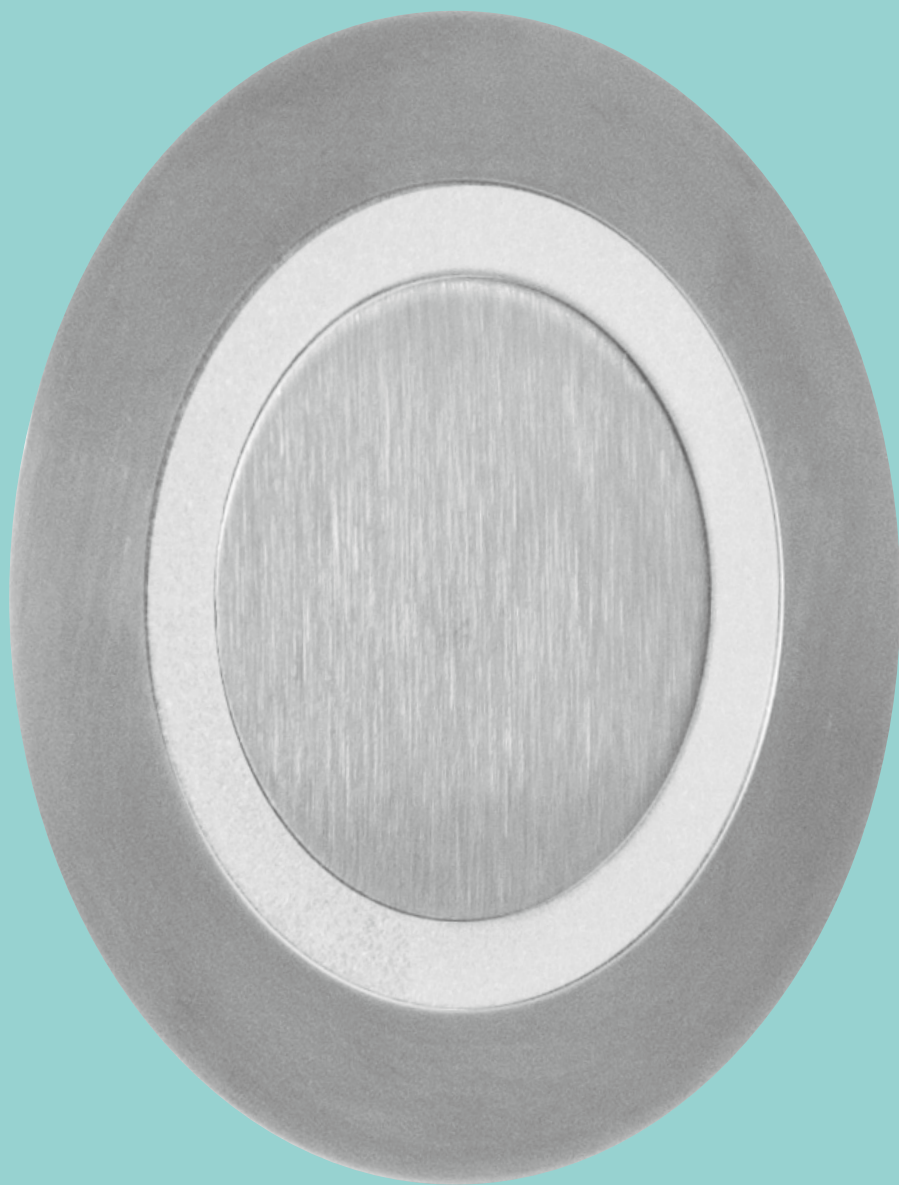

PLG


247

Outdoor - Wall recessed

# Wall surface





# Gianus

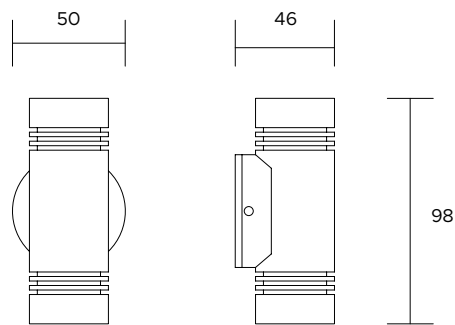

<b>POWER SUPPLY</b>	max 6W - max 700mA												
<b>CODE</b>	GN001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span> <input type="checkbox"/>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue												
<b>OPTICS UP</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
10°	25°	40°	60°										
<b>OPTICS DOWN</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> </tr> </table>	N	M	W	X					10°	25°	40°	60°
N	M	W	X										
10°	25°	40°	60°										
<b>FINISHES</b>	G - Grey												
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)x2												
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)x2												
<b>LED NUMBER</b>	2 power LEDs												
<b>MATERIAL</b>	body in anodized aluminium												
<b>DRIVER</b>	not included, see pag. 324 and 326												
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	surface (wall)												
<b>NOTES</b>	24V version on request												

Examples with different optics








# Linear Lights



Outdoor - Linear Lights





# Strip 6

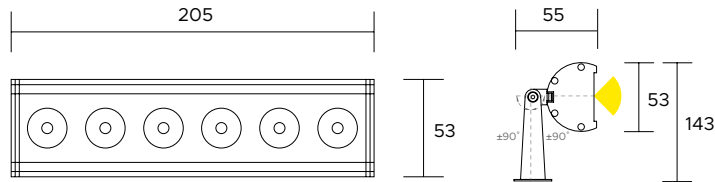


<b>POWER SUPPLY</b>	max 6W - max 350mA																		
<b>CODE</b>	ST006 ■■■																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>30°x65°</td><td>110°</td> </tr> </table>	N	M	W	X	E	T							10°	25°	40°	60°	30°x65°	110°
N	M	W	X	E	T														
10°	25°	40°	60°	30°x65°	110°														
<b>FINISHES</b>	G - Grey																		
<b>LUMEN OUTPUT SOURCE</b>	660lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	640lm (3000°K, 350mA, 40°)																		
<b>LED NUMBER</b>	6 power LEDs																		
<b>MATERIAL</b>	body in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 322 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>NOTES</b>	24V version on request																		

<b>POWER SUPPLY</b>	max 18W - max 700mA																		
<b>CODE</b>	ST006 ■■■																		
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>30°x65°</td><td>110°</td> </tr> </table>	N	M	W	X	E	T							10°	25°	40°	60°	30°x65°	110°
N	M	W	X	E	T														
10°	25°	40°	60°	30°x65°	110°														
<b>FINISHES</b>	G - Grey																		
<b>LUMEN OUTPUT SOURCE</b>	780lm (RGB, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	720lm (RGB, 700mA, 40°)																		
<b>LED NUMBER</b>	6 power LEDs																		
<b>MATERIAL</b>	body in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 329																		
<b>POWER CABLE</b>	includes 1,5 mt Liyy AD8 6 x 0,35 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>NOTES</b>																			

## Strip 12

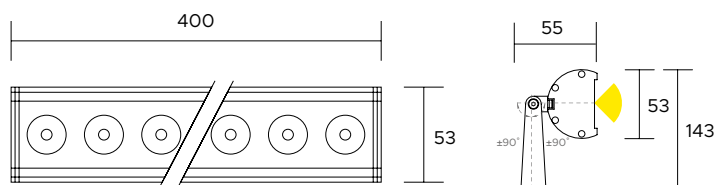

A A+ A++






A A+ A++

<b>POWER SUPPLY</b>	max 12W - max 350mA																		
<b>CODE</b>	ST012 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> </tr> </table>	N	M	W	X	E	T							10°	25°	40°	60°	30°x65°	110°
N	M	W	X	E	T														
10°	25°	40°	60°	30°x65°	110°														
<b>FINISHES</b>	G - Grey																		
<b>LUMEN OUTPUT SOURCE</b>	1320lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	1280lm (3000°K, 350mA, 40°)																		
<b>LED NUMBER</b>	12 power LEDs																		
<b>MATERIAL</b>	body in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 322 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>NOTES</b>	24V version on request																		

<b>POWER SUPPLY</b>	max 36W - max 700mA																		
<b>CODE</b>	ST012 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span>																		
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>E</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>30°x65°</td> <td>110°</td> </tr> </table>	N	M	W	X	E	T							10°	25°	40°	60°	30°x65°	110°
N	M	W	X	E	T														
10°	25°	40°	60°	30°x65°	110°														
<b>FINISHES</b>	G - Grey																		
<b>LUMEN OUTPUT SOURCE</b>	1560lm (RGB, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	1440lm (RGB, 700mA, 40°)																		
<b>LED NUMBER</b>	12 power LEDs																		
<b>MATERIAL</b>	body in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 329																		
<b>POWER CABLE</b>	includes 1,5 mt Liyy AD8 6 x 0,35 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>NOTES</b>																			



# Strip 18

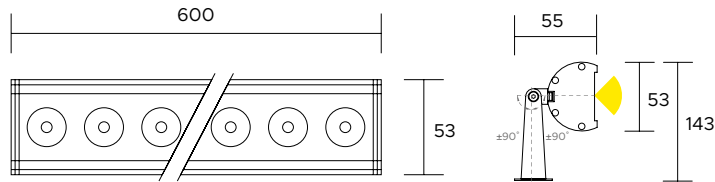

<b>POWER SUPPLY</b>	max 18W - max 350mA																		
<b>CODE</b>	ST018 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>30°x65°</td><td>110°</td> </tr> </table>	N	M	W	X	E	T							10°	25°	40°	60°	30°x65°	110°
N	M	W	X	E	T														
10°	25°	40°	60°	30°x65°	110°														
<b>FINISHES</b>	G - Grey																		
<b>LUMEN OUTPUT SOURCE</b>	1980lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	1400lm (3000°K, 350mA, 40°)																		
<b>LED NUMBER</b>	18 power LEDs																		
<b>MATERIAL</b>	body in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 322 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>NOTES</b>	24V version on request																		


<b>POWER SUPPLY</b>	max 54W - max 700mA																		
<b>CODE</b>	ST018 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span>																		
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>30°x65°</td><td>110°</td> </tr> </table>	N	M	W	X	E	T							10°	25°	40°	60°	30°x65°	110°
N	M	W	X	E	T														
10°	25°	40°	60°	30°x65°	110°														
<b>FINISHES</b>	G - Grey																		
<b>LUMEN OUTPUT SOURCE</b>	2340lm (RGB, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	2160lm (RGB, 700mA, 40°)																		
<b>LED NUMBER</b>	18 power LEDs																		
<b>MATERIAL</b>	body in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 329																		
<b>POWER CABLE</b>	includes 1,5 mt Liyy AD8 6 x 0,35 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>NOTES</b>																			

## Strip 24

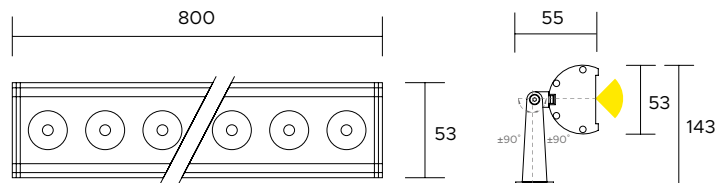

A A+ A++



<b>POWER SUPPLY</b>	max 24W - max 350mA																		
<b>CODE</b>	ST024 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																		
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>30°x65°</td><td>110°</td> </tr> </table>	N	M	W	X	E	T							10°	25°	40°	60°	30°x65°	110°
N	M	W	X	E	T														
10°	25°	40°	60°	30°x65°	110°														
<b>FINISHES</b>	G - Grey																		
<b>LUMEN OUTPUT SOURCE</b>	2640lm (3000°K, 350mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	2260lm (3000°K, 350mA, 40°)																		
<b>LED NUMBER</b>	24 power LEDs																		
<b>MATERIAL</b>	body in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 322 and 326																		
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		
<b>NOTES</b>	24V version on request																		



A A+ A++

<b>POWER SUPPLY</b>	max 72W - max 700mA																		
<b>CODE</b>	ST024 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span>																		
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W																		
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td><td>M</td><td>W</td><td>X</td><td>E</td><td>T</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10°</td><td>25°</td><td>40°</td><td>60°</td><td>30°x65°</td><td>110°</td> </tr> </table>	N	M	W	X	E	T							10°	25°	40°	60°	30°x65°	110°
N	M	W	X	E	T														
10°	25°	40°	60°	30°x65°	110°														
<b>FINISHES</b>	G - Grey																		
<b>LUMEN OUTPUT SOURCE</b>	3120lm (RGB, 700mA)																		
<b>DELIVERED LUMEN OUTPUT</b>	2880lm (RGB, 700mA, 40°)																		
<b>LED NUMBER</b>	24 power LEDs																		
<b>MATERIAL</b>	body in anodized aluminium																		
<b>DRIVER</b>	not included, see pag. 329																		
<b>POWER CABLE</b>	includes 1,5 mt Liyy AD8 6 x 0,35 cable																		
<b>WIRING</b>	in series																		
<b>MOUNTING</b>	surface (ceiling, wall, floor)																		

# Strip 36

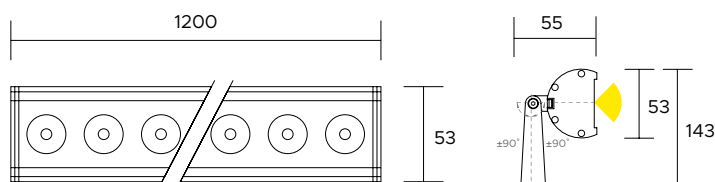

A A+ A++



A A+ A++

<b>POWER SUPPLY</b>	max 36W - max 350mA
<b>CODE</b>	ST036 ■■■ □
<b>LED COLOUR</b>	<p>C - Cool white 5500°K                      N - Natural white 4000°K                      W - Warm white 3000°K                      H - Warm white 3000°K - CRI90                      Y - Warm white 2700°K                      A - Amber                      R - Red                      G - Green                      B - Blue</p>
<b>OPTICS</b>	<p>N M W X E T  </p>
<b>FINISHES</b>	G - Grey
<b>LUMEN OUTPUT SOURCE</b>	3960lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	2800lm (3000°K, 350mA, 40°)
<b>LED NUMBER</b>	36 power LEDs
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>NOTES</b>	24V version on request

<b>POWER SUPPLY</b>	max 108W - max 700mA
<b>CODE</b>	ST036 ■■■ □
<b>LED COLOUR</b>	<p>1 - RGB                      2 - AWB                      3 - A WW W</p>
<b>OPTICS</b>	<p>N M W X E T  </p>
<b>FINISHES</b>	G - Grey
<b>LUMEN OUTPUT SOURCE</b>	4680lm (RGB, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	4320lm (RGB, 700mA, 40°)
<b>LED NUMBER</b>	36 power LEDs
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 329
<b>POWER CABLE</b>	includes 1,5 mt Liyy AD8 6 x 0,35 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	surface (ceiling, wall, floor)
<b>NOTES</b>	





The enchanting simplicity of nature meets PLG design reflecting itself in the colours, shapes and shades of the ground and flowers. Nature and technology come together to create amazing and bright combinations giving a refined and pleasant lighting to gardens, parks and terraces.





# Garden Lights

L'incantevole semplicità della natura incontra il design PLG riflettendosi nei colori, nelle forme e nelle sfumature della terra e dei fiori. Natura e tecnologia si fondono insieme per creare combinazioni luminose sorprendenti ed originali donando a giardini, parchi e terrazze un' illuminazione raffinata e gradevole.









Garden lights  
Campanula  
pag. 261



Garden lights  
Petunia  
pag. 263



Garden lights  
Stick  
pag. 265



Garden lights  
Stick Bubble  
pag. 267



Garden lights  
Stelo  
pag. 269



Garden lights  
Pin  
pag. 271



Garden lights  
Firefly  
pag. 273



Garden lights  
Stem  
pag. 275



Garden lights  
Girasole  
pag. 277



Garden lights  
Iris  
pag. 279



Garden lights  
Blade  
pag. 281



Garden lights  
Blade horizontal  
pag. 283



Garden lights  
Blade adj  
pag. 285



Garden lights  
Lilium  
pag. 287



Garden lights  
Lilium 6  
pag. 289



Garden lights  
Candle  
pag. 291



Garden lights  
Ago  
pag. 293



Garden lights  
Bordo  
pag. 295



Garden lights  
Edge  
pag. 297



Garden lights  
Edge duo  
pag. 299



Garden lights  
Menhir  
pag. 301






Garden lights  
Cut X-Y  
pag. 303







# Campanula

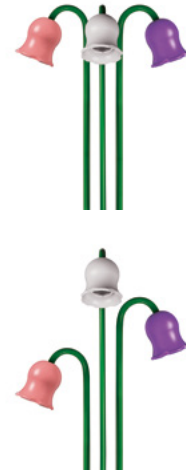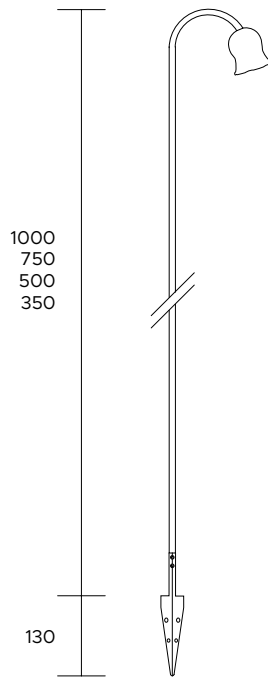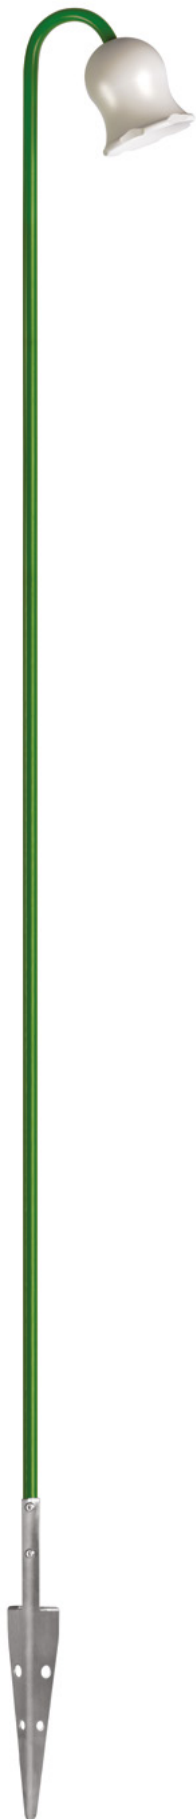



<b>POWER SUPPLY</b>	max 3W - max 700mA															
<b>CODE</b>	CMP01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: pink;">■</span> <span style="color: purple;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K															
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES (SPOTLIGHT)</b>	W - White P - Pink V - Violet															
<b>FINISHES (STEM)</b>	M - Marble Green B - Black															
<b>STEM LENGHT</b>	1 - 350mm 2 - 500mm 3 - 750mm 4 - 1000mm															
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	head in painted aluminium stem in painted brass															
<b>DRIVER</b>	not included, see pag. 324 and 326															
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	fixing (floor)															
<b>NOTES</b>	other RAL on request other heights on request 24V version on request															








# Petunia

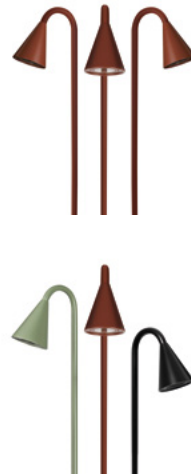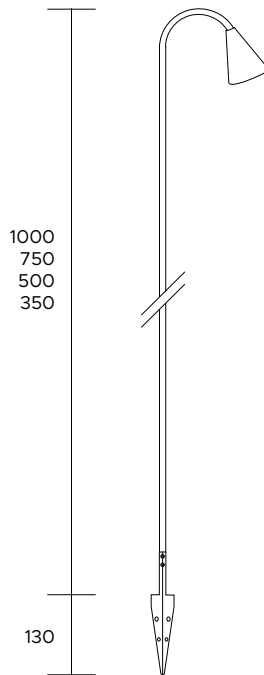


<b>POWER SUPPLY CODE</b>	max 3W - max 700mA PTN01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K															
<b>OPTICS</b>	<table border="0"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>						N	M	W	X	T	10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	G - Grey K - Corten B - Black															
<b>STEM LENGHT</b>	1 - 350mm 2 - 500mm 3 - 750mm 4 - 1000mm															
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	head in painted aluminium stem in painted brass															
<b>DRIVER</b>	not included, see pag. 324 and 326															
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	fixing (floor)															
<b>NOTES</b>	other RAL on request, other heights on request 24V version on request															




# Stick

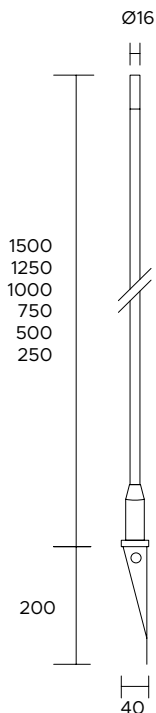



<b>POWER SUPPLY CODE</b>	max 3W - max 700mA STK01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	 360° Diffused
<b>FINISHES</b>	I - Inox AISI 316L
<b>STEM LENGHT</b>	1 - 250mm 2 - 500mm 3 - 750mm 4 - 1000mm 5 - 1250mm 6 - 1500mm
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	110lm (3000°K, 700mA, 360° Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	other heights on request 24V version on request RGB version on request



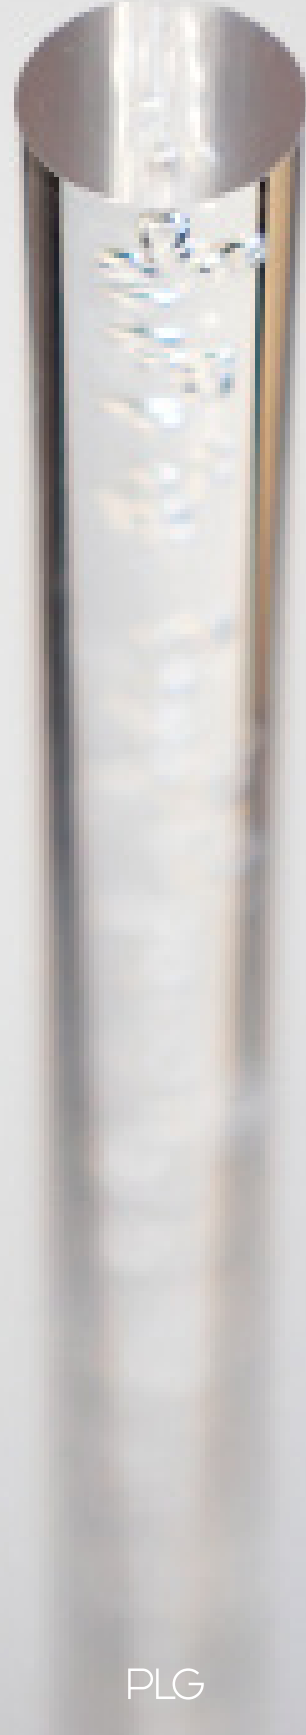

# Stick bubble

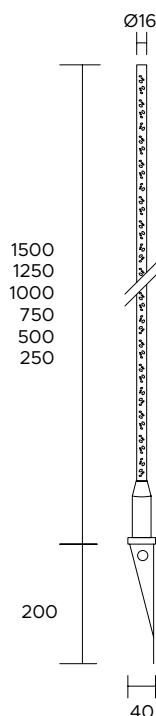



<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	STB01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: magenta;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	<b>D</b>  360° Diffused
<b>FINISHES</b>	I - Inox AISI 316L
<b>STEM LENGHT</b>	1 - 250mm 2 - 500mm 3 - 750mm 4 - 1000mm 5 - 1250mm 6 - 1500mm
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	110lm (3000°K, 700mA, 360° Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	other heights on request 24V version on request RGB version on request





# Stelo

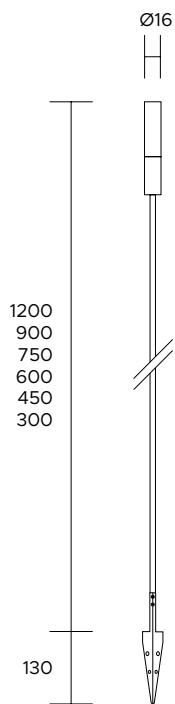

<b>POWER SUPPLY</b>	max 3W - max 700mA
<b>CODE</b>	STL01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: magenta;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	D  360° Diffused
<b>FINISHES</b>	G - Grey M - Marble Green B - Black
<b>STEM LENGHT</b>	1 - 300mm 2 - 450mm 3 - 600mm 4 - 750mm 5 - 900mm 6 - 1200mm
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)
<b>DELIVERED LUMEN OUTPUT</b>	110lm (3000°K, 700mA, 360° Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	head in painted aluminium stem in painted brass
<b>DRIVER</b>	not included, see pag. 324 and 326
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	other RAL on request other heights on request 24V version on request











## Pin

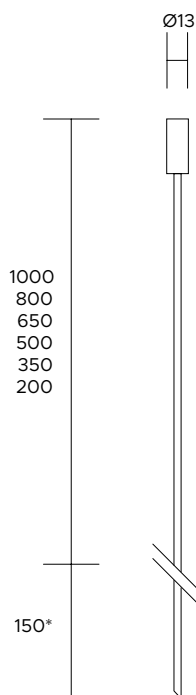


<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	PIN01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: magenta;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	D  360° Diffused
<b>FINISHES</b>	G - Grey M - Marble Green B - Black
<b>STEM LENGHT</b>	1 - 200mm 2 - 350mm 3 - 500mm 4 - 650mm 5 - 800mm 6 - 1000mm
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	90lm (3000°K, 500mA, 360° Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	head in painted aluminium stem in painted brass
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,25 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	*the recessed part changes according to the height other RAL on request other heights on request 24V version on request







# Firefly


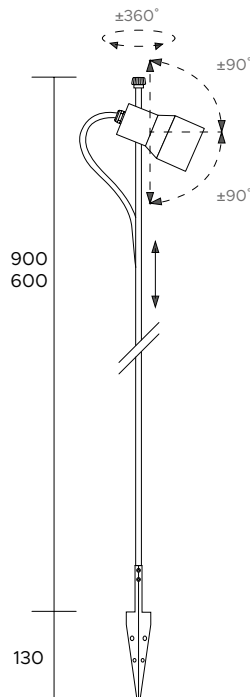


<b>POWER SUPPLY</b>	max 6W - max 500mA												
<b>CODE</b>	FRF03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: magenta;">■</span>												
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>110°</td> </tr> </table>	N	M	W	T					10°	25°	40°	110°
N	M	W	T										
10°	25°	40°	110°										
<b>FINISHES (SPOTLIGHTS)</b>	G - Grey K - Corten B - Black												
<b>STEM LENGHT</b>	1 - 600mm 2 - 900mm												
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)												
<b>DELIVERED LUMEN OUTPUT</b>	350lm (3000°K, 500mA, 40°)												
<b>LED NUMBER</b>	3 power LEDs												
<b>MATERIAL</b>	head in anodized aluminium stem in inox AISI 316L												
<b>DRIVER</b>	not included, see pag. 323 and 326												
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable												
<b>WIRING</b>	in series												
<b>MOUNTING</b>	fixing (floor)												
<b>NOTES</b>	other RAL on request 24V version on request												





# Stem

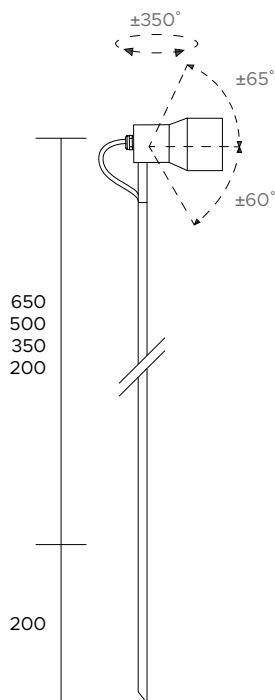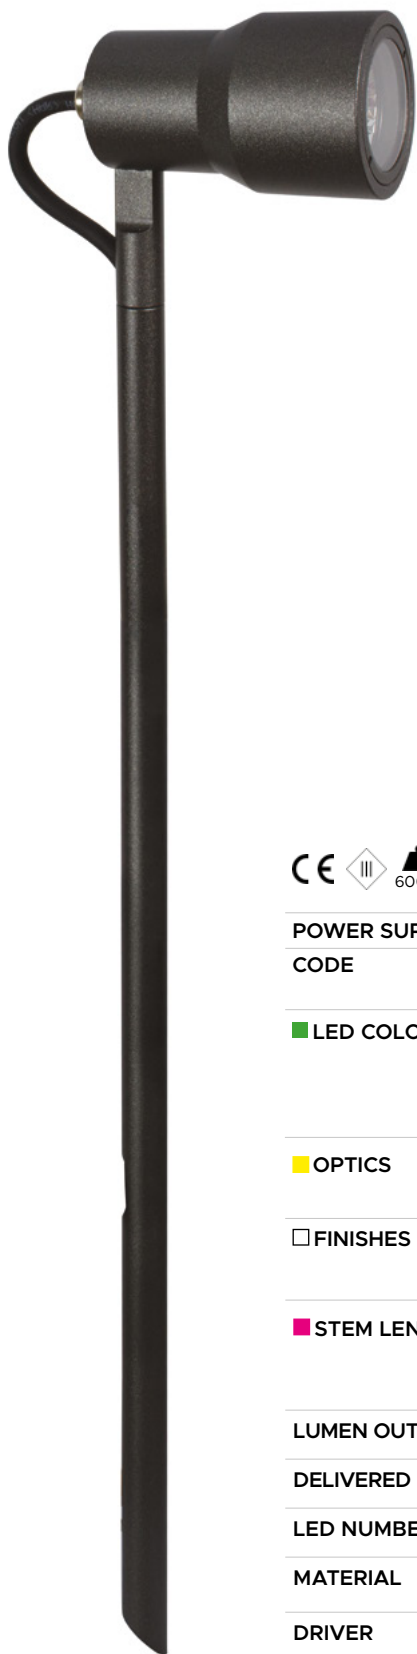


<b>POWER SUPPLY</b>	max 9W - max 500mA									
<b>CODE</b>	STM01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> with spike STM02 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> with base									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>OPTICS</b>	<table border="0"> <tr> <td style="text-align: center;">M</td> <td style="text-align: center;">W</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">24°</td> <td style="text-align: center;">36°</td> <td style="text-align: center;">60°</td> </tr> </table>	M	W	X				24°	36°	60°
M	W	X								
24°	36°	60°								
<b>FINISHES</b>	M - Marble green K - Corten G - Grey									
<b>STEM LENGHT</b>	1 - 200mm 2 - 350mm 3 - 500mm 4 - 650mm									
<b>LUMEN OUTPUT SOURCE</b>	1200lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	1010lm (3000°K, 500mA, 36°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	head in painted aluminium stem in painted inox AISI 316L									
<b>DRIVER</b>	not included, see pag. 323 and 326									
<b>POWER CABLE</b>	includes 1,5 mt Sub4 FROST- UV 2 x 0,50									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	fixing (floor)									
<b>NOTES</b>	other RAL on request 24V version on request									







# Girasole

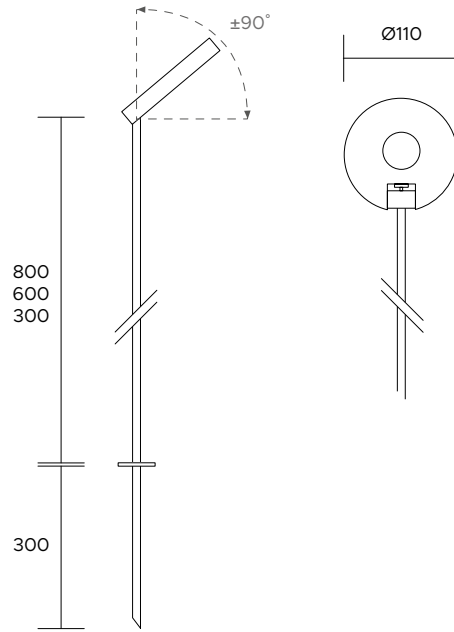


<b>POWER SUPPLY</b>	max 6W - max 350mA
<b>CODE</b>	GRS01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<span style="border: 1px solid black; display: inline-block; width: 10px; height: 10px; background-color: black;"></span> D Diffused
<b>FINISHES SPOTLIGHT</b>	M - Marble green K - Corten G - Grey
<b>STEM LENGHT</b>	1 - 300mm 2 - 600mm 3 - 800mm
<b>LUMEN OUTPUT SOURCE</b>	890lm (3000°K, 350mA)
<b>DELIVERED LUMEN OUTPUT</b>	460lm (3000°K, 350mA)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	head in painted aluminium stem in painted inox AISI 316L
<b>DRIVER</b>	not included, see pag. 322 and 326
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	24V version on request





# Iris

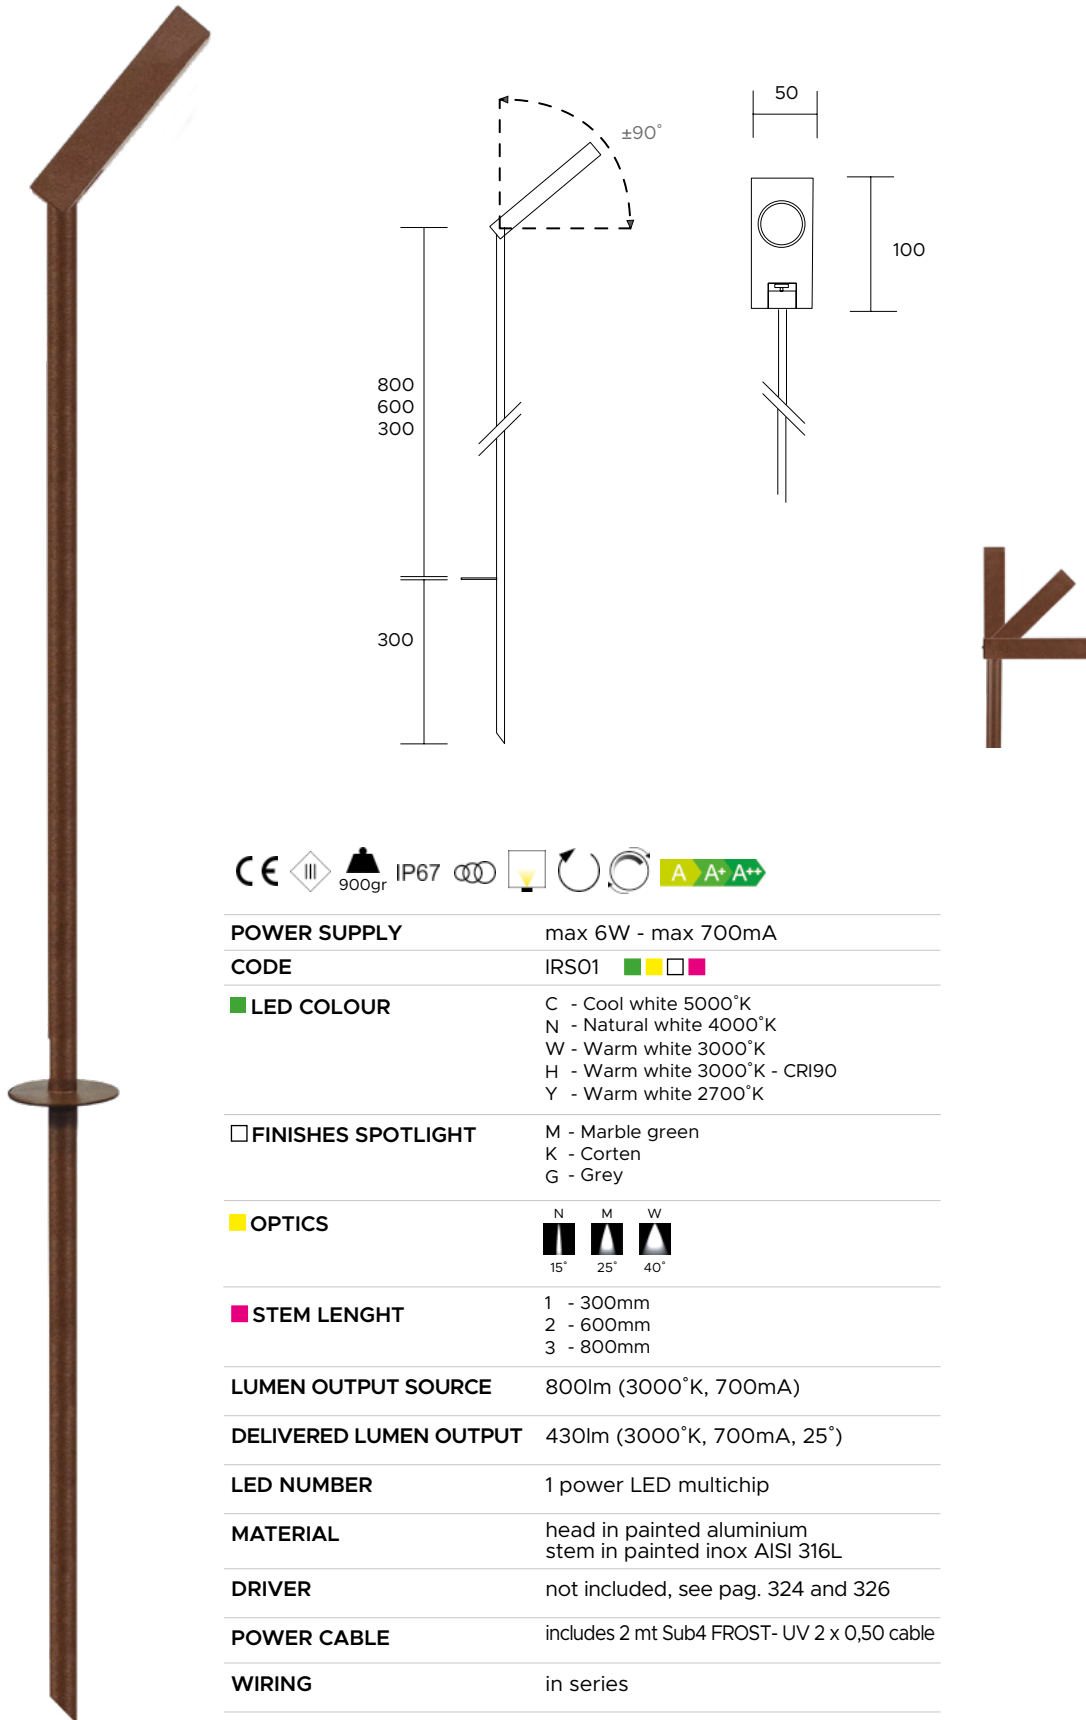


<b>POWER SUPPLY</b>	max 6W - max 700mA									
<b>CODE</b>	IRS01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: pink;">■</span>									
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K									
<b>FINISHES SPOTLIGHT</b>	M - Marble green K - Corten G - Grey									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>15°</td> <td>25°</td> <td>40°</td> </tr> </table>	N	M	W				15°	25°	40°
N	M	W								
15°	25°	40°								
<b>STEM LENGHT</b>	1 - 300mm 2 - 600mm 3 - 800mm									
<b>LUMEN OUTPUT SOURCE</b>	800lm (3000°K, 700mA)									
<b>DELIVERED LUMEN OUTPUT</b>	430lm (3000°K, 700mA, 25°)									
<b>LED NUMBER</b>	1 power LED multichip									
<b>MATERIAL</b>	head in painted aluminium stem in painted inox AISI 316L									
<b>DRIVER</b>	not included, see pag. 324 and 326									
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	fixing (floor)									
<b>NOTES</b>	24V version on request									





# Blade

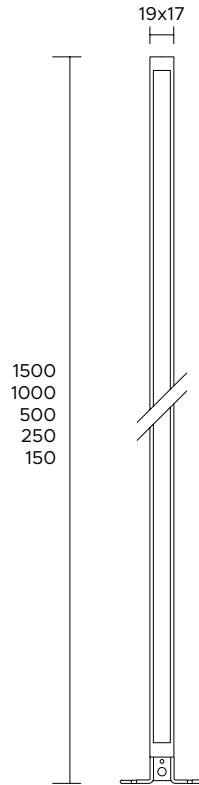


INOX PLATE : PLT01



INOX STAKE : PI005



<b>POWER SUPPLY</b>	15W/mt - 24V
<b>CODE</b>	BLD03 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: pink;">■</span>
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K
<b>OPTICS</b>	 160° Diffused
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black
<b>STEM LENGHT</b>	1 - 150mm 2 - 250mm 3 - 500mm 4 - 1000mm 5 - 1500mm
<b>LUMEN OUTPUT SOURCE</b>	1000lm/mt (3000°K)
<b>DELIVERED LUMEN OUTPUT</b>	1000lm/mt (3000°K, 160° Diff.)
<b>MATERIAL</b>	body in painted inox AISI 316L
<b>DRIVER</b>	not included, see pag. 327
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable
<b>WIRING</b>	in parallel
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	other RAL on request
<b>ACCESSORIES</b>	INOX PLATE : PLT01 INOX STAKE : PI005



BLADE HORIZONTAL






Garden lights






# Blade horizontal

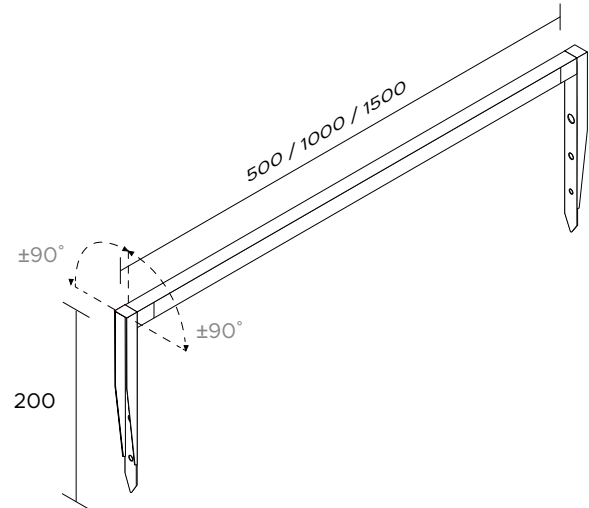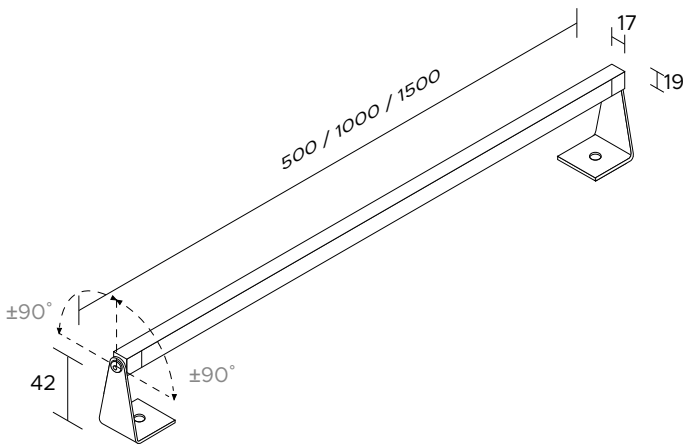

<b>POWER SUPPLY</b>	15W/mt - 24V
<b>CODE</b>	BLD01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> with brackets
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K
<b>OPTICS</b>	 160° Diffused
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black
<b>BODY LENGHT</b>	1 - 500mm 2 - 1000mm 3 - 1500mm
<b>LUMEN OUTPUT SOURCE</b>	1000lm/mt (3000°K)
<b>DELIVERED LUMEN OUTPUT</b>	1000lm/mt (3000°K, 160° Diff.)
<b>MATERIAL</b>	body in painted inox AISI 316L
<b>DRIVER</b>	not included, see pag. 327
<b>POWER CABLE</b>	includes 2 mt Sub4 Frost- UV 2 x 0,50 cable
<b>WIRING</b>	in parallel
<b>MOUNTING</b>	surface (wall, floor)
<b>NOTES</b>	other RAL on request


<b>POWER SUPPLY</b>	15W/mt - 24V
<b>CODE</b>	BLD02 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> with spikes
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K
<b>OPTICS</b>	 160° Diffused
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black
<b>BODY LENGHT</b>	1 - 500mm 2 - 1000mm 3 - 1500mm
<b>LUMEN OUTPUT SOURCE</b>	1000lm/mt (3000°K)
<b>DELIVERED LUMEN OUTPUT</b>	1000lm/mt (3000°K, 160° Diff.)
<b>MATERIAL</b>	body in anodized aluminium
<b>DRIVER</b>	not included, see pag. 327
<b>POWER CABLE</b>	includes 2 mt Sub4 Frost- UV 2 x 0,50 cable
<b>WIRING</b>	in parallel
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	other RAL on request







# Blade adj

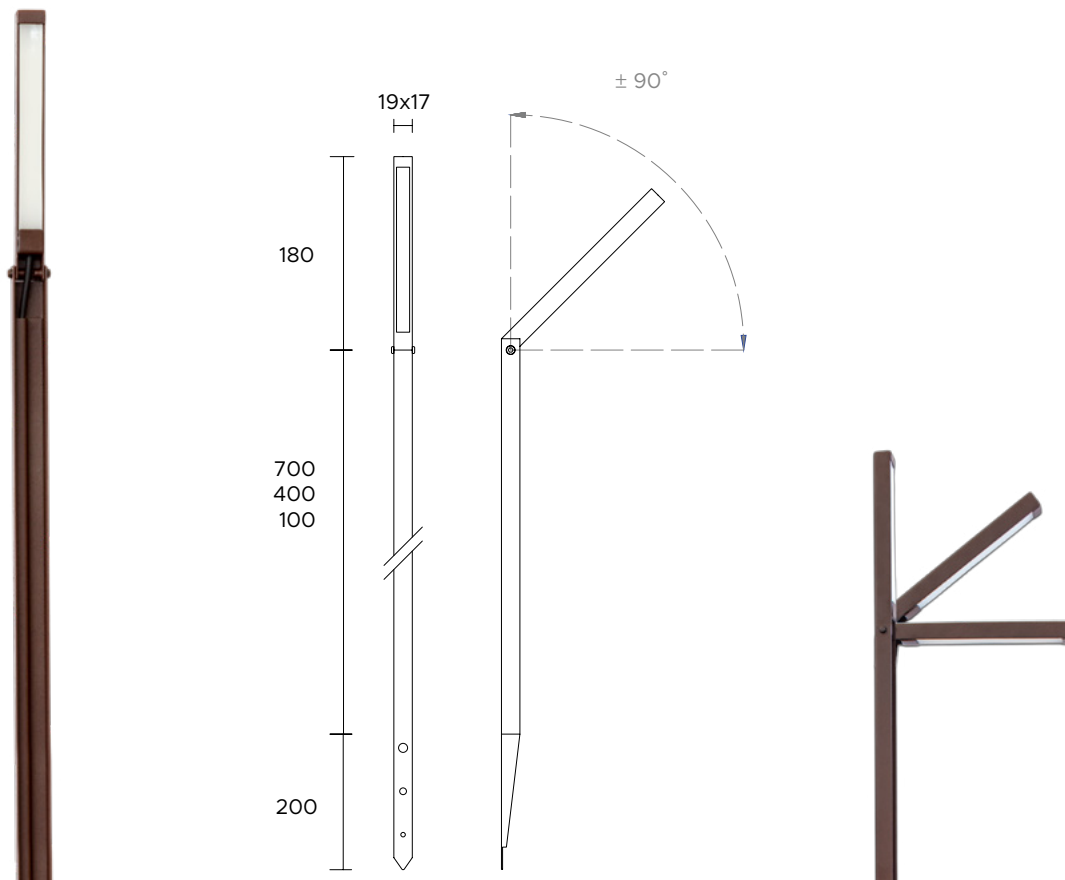



<b>POWER SUPPLY</b>	15W/mt - 24V
<b>CODE</b>	MBL01 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K
<b>OPTICS</b>	 160° Diffused
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black
<b>LUMEN OUTPUT SOURCE</b>	1000lm/mt (3000°K)
<b>DELIVERED LUMEN OUTPUT</b>	1000lm/mt (3000°K, 160° Diff.)
<b>MATERIAL</b>	body in painted inox AISI 316L
<b>DRIVER</b>	not included, see pag. 327
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST-UV 2 x 0,50 cable
<b>WIRING</b>	in parallel
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	other RAL on request







## Lilium

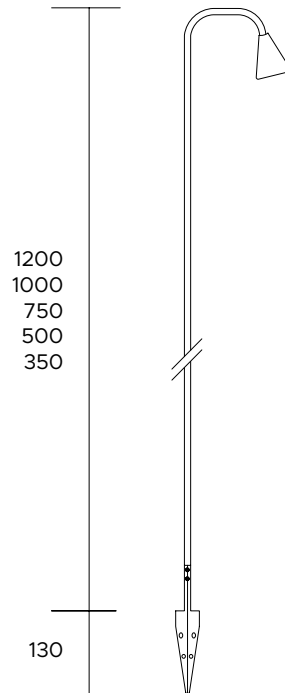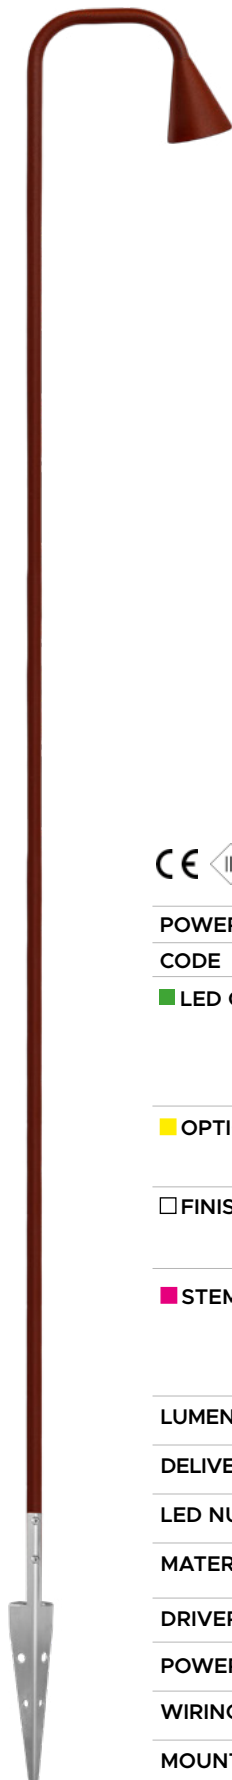

<b>POWER SUPPLY</b>	max 3W - max 700mA															
<b>CODE</b>	LIL01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: pink;">■</span> <span style="color: magenta;">■</span>															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	G - Grey K - Corten B - Black															
<b>STEM LENGHT</b>	1 - 350mm 2 - 500mm 3 - 750mm 4 - 1000mm 5 - 1200mm															
<b>LUMEN OUTPUT SOURCE</b>	190lm (3000°K, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	160lm (3000°K, 700mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	head in painted aluminium stem in painted brass															
<b>DRIVER</b>	not included, see pag. 324 and 326															
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	fixing (floor)															
<b>NOTES</b>	other RAL on request, other heights on request 24V version on request															





PLG

## Lilium 6



<b>POWER SUPPLY</b>	max 6W - max 500mA
<b>CODE</b>	LIL06 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> with spike LIL07 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> with base
<b>LED COLOUR</b>	C - Cool white 5000°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> M 24°    W 36°    X 60°
<b>FINISHES</b>	M - Marble green K - Corten G - Grey
<b>STEM LENGHT</b>	1 - 900mm 2 - 1200mm 3 - 1500mm 4 - 1900mm
<b>LUMEN OUTPUT SOURCE</b>	1200lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	1010lm (3000°K, 500mA, 36°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	head in painted aluminium stem in painted inox AISI 316L
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,75 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	other RAL on request 24V version on request











## Candle

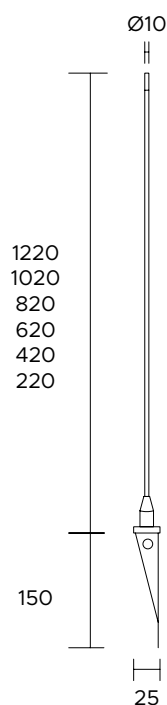

<b>POWER SUPPLY</b>	max 2W - max 500mA
<b>CODE</b>	CND01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: magenta;">■</span>
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue
<b>OPTICS</b>	D  360°
<b>FINISHES</b>	I - Inox AISI 316L
<b>STEM LENGHT</b>	1 - 220mm 2 - 420mm 3 - 620mm 4 - 820mm 5 - 1020mm 6 - 1220mm
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	90lm (3000°K, 500mA, 360° Diff.)
<b>LED NUMBER</b>	1 power LED
<b>MATERIAL</b>	body in Inox AISI 316L
<b>DRIVER</b>	not included, see pag. 323 and 326
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,50 cable
<b>WIRING</b>	in series
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	other heights on request 24V version on request




AGO




Garden lights



# Ago






<b>POWER SUPPLY</b>	9W/mt - 24V
<b>CODE</b>	AG001 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: magenta;">■</span>
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K
<b>OPTICS</b>	 160°
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black
<b>STEM LENGHT</b>	1 - 160mm 2 - 310mm 3 - 470mm 4 - 620mm
<b>LUMEN OUTPUT SOURCE</b>	610lm/mt (3000°K)
<b>DELIVERED LUMEN OUTPUT</b>	610lm/mt (3000°K, 160° Diff.)
<b>MATERIAL</b>	body in painted inox AISI 316L
<b>DRIVER</b>	not included, see pag. 327
<b>POWER CABLE</b>	includes 2 mt Sub4 FROST- UV 2 x 0,25 cable
<b>WIRING</b>	in parallel
<b>MOUNTING</b>	fixing (floor)
<b>NOTES</b>	other RAL on request





# Bordo

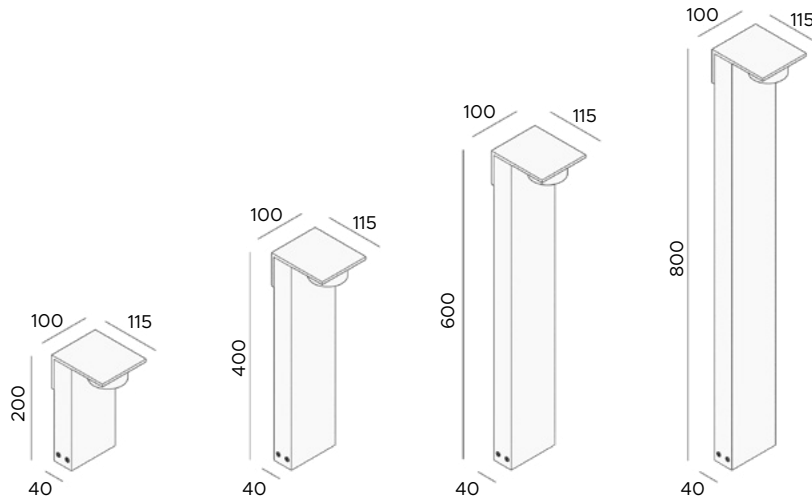
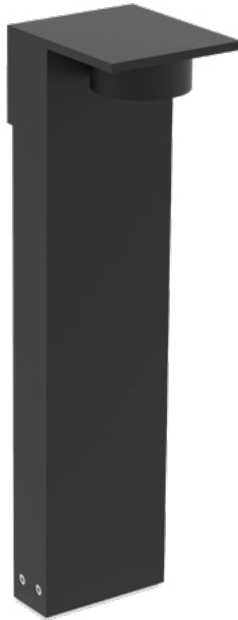




<b>POWER SUPPLY</b>	max 12W - 220V/240V
<b>CODE</b>	BRD01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span> <span style="color: magenta;">■</span>
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input checked="" type="checkbox"/> A <input type="checkbox"/> D Asymmetric Diffused
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black
<b>BODY LENGHT</b>	1 - 200mm 2 - 400mm 3 - 600mm 4 - 800mm
<b>LUMEN OUTPUT SOURCE</b>	1730lm/mt (3000°K)
<b>DELIVERED LUMEN OUTPUT</b>	1560lm/mt (3000°K, 350mA, Asymmetric)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and head in painted aluminium, base in Inox AISI 316L
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>WIRING</b>	
<b>MOUNTING</b>	fixing (floor)
<b>ACCESSORIES</b>	inox plate for ground installation in concrete; inox stake
<b>NOTES</b>	other RAL on request



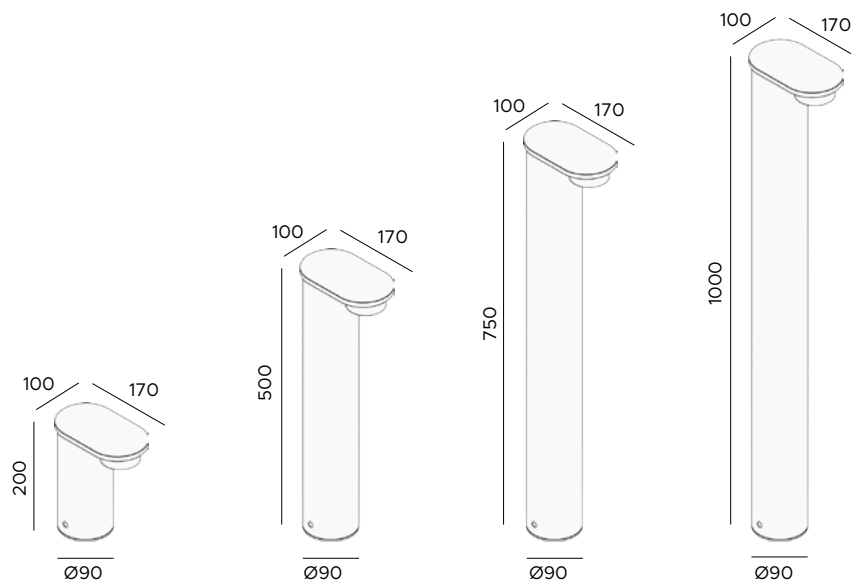

## Edge





<b>POWER SUPPLY</b>	max 12W - 220V/240V
<b>CODE</b>	EDG01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">■</span> <span style="color: magenta;">■</span>
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	  Asymmetric    Diffused
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black
<b>BODY LENGHT</b>	1 - 200mm 2 - 500mm 3 - 750mm 4 - 1000mm
<b>LUMEN OUTPUT SOURCE</b>	1730lm/mt (3000°K)
<b>DELIVERED LUMEN OUTPUT</b>	1560lm/mt (3000°K, 350mA, Asymmetric)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and base in painted AISI 316L, head in anodized and painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>WIRING</b>	
<b>MOUNTING</b>	fixing (floor)
<b>ACCESSORIES</b>	
<b>NOTES</b>	other RAL on request





## Edge duo


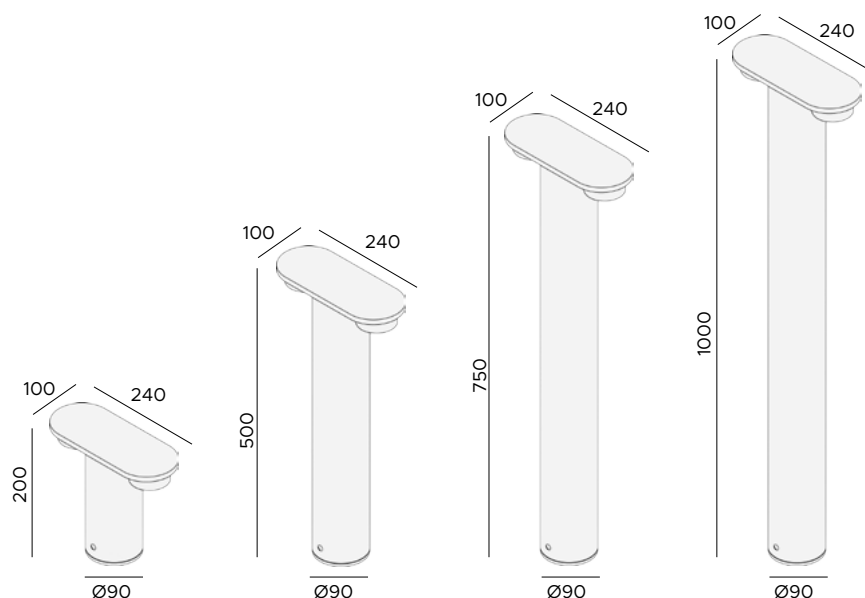










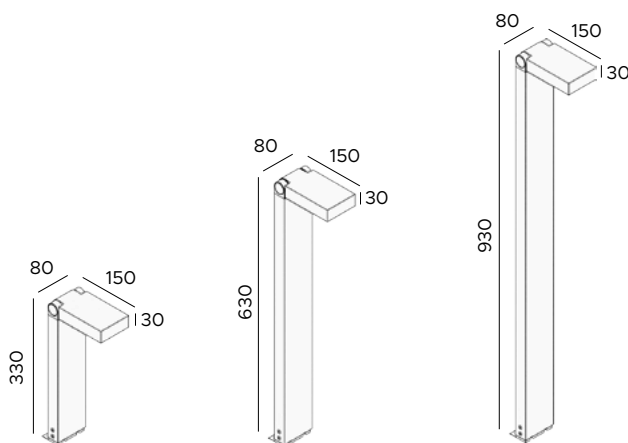



<b>POWER SUPPLY</b>	max 12W x2 - 220V/240V
<b>CODE</b>	EDD01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	<input type="checkbox"/> A <input type="checkbox"/> D Asymmetric Diffused
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black
<b>BODY LENGHT</b>	1 - 200mm 2 - 500mm 3 - 750mm 4 - 1000mm
<b>LUMEN OUTPUT SOURCE</b>	1730lm/mt (3000°K) x2
<b>DELIVERED LUMEN OUTPUT</b>	1560lm/mt ( 3000°K, 350mA, Asymmetric ) x2
<b>LED NUMBER</b>	2 power LEDs multichip
<b>MATERIAL</b>	body and base in painted AISI 316L, head in anodized and painted aluminium
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>WIRING</b>	
<b>MOUNTING</b>	fixing (floor)
<b>ACCESSORIES</b>	
<b>NOTES</b>	other RAL on request





# Menhir



<b>POWER SUPPLY</b>	max 12W - 220V/240V												
<b>CODE</b>	MNH01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: red;">■</span> <span style="color: blue;">■</span>												
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K												
<b>OPTICS</b>	<table border="0"> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>M</td> <td>W</td> <td>X</td> <td>D</td> </tr> <tr> <td>30°</td> <td>45°</td> <td>60°</td> <td>Diffused</td> </tr> </table>					M	W	X	D	30°	45°	60°	Diffused
													
M	W	X	D										
30°	45°	60°	Diffused										
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black												
<b>BODY LENGHT</b>	1 - 330mm 2 - 630mm 3 - 930mm												
<b>LUMEN OUTPUT SOURCE</b>	1730lm/mt (3000°K)												
<b>DELIVERED LUMEN OUTPUT</b>	1540lm/mt ( 3000°K, 350mA, 60°)												
<b>LED NUMBER</b>	1 power LED multichip												
<b>MATERIAL</b>	body and head in painted aluminium, base in Inox AISI 316L												
<b>DRIVER</b>	included												
<b>POWER CABLE</b>													
<b>WIRING</b>													
<b>MOUNTING</b>	fixing (floor)												
<b>ACCESSORIES</b>													
<b>NOTES</b>	other RAL on request												





CUT - X




CUT - Y

CUT - X

CUT - Y



# Cut X-Y



CUT - X




CUT - Y

<b>POWER SUPPLY</b>	max 6W - 220V/240V
<b>CODE</b>	CUT01  CUT - X CUT02  CUT - Y
<b>LED COLOUR</b>	N - Natural white 4000°K W - Warm white 3000°K H - Warm white 3000°K - CRI90 Y - Warm white 2700°K
<b>OPTICS</b>	L 180°x 8°
<b>FINISHES</b>	M - Marble green K - Corten G - Grey B - Black
<b>BODY LENGHT</b>	1 - 400mm 2 - 600mm
<b>LUMEN OUTPUT SOURCE</b>	730lm/mt (3000°K)
<b>DELIVERED LUMEN OUTPUT</b>	650lm/mt ( 3000°K, 500mA, 180°x 8°)
<b>LED NUMBER</b>	1 power LED multichip
<b>MATERIAL</b>	body and head in painted aluminium, base in Inox AISI 316L
<b>DRIVER</b>	included
<b>POWER CABLE</b>	
<b>WIRING</b>	
<b>MOUNTING</b>	fixing (floor)
<b>ACCESSORIES</b>	
<b>NOTES</b>	other RAL on request





A range of led fixtures, for underwater use, born to illuminate the interior of tanks, pools and fountains creating scenographic sceneries and spectacular light effects in total safety. The use of INOX AISI 316L makes our products absolutely suitable for underwater installations, according to the international standards of IP68 protection for permanent immersion, while maintaining a high lighting quality.

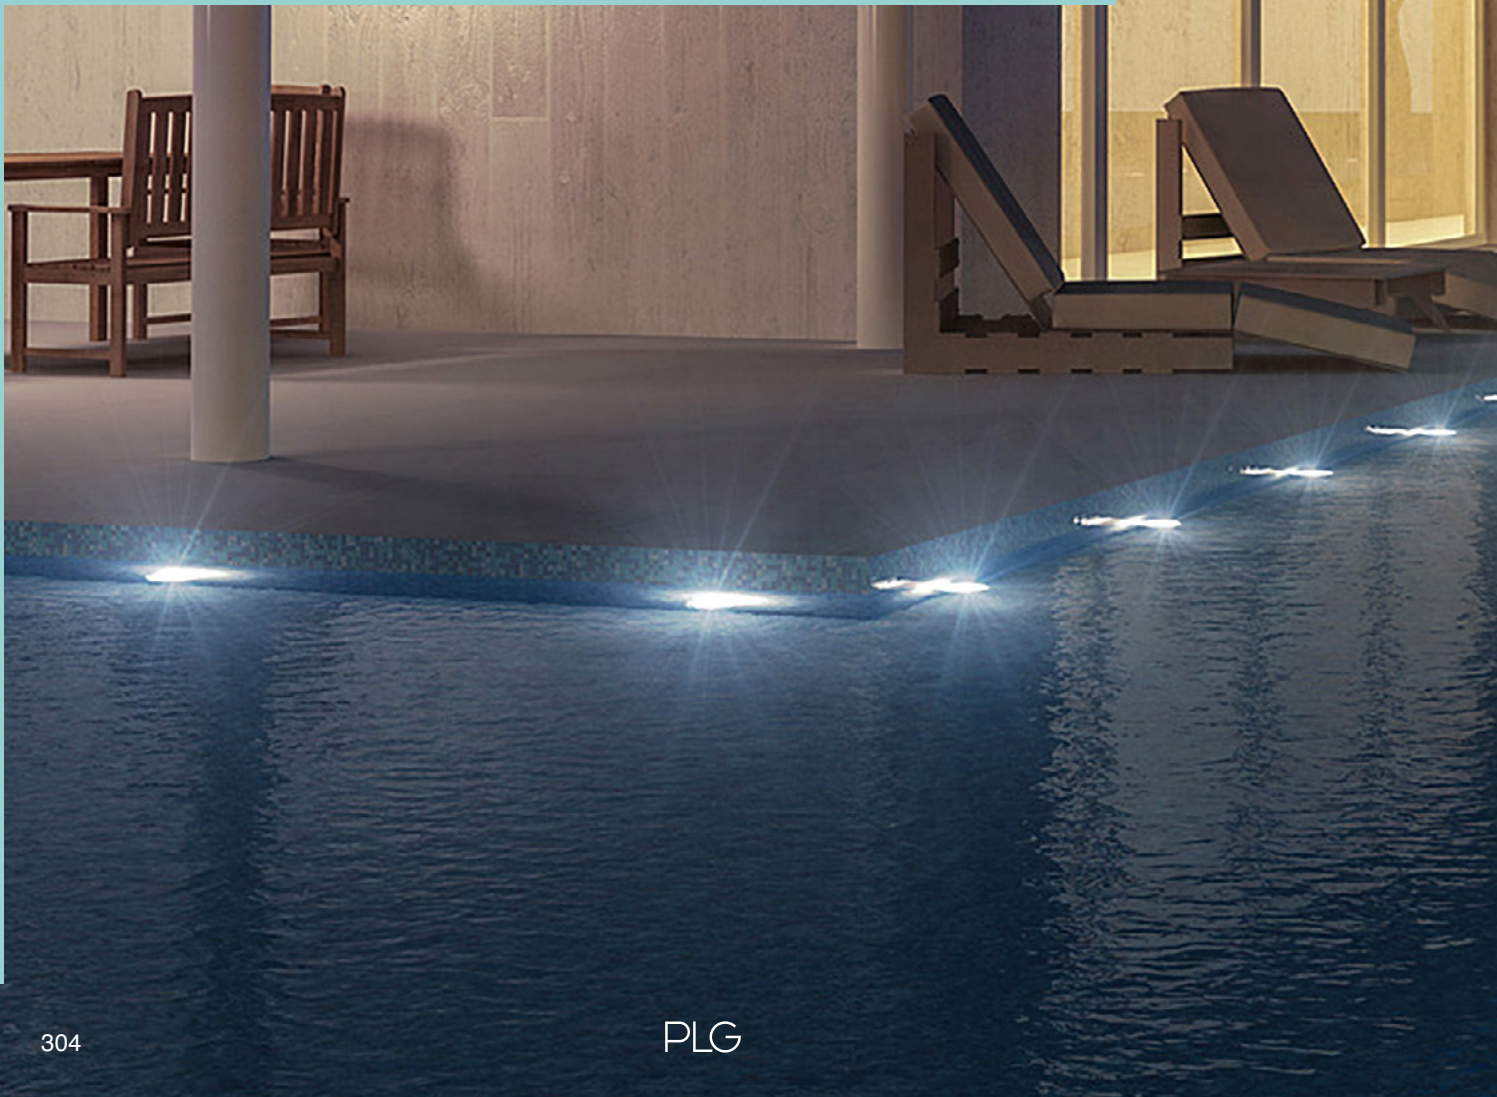



# Underwater

Una gamma di apparecchi a LED ad immersione, per illuminare l'interno di vasche, piscine e fontane creando scenari suggestivi e vistosi giochi di luce sempre in totale sicurezza. L'utilizzo dell'acciaio INOX AISI 316L rende i nostri prodotti assolutamente idonei all'installazione subacquea secondo lo standard internazionale di protezione IP68 per l'immersione continua mantenendo sempre elevata la qualità illuminotecnica.









Adjustable spotlights  
Neptun 3  
pag. 309



Adjustable spotlights  
Neptun 6  
pag. 310



Adjustable spotlights  
Neptun 12  
pag. 311



Static spotlights  
Neptun 3 screw mounted  
pag. 312



Static spotlights  
Neptun 6 screw mounted  
pag. 313



Static spotlights  
Neptun 12 screw mounted  
pag. 314



Recessed spotlights  
Proteo  
pag. 317



Recessed spotlights  
Triton  
pag. 318



Recessed spotlights  
Delphin  
pag. 319






# Underwater

Underwater - Adjustable and Static spotlights








# Neptun 3



<b>POWER SUPPLY</b>	max 6W - max 500mA															
<b>CODE</b>	NTB03 ■■■ □															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	420lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	3 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 5 mt AD8 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>ACCESSORIES</b>	tripod base code: TB001															
<b>NOTES</b>																

<b>POWER SUPPLY</b>	max 9W - max 700mA															
<b>CODE</b>	NTB03 ■■■ □															
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	390lm (RGB, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	360lm (RGB, 700mA, 40°)															
<b>LED NUMBER</b>	3 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 329															
<b>POWER CABLE</b>	includes 5 mt AD8 6 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>ACCESSORIES</b>	tripod base code: TB001															
<b>NOTES</b>																




# Neptun 6

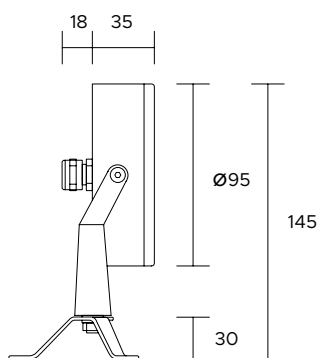

<b>POWER SUPPLY</b>	max 12W - max 500mA															
<b>CODE</b>	NTB06 ■■■□															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	900lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	860lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	6 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 5 mt AD8 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>ACCESSORIES</b>	tripod base code: TB002															
<b>NOTES</b>																

<b>POWER SUPPLY</b>	max 18W - max 700mA															
<b>CODE</b>	NTB06 ■■■□															
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	780lm (RGB, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	720lm (RGB, 700mA, 40°)															
<b>LED NUMBER</b>	6 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 329															
<b>POWER CABLE</b>	includes 5 mt AD8 6 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>ACCESSORIES</b>	tripod base code: TB002															
<b>NOTES</b>																

# Neptun 12


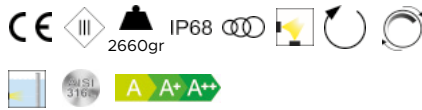
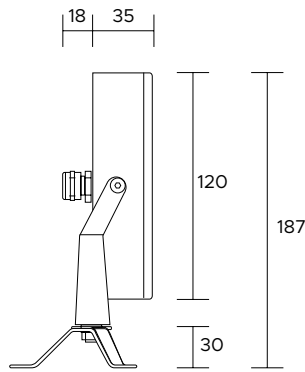


<b>POWER SUPPLY</b>	max 24W - max 500mA															
<b>CODE</b>	NTB12 ■■■□															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	1800lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	1690lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	12 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 5 mt AD8 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>ACCESSORIES</b>	tripod base code: TB003															
<b>NOTES</b>																

<b>POWER SUPPLY</b>	max 36W - max 700mA															
<b>CODE</b>	NTB12 ■■■□															
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	1560lm (RGB, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	1440lm (RGB, 700mA, 40°)															
<b>LED NUMBER</b>	12 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 329															
<b>POWER CABLE</b>	includes 5 mt AD8 6 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>ACCESSORIES</b>	tripod base code: TB003															
<b>NOTES</b>																



## Neptun 3

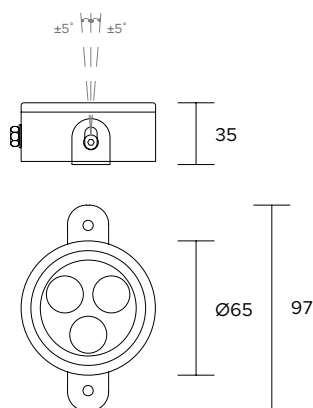

**POWER SUPPLY** max 6W - max 500mA

**CODE** NTF03 ■■■□

**LED COLOUR**  
 C - Cool white 5500°K  
 N - Natural white 4000°K  
 W - Warm white 3000°K  
 Y - Warm white 2700°K  
 A - Amber  
 R - Red  
 G - Green  
 B - Blue

**OPTICS**

N	M	W	X	T
10°	25°	40°	60°	110°

**FINISHES** I - Inox AISI 316L

**LUMEN OUTPUT SOURCE** 450lm (3000°K, 500mA)

**DELIVERED LUMEN OUTPUT** 420lm (3000°K, 500mA, 40°)

**LED NUMBER** 3 power LEDs

**MATERIAL** Inox AISI 316L

**DRIVER** not included, see pag. 323 and 326

**POWER CABLE** includes 5 mt AD8 2 x 0,50 cable

**WIRING** in series

**MOUNTING** surface (wall, floor)

**NOTES**

max 9W - max 700mA

NTF03 ■■■□

1 - RGB  
 2 - AWB  
 3 - A WW W

**OPTICS**

N	M	W	X	T
10°	25°	40°	60°	110°

I - Inox AISI 316L

390lm (RGB, 700mA)

360lm (RGB, 700mA, 40°)

3 power LEDs

Inox AISI 316L



not included, see pag. 329

includes 5 mt AD8 6 x 0,35 cable

in series

surface (wall, floor)




# Neptun 6

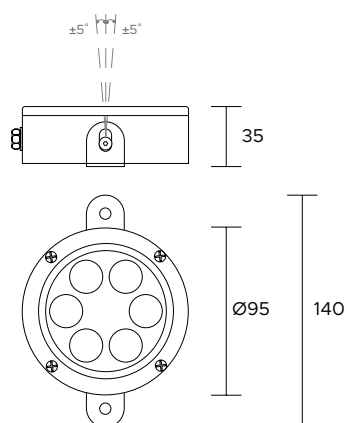

<b>POWER SUPPLY</b>	max 12W - max 500mA															
<b>CODE</b>	NTF06 ■■■□															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	900lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	860lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	6 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 5 mt AD8 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>NOTES</b>																

<b>POWER SUPPLY</b>	max 18W - max 700mA															
<b>CODE</b>	NTF06 ■■■□															
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	780lm (RGB, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	720lm (RGB, 700mA, 40°)															
<b>LED NUMBER</b>	6 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 329															
<b>POWER CABLE</b>	includes 5 mt AD8 6 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>NOTES</b>																

# Neptun 12

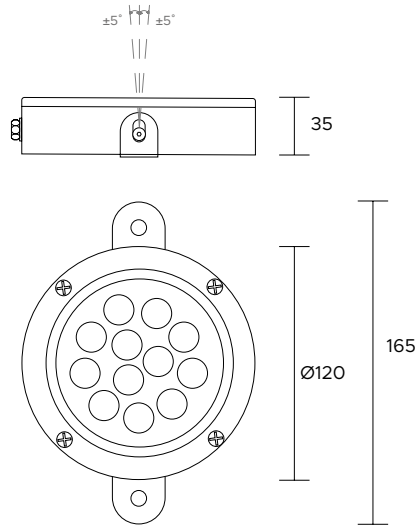

<b>POWER SUPPLY</b>	max 24W - max 500mA															
<b>CODE</b>	NTF12 ■■■□															
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	1800lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	1690lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	12 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 5 mt AD8 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>NOTES</b>																



<b>POWER SUPPLY</b>	max 36W - max 700mA															
<b>CODE</b>	NTF12 ■■■□															
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W															
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	1560lm (RGB, 700mA)															
<b>DELIVERED LUMEN OUTPUT</b>	1440lm (RGB, 700mA, 40°)															
<b>LED NUMBER</b>	12 power LEDs															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 329															
<b>POWER CABLE</b>	includes 5 mt AD8 6 x 0,35 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	surface (wall, floor)															
<b>NOTES</b>																












# Proteo

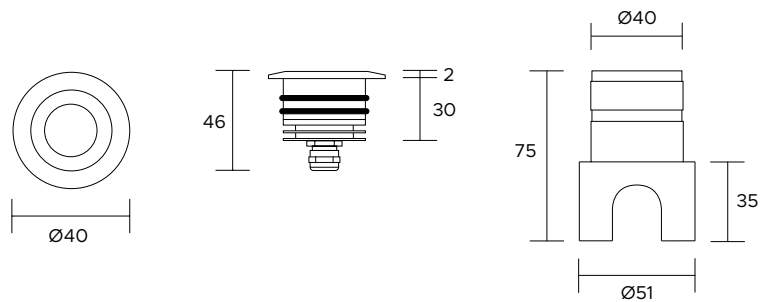

<b>POWER SUPPLY</b>	max 2W - max 500mA															
<b>CODE</b>	PRT01 <span style="color: green;">■</span> <span style="color: yellow;">■</span> <span style="color: white;">□</span>															
<b>LED COLOUR</b>	<ul style="list-style-type: none"> <li>C - Cool white 5500°K</li> <li>N - Natural white 4000°K</li> <li>W - Warm white 3000°K</li> <li>Y - Warm white 2700°K</li> <li>A - Amber</li> <li>R - Red</li> <li>G - Green</li> <li>B - Blue</li> </ul>															
<b>OPTICS</b>	<table border="0" style="width: 100%; text-align: center;"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>X</td> <td>T</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>60°</td> <td>110°</td> </tr> </table>	N	M	W	X	T						10°	25°	40°	60°	110°
N	M	W	X	T												
10°	25°	40°	60°	110°												
<b>FINISHES</b>	I - Inox AISI 316L															
<b>LUMEN OUTPUT SOURCE</b>	150lm (3000°K, 500mA)															
<b>DELIVERED LUMEN OUTPUT</b>	120lm (3000°K, 500mA, 40°)															
<b>LED NUMBER</b>	1 power LED															
<b>MATERIAL</b>	Inox AISI 316L															
<b>DRIVER</b>	not included, see pag. 323 and 326															
<b>POWER CABLE</b>	includes 5 mt AD8 2 x 0,50 cable															
<b>WIRING</b>	in series															
<b>MOUNTING</b>	recessed (wall, floor)															
<b>ACCESSORIES</b>	PVC outer case code PT990															
<b>NOTES</b>	24V version on request															


## Triton



<b>POWER SUPPLY</b>	max 6W - max 500mA								
<b>CODE</b>	TRT03 ■■■□								
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue								
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>110°</td> </tr> </table>	N	M	W	T	10°	25°	40°	110°
N	M	W	T						
10°	25°	40°	110°						
<b>FINISHES</b>	I - Inox AISI 316L								
<b>LUMEN OUTPUT SOURCE</b>	450lm (3000°K, 500mA)								
<b>DELIVERED LUMEN OUTPUT</b>	350lm (3000°K, 500mA, 40°)								
<b>LED NUMBER</b>	3 power LEDs								
<b>MATERIAL</b>	Inox AISI 316L								
<b>DRIVER</b>	not included, see pag. 323 and 326								
<b>POWER CABLE</b>	includes 5 mt AD8 2 x 0,50 cable								
<b>WIRING</b>	in series								
<b>MOUNTING</b>	recessed (wall, floor)								
<b>ACCESSORIES</b>	PVC outer case code TR990								
<b>NOTES</b>	24V version on request								

<b>POWER SUPPLY</b>	max 9W - max 700mA								
<b>CODE</b>	TRT03 ■■■□								
<b>LED COLOUR</b>	1 - RGB 2 - AWB 3 - A WW W								
<b>OPTICS</b>	<table border="1"> <tr> <td>N</td> <td>M</td> <td>W</td> <td>T</td> </tr> <tr> <td>10°</td> <td>25°</td> <td>40°</td> <td>110°</td> </tr> </table>	N	M	W	T	10°	25°	40°	110°
N	M	W	T						
10°	25°	40°	110°						
<b>FINISHES</b>	I - Inox AISI 316L								
<b>LUMEN OUTPUT SOURCE</b>	390lm (RGB, 700mA)								
<b>DELIVERED LUMEN OUTPUT</b>	360lm (RGB, 700mA, 40°)								
<b>LED NUMBER</b>	3 power LEDs								
<b>MATERIAL</b>	Inox AISI 316L								
<b>DRIVER</b>	not included, see pag. 329								
<b>POWER CABLE</b>	includes 5 mt AD8 6 x 0,35 cable								
<b>WIRING</b>	in series								
<b>MOUNTING</b>	recessed (wall, floor)								
<b>ACCESSORIES</b>	PVC outer case code TR990								
<b>NOTES</b>	24V version on request								

# Delphin

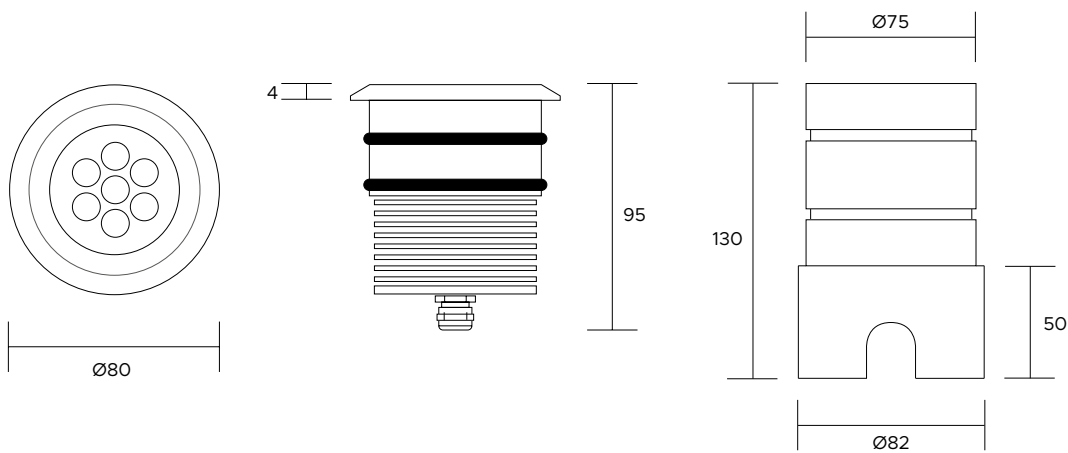

<b>POWER SUPPLY</b>	max 14W - max 500mA									
<b>CODE</b>	DP007 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>									
<b>LED COLOUR</b>	C - Cool white 5500°K N - Natural white 4000°K W - Warm white 3000°K Y - Warm white 2700°K A - Amber R - Red G - Green B - Blue									
<b>OPTICS</b>	<table border="0"> <tr> <td>N</td> <td>M</td> <td>P</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>10°</td> <td>25°</td> <td>35°</td> </tr> </table>	N	M	P				10°	25°	35°
N	M	P								
10°	25°	35°								
<b>FINISHES</b>	I - Inox AISI 316L									
<b>LUMEN OUTPUT SOURCE</b>	1050lm (3000°K, 500mA)									
<b>DELIVERED LUMEN OUTPUT</b>	900lm (3000°K, 500mA, 35°)									
<b>LED NUMBER</b>	7 power LEDs									
<b>MATERIAL</b>	Inox AISI 316L									
<b>DRIVER</b>	not included, see pag. 323 and 329									
<b>POWER CABLE</b>	includes 5 mt AD8 2 x 0,50 cable									
<b>WIRING</b>	in series									
<b>MOUNTING</b>	recessed (wall, floor)									
<b>ACCESSORIES</b>	PVC outer case code DP990									
<b>NOTES</b>	24V version on request									




# Controllers

Ogni apparecchio PLG richiede l'abbinamento del giusto alimentatore che deve essere scelto in base al numero massimo di LED collegabili. In ogni scheda tecnica dei dispositivi PLG è segnata la potenza espressa in Watt e la relativa corrente di alimentazione (es.1W/350mA). Alcuni prodotti sono disponibili con alimentazione a 24V.

Every PLG unit needs the correct driver which has to be selected according to the maximum number of leds that can be connected. In each PLG datasheet you will find the unit's power in watt and the current to be used (e.g. 1W/350mA). Some products are available in 24V.


# Drivers 250mA



<b>CODE</b>	AL1025
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	10W
<b>V OUT</b>	3÷40V
<b>SIZE</b>	75,5x39x22,3
<b>IP RATE</b>	IP20



<b>CODE</b>	AL2502
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	6W
<b>V OUT</b>	2 ÷ 23V
<b>SIZE</b>	40x50x22
<b>IP RATE</b>	IP20




<b>CODE</b>	ALT01
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	10W
<b>V OUT</b>	21÷40V
<b>SIZE</b>	Ø42,19x20,1
<b>IP RATE</b>	IP20

# Drivers 350mA




<b>CODE</b>	AL117
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	8W
<b>V OUT</b>	2÷23V
<b>SIZE</b>	57x31x21
<b>IP RATE</b>	IP20



<b>CODE</b>	AL122
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	14W
<b>V OUT</b>	2÷40V
<b>SIZE</b>	80x34x19,4
<b>IP RATE</b>	IP20



<b>CODE</b>	AL112
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	16W
<b>V OUT</b>	12÷48V
<b>SIZE</b>	77x40x29
<b>IP RATE</b>	IP42



<b>CODE</b>	AL3591
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	35W
<b>V OUT</b>	28÷100V
<b>SIZE</b>	84x57x29,5
<b>IP RATE</b>	IP42



<b>CODE</b>	ALSN1
<b>VOLTAGE</b>	200÷240V
<b>POWER</b>	4W
<b>V OUT</b>	3÷12V
<b>SIZE</b>	38x30x23,5
<b>IP RATE</b>	IP66




<b>CODE</b>	AL1314
<b>VOLTAGE</b>	200÷240V
<b>POWER</b>	18W
<b>V OUT</b>	6÷48V
<b>SIZE</b>	140x30x22
<b>IP RATE</b>	IP67




# Drivers 500mA




<b>CODE</b>	AL118
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	6W
<b>V OUT</b>	2÷11V
<b>SIZE</b>	57x31x21
<b>IP RATE</b>	IP20




<b>CODE</b>	AL123
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	12W
<b>V OUT</b>	2÷23V
<b>SIZE</b>	80x34x19,4
<b>IP RATE</b>	IP20




<b>CODE</b>	AL124
<b>VOLTAGE</b>	110÷240V
<b>POWER</b>	12W
<b>V OUT</b>	2÷31V
<b>SIZE</b>	50x62x22
<b>IP RATE</b>	IP20




<b>CODE</b>	ALT02
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	20W
<b>V OUT</b>	30÷40V
<b>SIZE</b>	Ø56,5x25
<b>IP RATE</b>	IP20



<b>CODE</b>	AL1051
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	10W
<b>V OUT</b>	3÷20V
<b>SIZE</b>	75,5x39x22,3
<b>IP RATE</b>	IP20




<b>CODE</b>	AL021
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	28W
<b>V OUT</b>	28÷56V
<b>SIZE</b>	125x38x23
<b>IP RATE</b>	IP20



<b>CODE</b>	ALSN2
<b>VOLTAGE</b>	200÷240V
<b>POWER</b>	4W
<b>V OUT</b>	3÷9,5V
<b>SIZE</b>	38x30x23,5
<b>IP RATE</b>	IP66



# Drivers 700mA




<b>CODE</b>	AL1070
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	10W
<b>V OUT</b>	3÷14V
<b>SIZE</b>	75,5x39x22,3
<b>IP RATE</b>	IP20



<b>CODE</b>	AL3312
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	35W
<b>V OUT</b>	15÷50V
<b>SIZE</b>	84x57x29,5
<b>IP RATE</b>	IP42



<b>CODE</b>	ALSN3
<b>VOLTAGE</b>	200÷240V
<b>POWER</b>	4W
<b>V OUT</b>	3÷6V
<b>SIZE</b>	38x30x23,5
<b>IP RATE</b>	IP66



<b>CODE</b>	AL700
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	6W
<b>V OUT</b>	2÷8V
<b>SIZE</b>	40x50x22
<b>IP RATE</b>	IP20

## Driver 1050mA



<b>CODE</b>	AL1050
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	50W
<b>V OUT</b>	9÷48V
<b>SIZE</b>	162,5x42,5x32
<b>IP RATE</b>	IP67

## Driver 1200mA



<b>CODE</b>	AL1200
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	6W
<b>V OUT</b>	2,5÷5V
<b>SIZE</b>	57x31x21
<b>IP RATE</b>	IP20

## Driver 1400mA



<b>CODE</b>	AL1400
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	60W
<b>V OUT</b>	9÷42V
<b>SIZE</b>	162,5x42,5x32
<b>IP RATE</b>	IP67


# Multicurrent Drivers



<b>CODE</b>	AL1015
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	15W max
<b>V OUT</b>	variabile
<b>SIZE</b>	115x21,5x19
<b>IP RATE</b>	IP20




<b>CODE</b>	AL032
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	34W max
<b>V OUT</b>	variable
<b>SIZE</b>	97x33,5x30
<b>IP RATE</b>	IP20




<b>CODE</b>	AL315
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	50W max
<b>V OUT</b>	variable
<b>SIZE</b>	124x79x22
<b>IP RATE</b>	IP20

# Dimmable Driver



PUSH diagram - Collegamento PUSH



1...10 V diagram - Collegamento 1...10V

<b>CODE</b>	DAL1
<b>VOLTAGE</b>	220÷240V
<b>POWER</b>	20W
<b>V OUT</b>	variable
<b>SIZE</b>	110x52x22
<b>IP RATE</b>	IP20

# Drivers 24V



<b>CODE</b>	AL018
<b>VOLTAGE</b>	200÷240V
<b>POWER</b>	18W
<b>V OUT</b>	24V
<b>SIZE</b>	140x30x22
<b>IP RATE</b>	IP67




<b>CODE</b>	AL035
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	35W
<b>V OUT</b>	24V
<b>SIZE</b>	148x40x30
<b>IP RATE</b>	IP67



<b>CODE</b>	AL060
<b>VOLTAGE</b>	100÷240V
<b>POWER</b>	60W
<b>V OUT</b>	24V
<b>SIZE</b>	162,5x42,5x32
<b>IP RATE</b>	IP67



POWER BOX 1W e POWER BOX 3W controllano l'intera linea di cambiacolori PLG tramite un segnale DMX o in modo indipendente. Se utilizzati in modo indipendente, permettono di selezionare un colore fisso o una sequenza di colori che può cambiare in base al tempo desiderato; è inoltre possibile scegliere fra colori saturi e colori pastello. Se utilizzati, invece, con una centralina DMX i POWER BOX 1W e POWER BOX 3W sfruttano sei canali DMX che permettono il controllo delle funzioni: colori RGB, dimmer e strobo. La connessione DMX avviene tramite connettori RJ11. I POWER BOX possono essere utilizzati come slave di altri POWER BOX dotati di display.

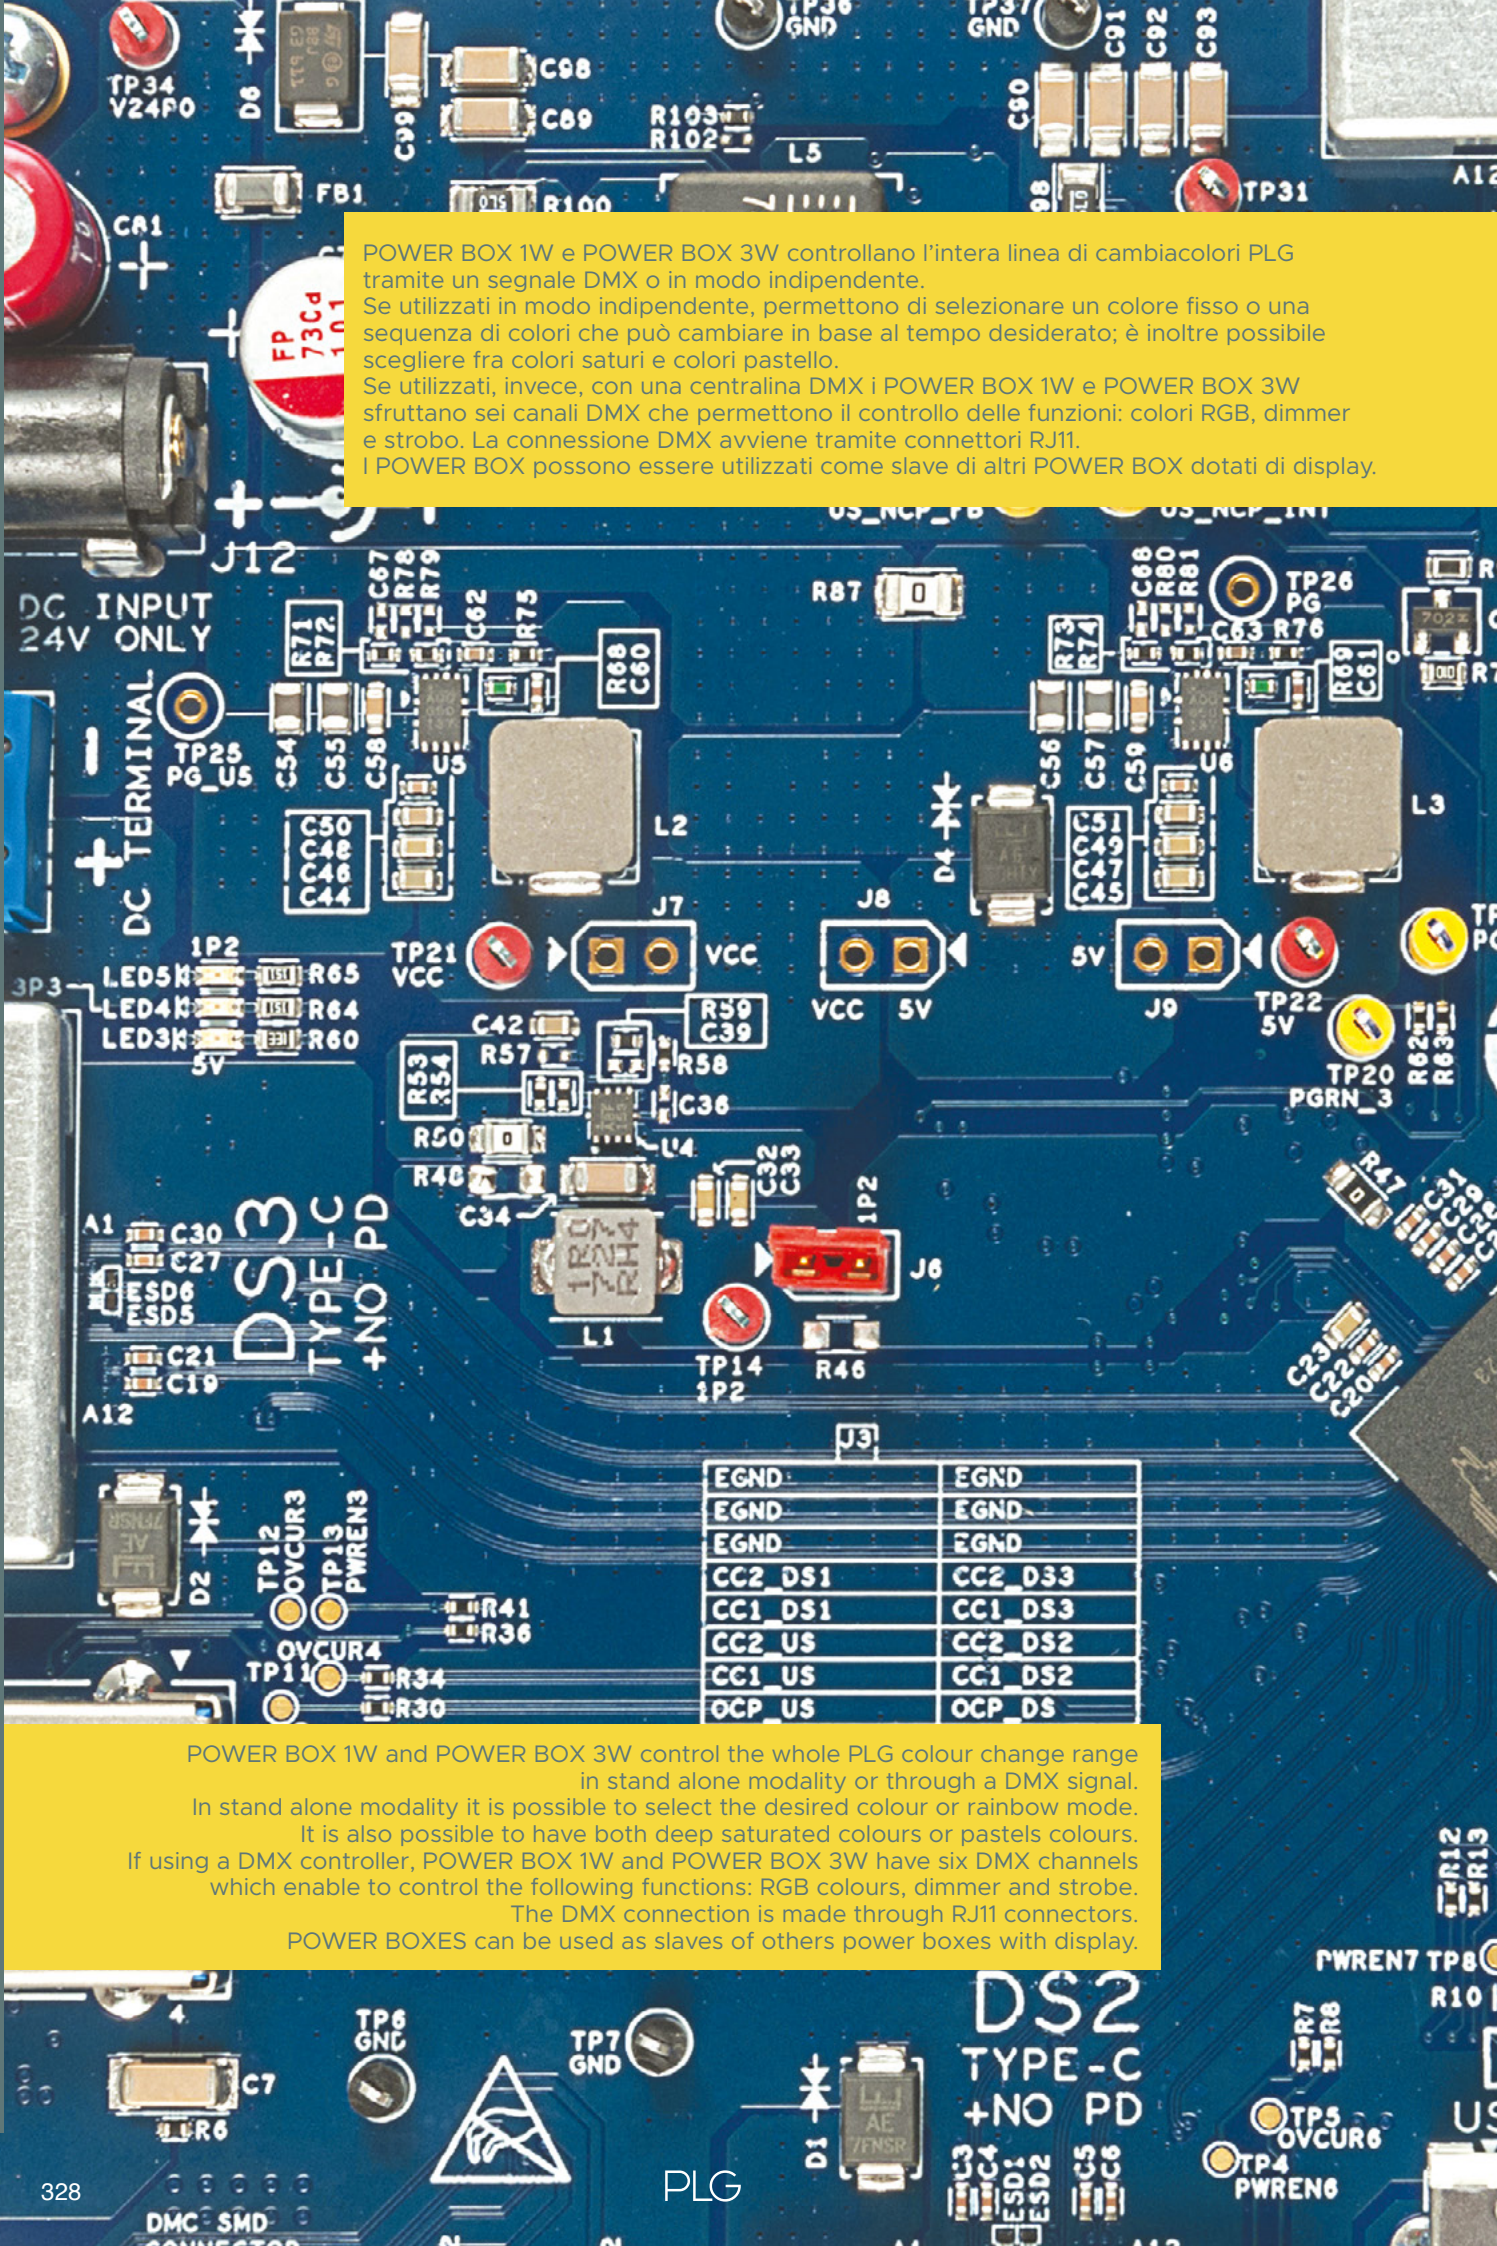


POWER BOX 1W and POWER BOX 3W control the whole PLG colour change range in stand alone modality or through a DMX signal. In stand alone modality it is possible to select the desired colour or rainbow mode. It is also possible to have both deep saturated colours or pastels colours. If using a DMX controller, POWER BOX 1W and POWER BOX 3W have six DMX channels which enable to control the following functions: RGB colours, dimmer and strobe. The DMX connection is made through RJ11 connectors. POWER BOXES can be used as slaves of others power boxes with display.

EGND	EGND
EGND	EGND
EGND	EGND
CC2 DS1	CC2 DS3
CC1 DS1	CC1 DS3
CC2 US	CC2 DS2
CC1 US	CC1 DS2
OCP US	OCP DS




## Powerbox 1W

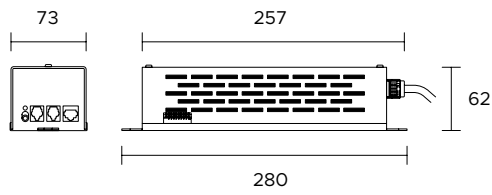

<b>CODE</b>	PB0001
<b>VOLTAGE</b>	200÷220V
<b>POWER</b>	18W
<b>V OUT</b>	24V
<b>SIZE</b>	280x73x62
<b>IP RATE</b>	IP40

## Powerbox 3W

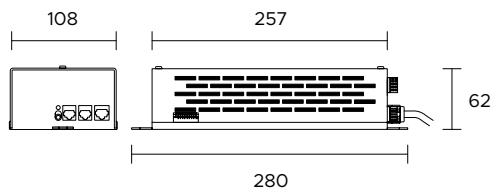

<b>CODE</b>	PB0003
<b>VOLTAGE</b>	200÷220V
<b>POWER</b>	18W
<b>V OUT</b>	24V
<b>SIZE</b>	280x108x62
<b>IP RATE</b>	IP40





PLG   
s.r.l.  
Professional Lighting Genius

40





# PLG



Ex Strada Statale 96  
70020 Toritto (Ba)  
mail: [info@plgenius.com](mailto:info@plgenius.com)  
phone: +39 080 603 244



[www.plgenius.com](http://www.plgenius.com)